



REMARKS

Horns representing four basic designs were measured for mismatch over their bands. The greatest VSWR's encountered in the various bands are as follows:

<u>Band</u>	<u>Max VSWR</u>
1.8 cm	1.10
3.2 cm	1.20
6 cm	1.25
23 cm	1.20

The horns for the other bands should have a VSWR close to that of the horns from which they were scaled.

In any event, when the horns are used in gain measurements, the VSWR should be measured at the wavelength used, and for accurate measurements the horns should be carefully matched, or allowance should be made for any mismatch. In either case the bolometer must be well-matched. The use of flange-to-flange connections rather than chokes, is recommended whenever operating at a wavelength differing from that for which the chokes were designed, since at some wavelengths choke-to-flange joints may introduce considerable mismatch.

ACCURACY

At any one wavelength the measured points showed a dispersion of less than 0.1 db. As a function of wavelength, the gain curve is not monotonic, as would be predicted from the theory, but shows small, though definite, periodic wiggles (see Fig. A-5 (b)). After exhaustive checking it is felt that these wiggles are actually present, and not due to experimental difficulties. This effect can probably be attributed to higher modes in the aperture and currents on the outside of the horn, both of which are neglected in the theory. However, since the wiggles are small, and since a tremendous amount of additional data would have to be taken to reproduce the wiggles accurately, a curve drawn through the average of the measured points was used. Taking into account all possible deviations from the true gain over each band, it was decided that the maximum possible error would be less than ± 0.3 db up to and including the 10-cm horns.

At wavelengths longer than 10 cm, where no direct experimental checks have been feasible, the gain has been calculated by means of Schelkunoff's formula. To arrive at a reasonable tolerance at these wavelengths, it was noted that below 10 cm the greatest discrepancy between the average measured gain (using Braun's correction curves² for near field effects) and the calculated gain at the same wavelength was of the order of 0.2 db. In general the difference was much less than this figure. Therefore it is felt that a tolerance of ± 0.5 db is reasonable for all horns above the 10-cm band. In all probability, the actual errors are considerably less than the maximum possible tolerances quoted.

ACKNOWLEDGMENTS

The author wishes to express his appreciation to E. H. Braun for his advice and cooperation and to F. W. Lashway for his suggestions in connection with the construction of the horns.

* * *

REFERENCES

1. Simmons, A. J., and Emerson, W. H., "An Anechoic Chamber Making Use of a New Broadband Absorbing Material," NRL Report 4193, 7 July 1953
2. Braun, E. H., "Gain of Electromagnetic Horns," Proc. I.R.E., Vol. 41, No. 1, pp. 109-115, Jan. 1953

* * *

LIST OF APPENDIX ILLUSTRATIONS

<u>Number</u>	<u>Title</u>	<u>Page</u>
Fig. A-1 (a, b)	Braun's E- and H-Plane Correction Curves	11
Fig. A-2 (a, b)	Expanded E-Plane Theoretical Gain Curve	14
Fig. A-3 (a, b)	Expanded H-Plane Theoretical Gain Curve	16
Fig. A-4 (a-f)	E- and H-Plane Field Patterns	19
Fig. A-5 (a-c)	Gain Curves and Conversion Chart	23
Fig. A-6 to A-17	Construction Drawings for the Gain-Standard Horns	26
Table A-1	Data for E- and H-Plane Theoretical Gain Curves	18
Table A-2	Summary of Gain-Standard Horn Data	22

APPENDIX
Methods for Determining Horn Dimensions and Gain

BACKGROUND

Schelkunoff's gain curves in various forms^{1,2,3} were used for determining the tentative dimensions of the horns and for obtaining a first approximation to the gain. After the aperture dimensions had been chosen and a reasonable value for l_E (the E-plane slant height) had been set, the H-plane slant height, l_H , was uniquely determined by the requirement that the flared sides of the horn meet the waveguide in the same plane (Fig. 1, p. 1). For the purpose of calculating the expected gain, this value of l_H was approximated by the relation

$$l_{H_{\text{approx.}}} = \frac{1 - \frac{w_E}{b}}{1 - \frac{w_H}{a}} l_E \quad (1)$$

where a = H-plane aperture dimension

b = E-plane aperture dimension

w_E = E-plane inside dimension of the waveguide

w_H = H-plane inside dimension of the waveguide.

After the tentative gain had been determined, the exact value of l_H was obtained from the formula

$$l_H = \frac{a}{a - w_H} \sqrt{\left[\left(l_E \right)^2 - \left(\frac{b}{2} \right)^2 \right] \left[\left(1 - \frac{w_E}{b} \right)^2 \right] + \left[\frac{a - w_H}{2} \right]^2} \quad (2)$$

¹Schelkunoff, S. A., "Electromagnetic Waves," D. Van Nostrand, Inc., New York, pp. 363-365, 1943

²Silver, S., "Microwave Antenna Theory & Design," McGraw-Hill Book Co., Inc., New York, pp. 588-589, 1949

³Schelkunoff, S. A., and Friis, H. T., "Antennas - Theory and Practice," John Wiley and Sons, Inc., New York, pp. 528-529, 1952

In using Schelkunoff's gain curves, it was found that no one family of curves in the references mentioned covered a range great enough to include all the desired sizes of horns. Furthermore, certain parts of the curves were found to be less accurate than others. To overcome these difficulties a new procedure has been devised.⁴ A brief review of the relationship of the curves to the gain formula will help to clarify the procedure. The notation is substantially that used in the recent book by Schelkunoff and Friis,³ and by Silver.²

The Schelkunoff curves give the directive gain for horns flared in either of the two principal planes; g_E is the directive gain of a sectoral horn flared in the E-plane, and g_H is the directive gain of a sectoral horn flared in the H-plane. The two sectoral gain curves are obtained from the following formulas, expressed in terms of the tabulated Fresnel integrals $C(x)$ and $S(x)$:

$$\frac{\lambda}{b} g_H = \frac{4\pi l_H}{a} \left[\left\{ C(u) - C(v) \right\}^2 + \left\{ S(u) - S(v) \right\}^2 \right] \quad (3)$$

$$\frac{\lambda}{a} g_E = \frac{64 l_E}{\pi b} \left[C^2(w) + S^2(w) \right], \quad (4)$$

where

$$u = \frac{1}{\sqrt{2}} \left(\frac{\sqrt{\lambda l_H}}{a} + \frac{a}{\sqrt{\lambda l_H}} \right)$$

$$v = \frac{1}{\sqrt{2}} \left(\frac{\sqrt{\lambda l_H}}{a} - \frac{a}{\sqrt{\lambda l_H}} \right)$$

$$w = \frac{b}{\sqrt{2\lambda l_E}}$$

λ = wavelength.

The gain of a pyramidal horn is

$$g = \frac{8\pi l_E l_H}{ab} \left[C^2(w) + S^2(w) \right] \left[\left\{ C(u) - C(v) \right\}^2 + \left\{ S(u) - S(v) \right\}^2 \right]$$

This result can easily be obtained from the two sectoral curves by multiplying together $(\lambda/a)g_E$ and $(\lambda/b)g_H$, and dividing the result by $32/\pi = 10.1859$, yielding the convenient formula

$$g = \frac{\left(\frac{\lambda}{a} g_E \right) \left(\frac{\lambda}{b} g_H \right)}{\frac{32}{\pi}} \quad (5)$$

where $\frac{\lambda}{a} g_E$ and $\frac{\lambda}{b} g_H$ are read directly from the curves.

⁴Braun, E. H., "Calculation of the Gain of Small Horns," Proc. I.R.E., Vol. 41, No. 12, pp. 1785-6, Dec. 1953

EXTENSION AND APPLICATION

Braun's method⁴ provides a convenient means of extending the range of the gain curves and eliminating the inaccuracy arising from interpolations between curves. He introduces the arbitrary factors k_E and k_H to create a fictitious horn having these dimensions:

$$\begin{aligned} a &= k_H A, & l_H &= k_H^2 L_H \\ b &= k_E B, & l_E &= k_E^2 L_E \end{aligned}$$

where A , B , L_E , and L_H are the actual horn dimensions. By choosing the proper value for k_E and k_H , one can make l_E and l_H fall exactly on one of the respective gain curves for each plane. After the gain of the fictitious horn ($g_{\text{fict.}}$) is read from the curves, the gain of the actual horn ($g_{\text{act.}}$) is obtained from the relation

$$g_{\text{act.}} = \frac{g_{\text{fict.}}}{k_E k_H}$$

Since both k_E and k_H are arbitrary, one gain curve for each plane is all that is necessary. The Schelkunoff curves for $l_E = 50\lambda$ and $l_H = 50\lambda$ are convenient for this purpose and have been accurately recomputed and plotted on an expanded scale in Figs. A-2 (a,b) and A-3 (a,b) so that they may be read with such accuracy that it is no longer necessary to make the detailed calculations involved in using the gain formula. The curves were plotted from formulas (3) and (4). The values obtained from these formulas are tabulated in Table A-1. For maximum accuracy these values may be preferable to those obtained from the curves. Linear interpolation between points will yield good accuracy. The table makes it possible to plot any desired portions of the curves on whatever scale is preferred.

An example will demonstrate the simplicity of the method.

$$\begin{aligned} \text{Actual horn: } A &= 8.13\lambda, & L_H &= 19.72\lambda \\ B &= 6.67\lambda, & L_E &= 18.52\lambda \end{aligned}$$

If it is desired to make use of the $50\text{-}\lambda$ curves referred to above, the k 's are chosen as follows:

$$\begin{aligned} k_E^2 &= \frac{50\lambda}{18.52\lambda} = 2.6998, & k_E &= 1.643, \\ k_H^2 &= \frac{50\lambda}{19.72\lambda} = 2.5355, & k_H &= 1.592. \end{aligned}$$

$$\begin{aligned} \text{Fictitious horn: } b &= k_E B = 10.96\lambda, & l_E &= 50\lambda, \\ a &= k_H A = 12.94\lambda, & l_H &= 50\lambda. \end{aligned}$$

From the $50\text{-}\lambda$ gain curves

$$\begin{aligned} \frac{\lambda}{a} g_E &= 80.77 \\ \frac{\lambda}{b} g_H &= 98.92 \end{aligned}$$

From formula (5),

$$g_{\text{fict.}} = \frac{\left(\frac{\lambda}{a} g_E\right) \left(\frac{\lambda}{b} g_H\right)}{\frac{32}{\pi}} = 784.40$$

$$g_{\text{act.}} = \frac{g_{\text{fict.}}}{k_E k_H} = 299.88, \text{ or } 24.77 \text{ db.}$$

Detailed calculations using the Fresnel integrals in the gain formula resulted in the same gain figure, 24.77 db. Similar comparisons at each of the other bands showed agreement within 0.01 db.

USE OF CORRECTION CURVES

The procedure for determining the true Fraunhofer gain from the primary gain test data, using Braun's near field correction curves, Fig. A-1 (a, b), is shown in the following example taken from actual measurements:

X-band horn dimensions: $a = 7.654 \text{ in.}$, $l_H = 13.484 \text{ in.}$

$b = 5.669 \text{ in.}$, $l_E = 12.598 \text{ in.}$

$\lambda = 3.20 \text{ cm} = 1.2598 \text{ in.}$

R (distance between horns) = 140.25 in.

$$\frac{4\pi R}{\lambda} = \frac{(12.566)(140.25)}{1.2598} = 1398.9$$

$$\text{From test data } \frac{P_T}{P_R} = \frac{11.3}{0.123} = 91.87; \quad \sqrt{\frac{P_T}{P_R}} = 9.585$$

where P_T represents power transmitted and P_R power received.

$$\text{Gain}_{\text{uncorrected}} = \frac{\frac{4\pi R}{\lambda}}{\sqrt{\frac{P_T}{P_R}}} = \frac{1398.9}{9.585} = 145.95, \text{ or } 21.64 \text{ db.}$$


Parameters for using the correction curves:

E-plane:


$$\frac{8l_E}{b^2} = \frac{(8)(12.598)}{32.13} = 3.1360$$

$$E = \left(\frac{8l_E}{b^2}\right) \lambda = (3.1360)(1.2598) = 3.951$$

$$\log \frac{\lambda R}{b^2} = \log \frac{(1.2598)(140.25)}{32.13} = \log 5.498 = 0.740$$

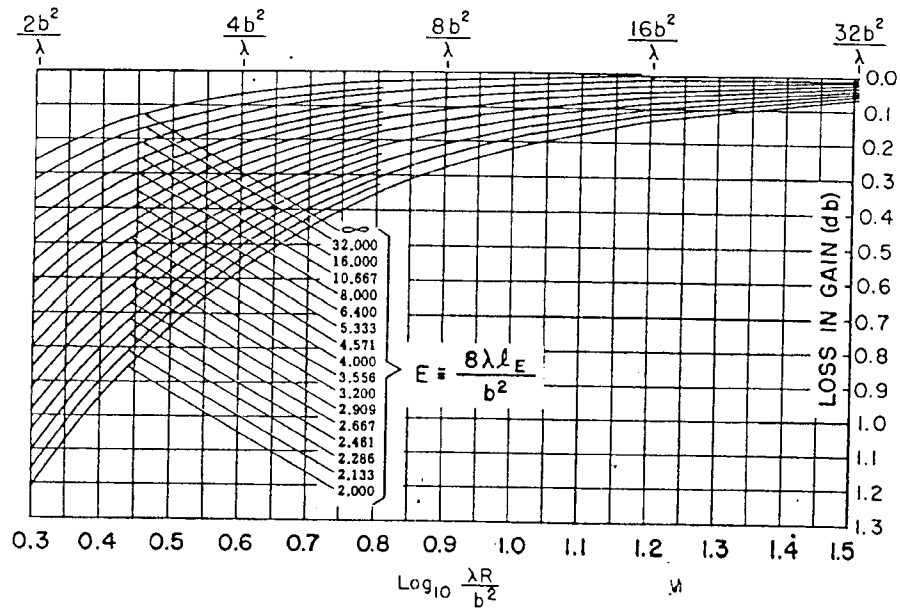

(a) E-plane

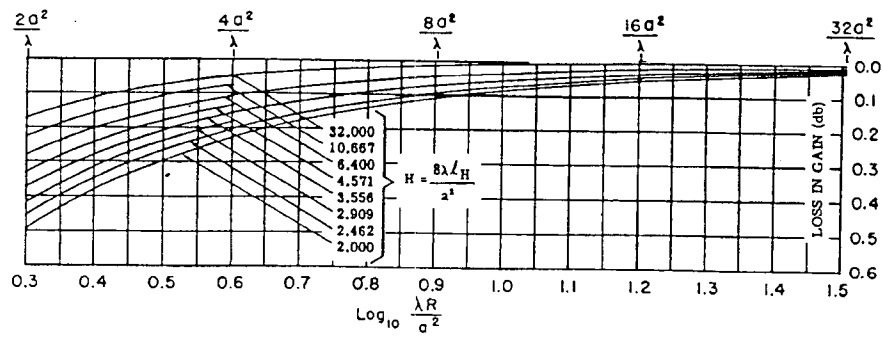

(b) H-plane

Fig. A-1 - Braun's E- and H-plane correction curves

H-plane:

$$\frac{8l_H}{a^2} = \frac{(8)(13.484)}{58.584} = 1.8413$$

$$H = \left(\frac{8l_H}{a^2} \right) \lambda = (1.8413)(1.2598) = 2.320$$

$$\log \frac{\lambda R}{a^2} = \log \frac{(1.2598)(140.25)}{58.584} = \log 3.016 = 0.479$$

Reading from the correction curves:

E-plane correction	0.22 db
H-plane correction	0.28 db
Total correction	0.50 db
Uncorrected gain (above)	21.64 db
Corrected gain	22.14 db

The calculated gain, using Schelkunoff's formula, in this case was the same: 22.14 db.

DETERMINATION OF AN OPTIMUM HORN WITH SPECIFIED GAIN AND EQUAL BEAMWIDTHS

A simple means has been devised for finding the dimensions of a horn which satisfies the following requirements:

- (1) Specified gain
- (2) Optimum horn*
- (3) Equal beamwidths at the half-power points.

Although this can be done empirically, a set of factors was determined from Schelkunoff's gain formula, which yield the required horn parameters as a function of the absolute gain, g , alone.† These are as follows:

*An optimum horn is one for which the aperture dimensions have been chosen to give maximum gain when the slant heights are held fixed. This is the case when $a^2 \cong 3.18\lambda l_H$ and $b^2 \cong 2.08\lambda l_E$

† This has been worked out by E. H. Braun in an unpublished report.

$$\frac{a}{\lambda} = 0.4675 \sqrt{g}$$

$$\frac{b}{\lambda} = 0.3463 \sqrt{g}$$

$$\frac{l_E}{\lambda} = 0.05764 g$$

$$\frac{l_H}{\lambda} = 0.06885 g$$

where a , b , l_E , and l_H are the usual parameters as defined (p.7).

A horn having these dimensions will have exactly the desired theoretical gain, and will be exactly an optimum horn. However, it should be pointed out that where a simple joint between the flared horn and the waveguide is desired, the value of l_H must be modified to make the horn fit the guide. This will change the gain by a small amount, usually a few tenths of a db, since the horn will no longer be exactly optimum. If a discrepancy of this magnitude is not important, l_H can be calculated to fit the waveguide exactly, using formula (2).

When a closer approach to the specified gain is desired, a slight change in the procedure is necessary. This is accomplished by the following steps:

- (1) Compute tentative parameters a' , b' , and l_E' in the same way as a , b , and l_E were computed above.
- (2) Obtain the approximate value, l_H' , to fit the waveguide, using formula (1), p. 7.
- (3) Calculate the tentative gain, g' , by the method outlined on p. 9 using the primed parameters.
- (4) Recompute a , b , and l_E , substituting g^2/g' for g .
- (5) Obtain the exact value of l_H from formula (2)
- (6) Recalculate the gain for the new parameters.

Since the theoretical gain is obtained very accurately in step 6, it is easy to determine the discrepancy between the desired gain and that now resulting from the adjustment to fit the waveguide.

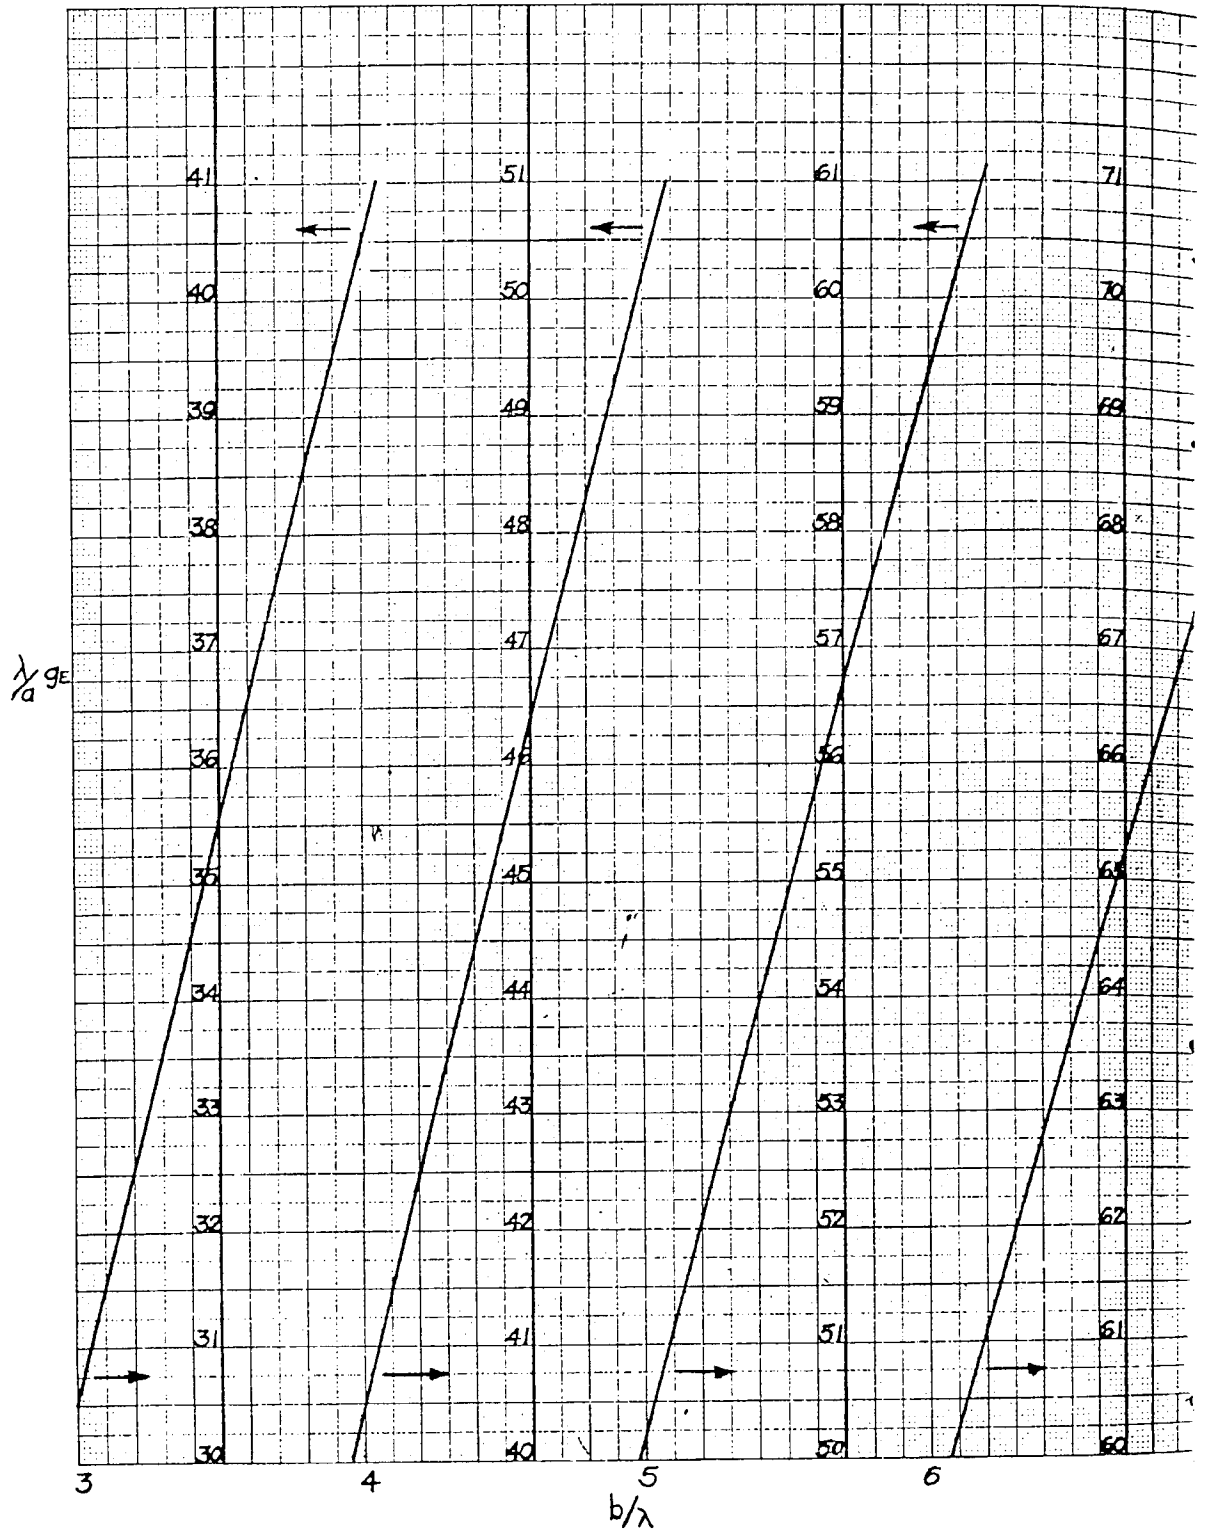


Fig. A-2 (a). Expanded E-plane theoretical gain curve

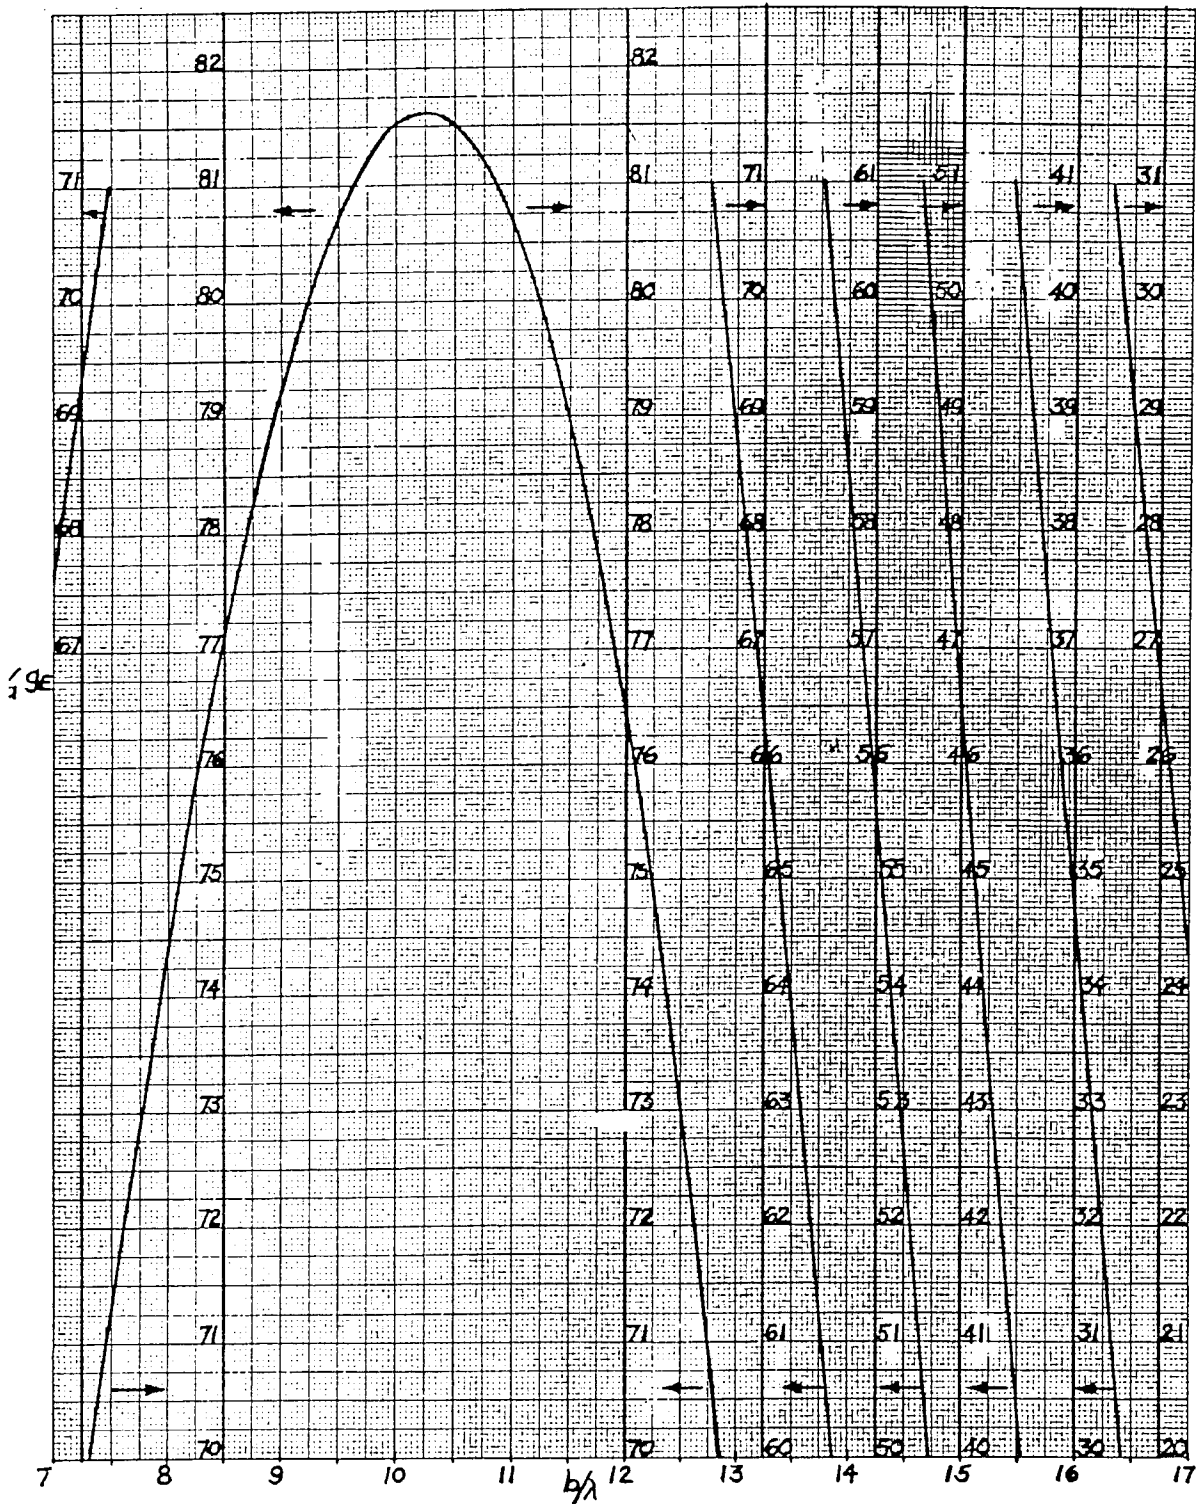


Fig. A-2 (b). Expanded E-plane theoretical gain curve

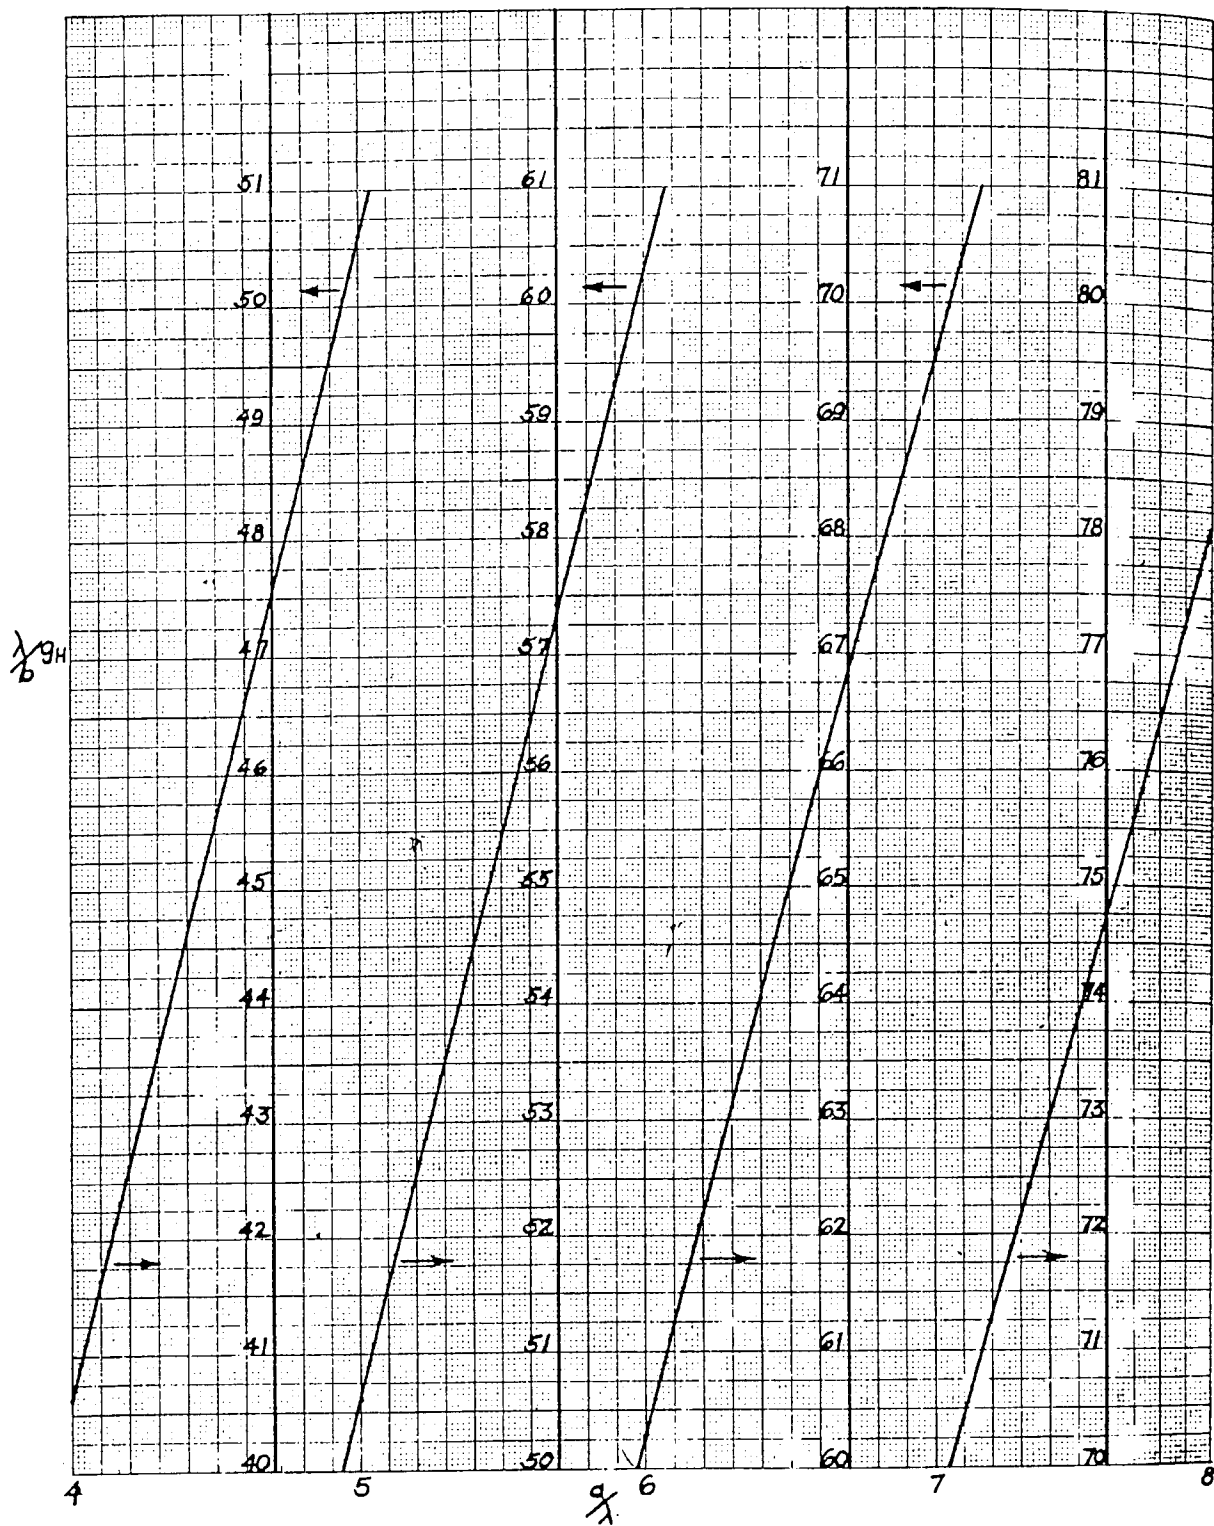


Fig. A-3 (a). Expanded H-plane theoretical gain curve


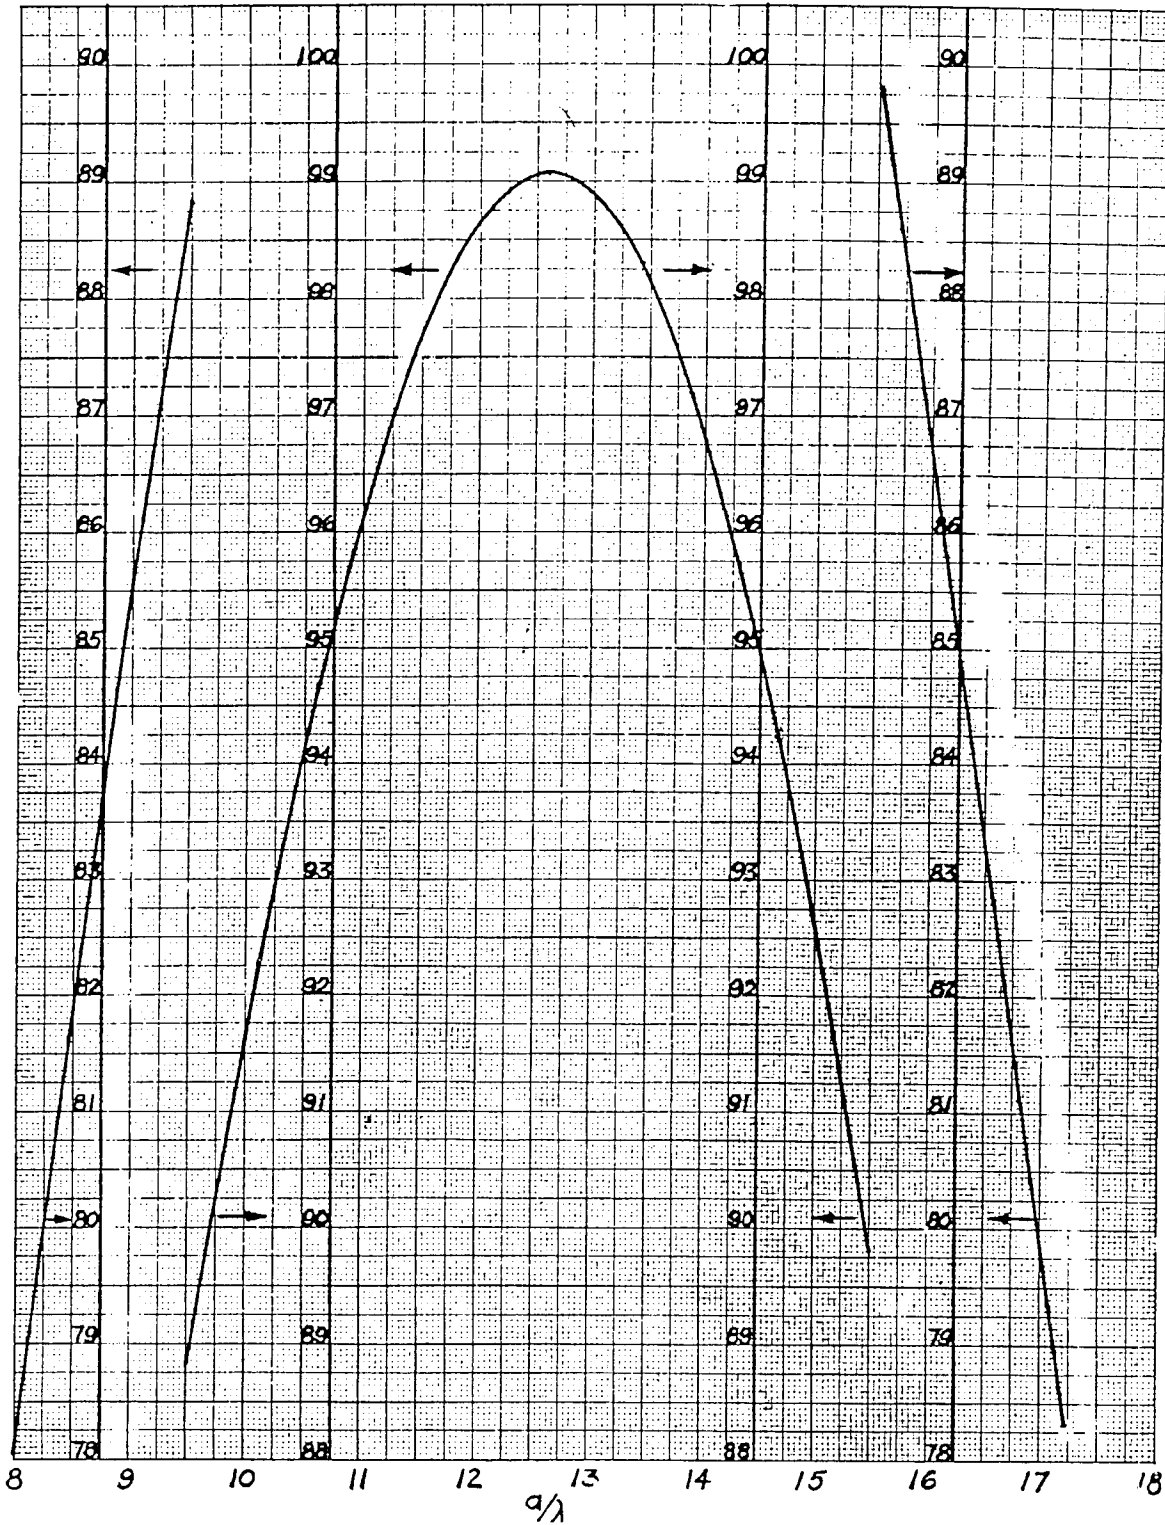



Fig. A-3 (b). Expanded H-plane theoretical gain curve

TABLE A-1
Data for Theoretical Gain Curves

(a) E-Plane ($l_E = 50\lambda$)											
b	$\frac{\lambda}{a} g_E$	b	$\frac{\lambda}{a} g_E$	b	$\frac{\lambda}{a} g_E$	b	$\frac{\lambda}{a} g_E$	b	$\frac{\lambda}{a} g_E$	b	$\frac{\lambda}{a} g_E$
2.0	20.362	4.6	46.397	7.2	69.123	9.8	81.301	12.4	73.784	15.0	46.499
2.1	21.381	4.7	47.362	7.3	69.847	9.9	81.426	12.5	73.041	15.1	45.268
2.2	22.395	4.8	48.326	7.4	70.555	10.0	81.518	12.6	72.265	15.2	44.040
2.3	23.410	4.9	49.283	7.5	71.248	10.1	81.581	12.7	71.459	15.3	42.813
2.4	24.425	5.0	50.233	7.6	71.923	10.2	81.611	12.8	70.621	15.4	41.593
2.5	25.440	5.1	51.181	7.7	72.586	10.3	81.609	12.9	69.753	15.5	40.379
2.6	26.456	5.2	52.123	7.8	73.219	10.4	81.575	13.0	68.856	15.6	39.174
2.7	27.472	5.3	53.057	7.9	73.841	10.5	81.510	13.1	67.931	15.7	37.982
2.8	28.481	5.4	53.985	8.0	74.441	10.6	81.408	13.2	66.980	15.8	36.801
2.9	29.490	5.5	54.908	8.1	75.025	10.7	81.277	13.3	66.001	15.9	35.636
3.0	30.503	5.6	55.821	8.2	75.585	10.8	81.110	13.4	64.997	16.0	34.488
3.1	31.511	5.7	56.728	8.3	76.127	10.9	80.909	13.5	63.969	16.1	33.359
3.2	32.518	5.8	57.626	8.4	76.645	11.0	80.676	13.6	62.917	16.2	32.250
3.3	33.527	5.9	58.517	8.5	77.142	11.1	80.405	13.7	61.844	16.3	31.164
3.4	34.530	6.0	59.401	8.6	77.616	11.2	80.104	13.8	60.748	16.4	30.104
3.5	35.534	6.1	60.272	8.7	78.065	11.3	79.765	13.9	59.635	16.5	29.069
3.6	36.534	6.2	61.134	8.8	78.492	11.4	79.393	14.0	58.501	16.6	28.063
3.7	37.531	6.3	61.987	8.9	78.892	11.5	78.987	14.1	57.351	16.7	27.086
3.8	38.530	6.4	62.828	9.0	79.269	11.6	78.545	14.2	56.188	16.8	26.142
3.9	39.524	6.5	63.659	9.1	79.619	11.7	78.068	14.3	55.008	16.9	25.232
4.0	40.515	6.6	64.477	9.2	79.944	11.8	77.559	14.4	53.816	17.0	24.355
4.1	41.504	6.7	65.285	9.3	80.240	11.9	77.014	14.5	52.614	17.1	23.515
4.2	42.490	6.8	66.080	9.4	80.510	12.0	76.435	14.6	51.402	17.2	22.713
4.3	43.472	6.9	66.862	9.5	80.752	12.1	75.822	14.7	50.183	17.3	21.951
4.4	44.450	7.0	67.630	9.6	80.964	12.2	75.176	14.8	48.959	17.4	21.228
4.5	45.425	7.1	68.385	9.7	81.146	12.3	74.497	14.9	47.731	17.5	20.548
(b) H-Plane ($l_H = 50\lambda$)											
a	$\frac{\lambda}{b} g_H$	a	$\frac{\lambda}{b} g_H$	a	$\frac{\lambda}{b} g_H$	a	$\frac{\lambda}{b} g_H$	a	$\frac{\lambda}{b} g_H$	a	$\frac{\lambda}{b} g_H$
2.0	20.370	4.6	46.635	7.2	71.291	9.8	90.633	12.4	99.019	15.0	92.591
2.1	21.387	4.7	47.628	7.3	72.164	9.9	91.195	12.5	99.052	15.1	92.066
2.2	22.402	4.8	48.619	7.4	73.031	10.0	91.740	12.6	99.062	15.2	91.528
2.3	23.422	4.9	49.609	7.5	73.889	10.1	92.270	12.7	99.051	15.3	90.972
2.4	24.439	5.0	50.595	7.6	74.739	10.2	92.781	12.8	99.012	15.4	90.400
2.5	25.452	5.1	51.578	7.7	75.580	10.3	93.274	12.9	98.953	15.5	89.822
2.6	26.471	5.2	52.559	7.8	76.413	10.4	93.751	13.0	98.871	15.6	89.214
2.7	27.488	5.3	53.536	7.9	77.236	10.5	94.208	13.1	98.763	15.7	88.601
2.8	28.501	5.4	54.512	8.0	78.049	10.6	94.646	13.2	98.638	15.8	87.976
2.9	29.518	5.5	55.475	8.1	78.854	10.7	95.067	13.3	98.486	15.9	87.337
3.0	30.532	5.6	56.449	8.2	79.644	10.8	95.470	13.4	98.309	16.0	86.688
3.1	31.545	5.7	57.418	8.3	80.427	10.9	95.848	13.5	98.114	16.1	86.026
3.2	32.560	5.8	58.377	8.4	81.196	11.0	96.207	13.6	97.894	16.2	85.355
3.3	33.573	5.9	59.334	8.5	81.956	11.1	96.547	13.7	97.654	16.3	84.677
3.4	34.579	6.0	60.286	8.6	82.703	11.2	96.869	13.8	97.387	16.4	83.990
3.5	35.595	6.1	61.232	8.7	83.440	11.3	97.168	13.9	97.101	16.5	83.319
3.6	36.605	6.2	62.176	8.8	84.164	11.4	97.446	14.0	96.793	16.6	82.594
3.7	37.612	6.3	63.115	8.9	84.875	11.5	97.702	14.1	96.464	16.7	81.888
3.8	38.622	6.4	64.046	9.0	85.567	11.6	97.938	14.2	96.113	16.8	81.179
3.9	39.629	6.5	64.975	9.1	86.250	11.7	98.149	14.3	95.740	16.9	80.461
4.0	40.633	6.6	65.896	9.2	86.923	11.8	98.342	14.4	95.348	17.0	79.742
4.1	41.637	6.7	66.810	9.3	87.579	11.9	98.510	14.5	94.936	17.1	79.023
4.2	42.645	6.8	67.720	9.4	88.221	12.0	98.658	14.6	94.504	17.2	78.301
4.3	43.639	6.9	68.623	9.5	88.844	12.1	98.783	14.7	94.054	17.3	77.578
4.4	44.641	7.0	69.518	9.6	89.460	12.2	98.882	14.8	93.586	17.4	76.854
4.5	45.639	7.1	70.407	9.7	90.053	12.3	98.965	14.9	93.095	17.5	76.134

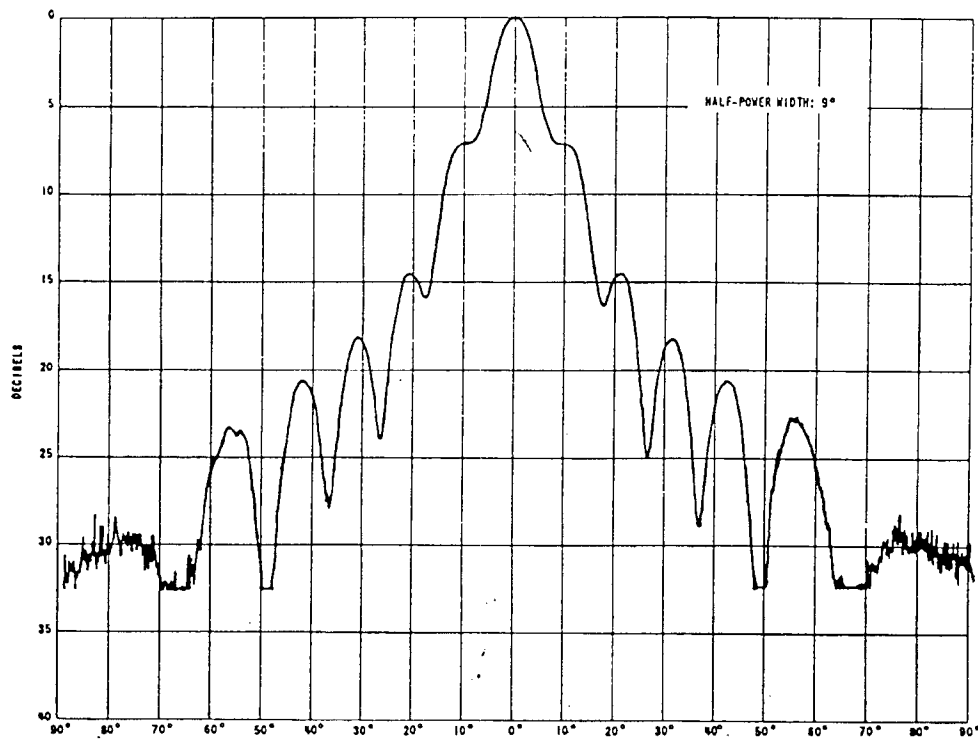


(a) 1.87 cm, E-plane

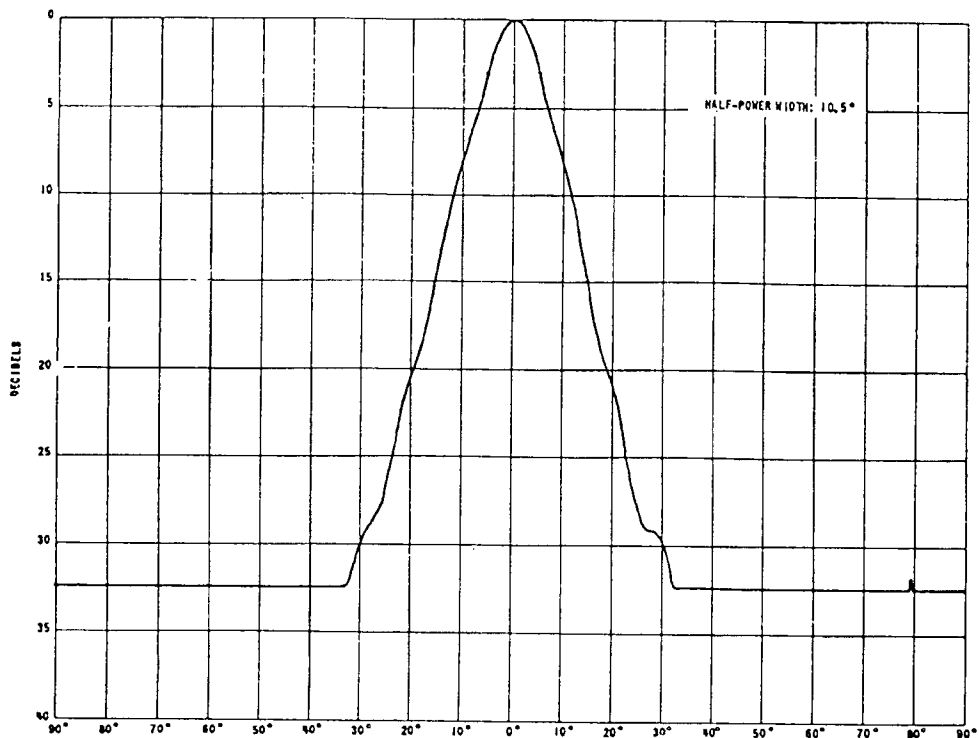


(b) 1.87 cm, H-plane

Fig. A-4. E- and H-plane field patterns

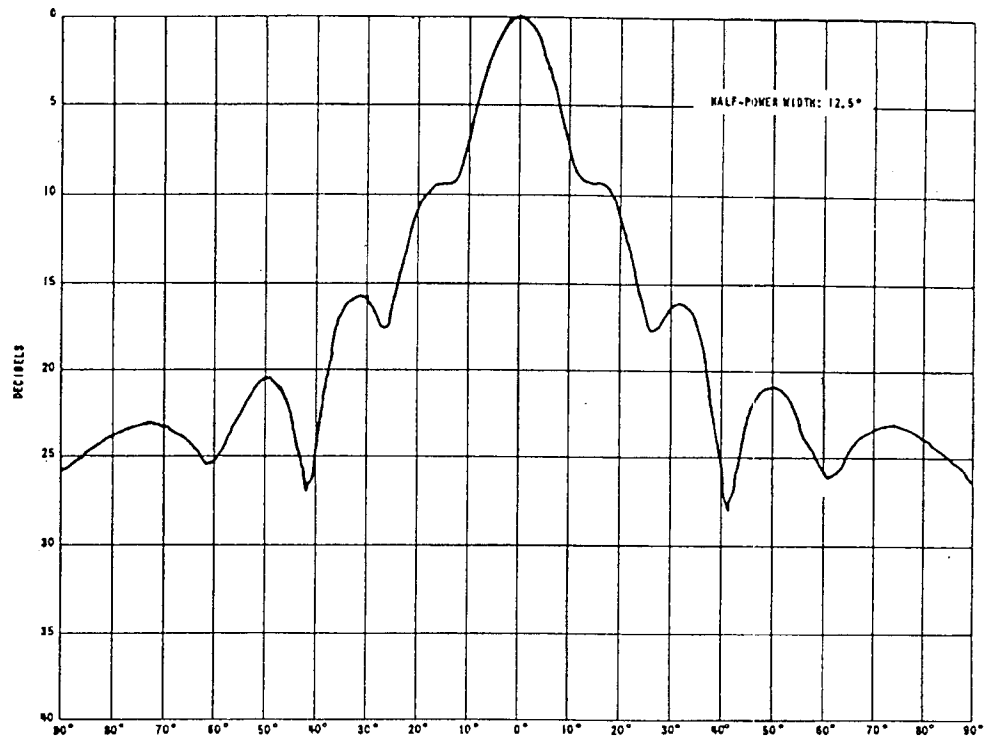


(c) 3.20 cm, E-plane

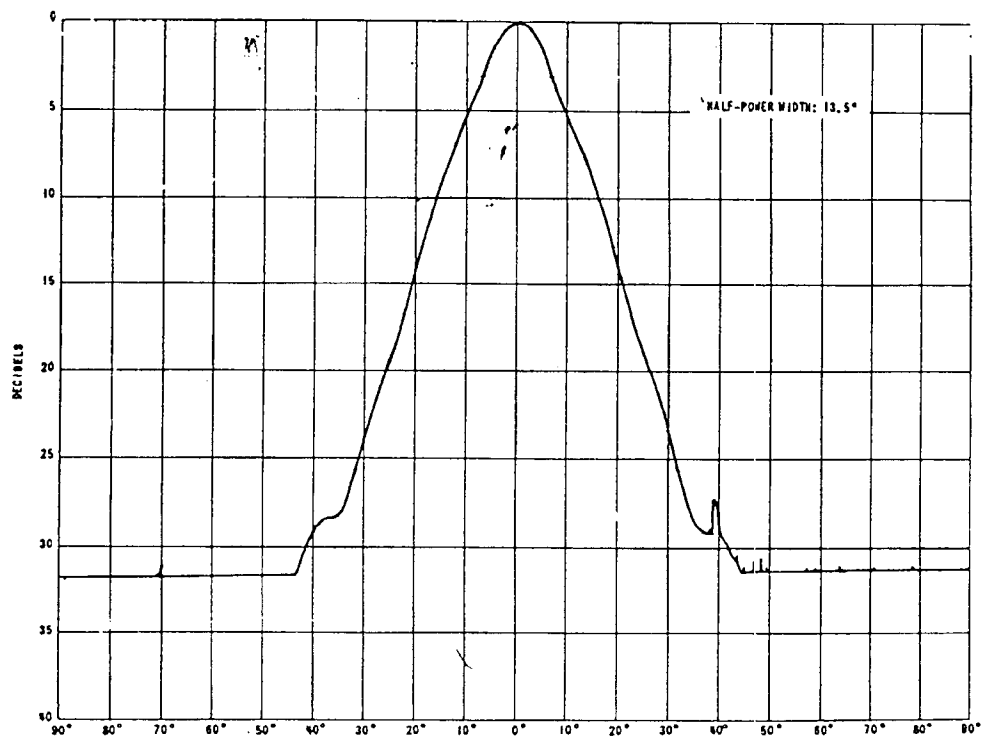


(d) 3.20 cm, H-plane

Fig. A-4. E- and H-plane field patterns

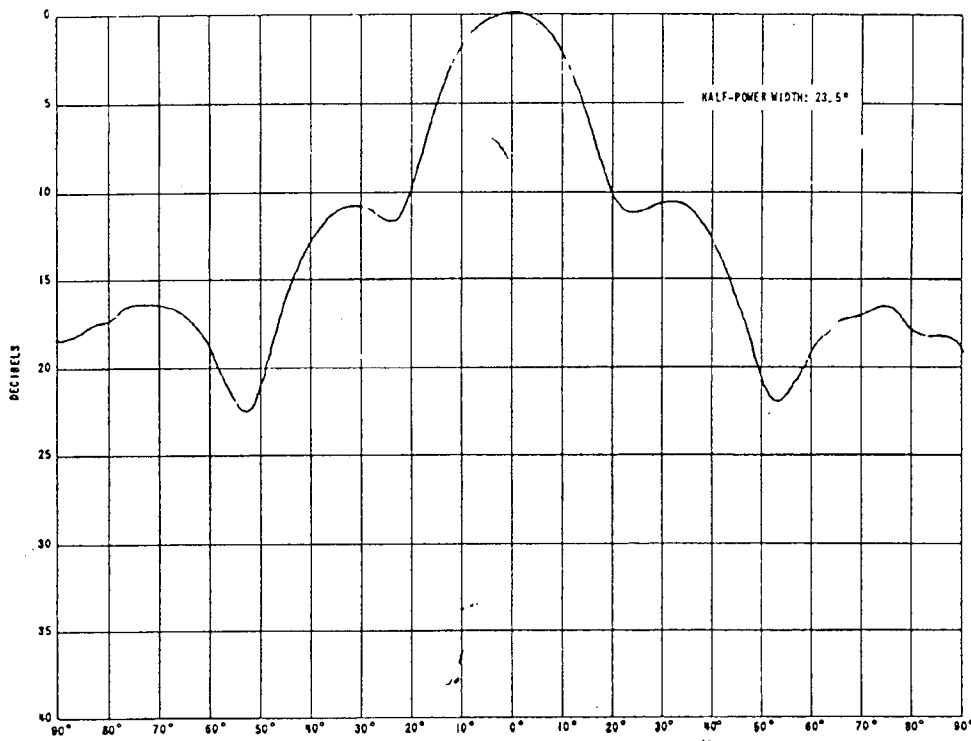

(e) 6.67 cm, E-plane

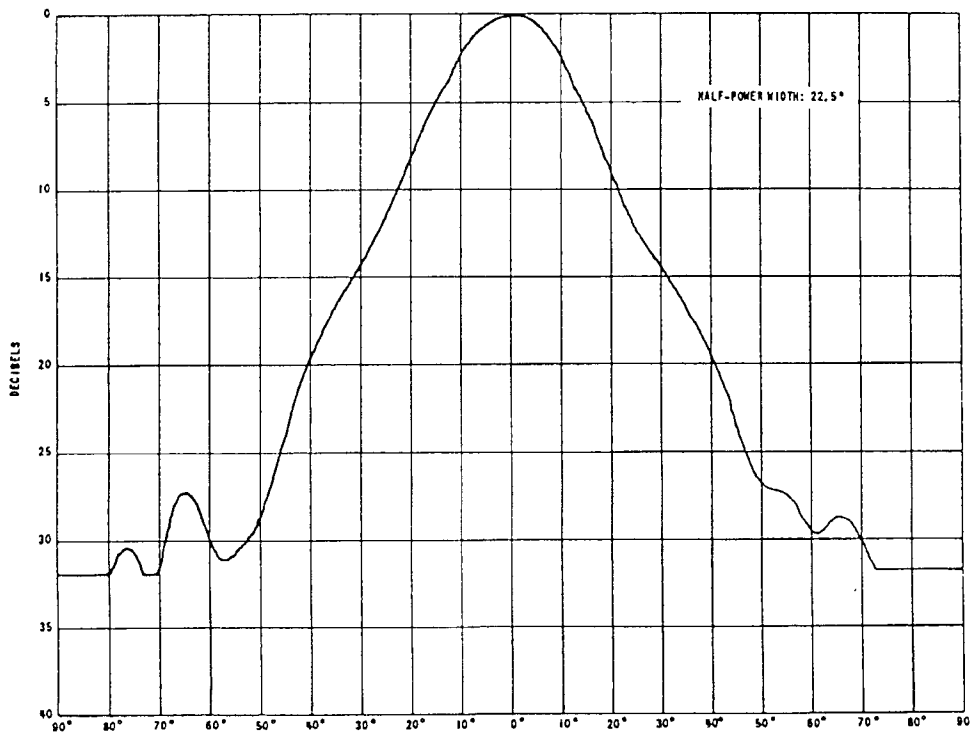

(f) 6.67 cm, H-plane

Fig. A-4. E- and H-plane field patterns

TABLE A-2
Summary of Gain-Standard Horn Data

Band	Frequency Range	Dimensions (I.D.) (in.)	Design-Point Frequency	Gain at Design Point (db)
8 mm	0.77 - 1.13 cm	a = 2.720 b = 2.231	0.85 cm	24.7
	26,550 - 38,960 Mc	$l_H = 6.513$ $l_E = 6.197$	35,290 Mc	
1.25 cm	1.13 - 1.66 cm	a = 4.000 b = 3.281	1.25 cm	24.7
	18,070 - 26,550 Mc	$l_H = 9.706$ $l_E = 9.113$	24,000 Mc	
1.8 cm	1.66 - 2.42 cm	a = 5.984 b = 4.908	1.87 cm	24.7
	12,400 - 18,070 Mc	$l_H = 14.333$ $l_E = 13.633$	16,040 Mc	
3.2 cm	2.42 - 3.70 cm	a = 7.654 b = 5.669	3.20 cm	22.1
	8100 - 12,400 Mc	$l_H = 13.484$ $l_E = 12.598$	9375 Mc	
4.75 cm	3.60 - 5.20 cm	a = 11.360 b = 8.415	4.75 cm	22.1
	5770 - 8330 Mc	$l_H = 20.014$ $l_E = 18.700$	6315 Mc	
3.95 cm	3.00 - 4.30 cm	a = 5.041 b = 3.733	3.95 cm	18.0
	6980 - 10,000 Mc	$l_H = 7.447$ $l_E = 6.555$	7595 Mc	
6 cm	5.10 - 7.60 cm	a = 8.507 b = 6.300	6.67 cm	18.0
	3950 - 5880 Mc	$l_H = 12.462$ $l_E = 11.062$	4500 Mc	
10 cm	7.60 - 11.5 cm	a = 12.760 b = 9.450	10.00 cm	18.0
	2600 - 3950 Mc	$l_H = 18.682$ $l_E = 16.593$	3000 Mc	
15 cm	11.5 - 17.6 cm	a = 14.508 b = 10.747	15.22 cm	15.5
	1700 - 2600 Mc	$l_H = 16.508$ $l_E = 14.107$	1970 Mc	
23 cm	17.6 - 26.5 cm	a = 21.931 b = 16.245	23.00 cm	15.5
	1130 - 1700 Mc	$l_H = 24.955$ $l_E = 21.325$	1300 Mc	
30 cm	26.0 - 31.5 cm	a = 21.931 b = 16.245	30.00 cm	13.7
	950 - 1150 Mc	$l_H = 28.730$ $l_E = 24.000$	1000 Mc	

Horns in brackets are scaled versions of each other, except for the l_H dimensions, which are chosen to make a simple butt-joint at the waveguide

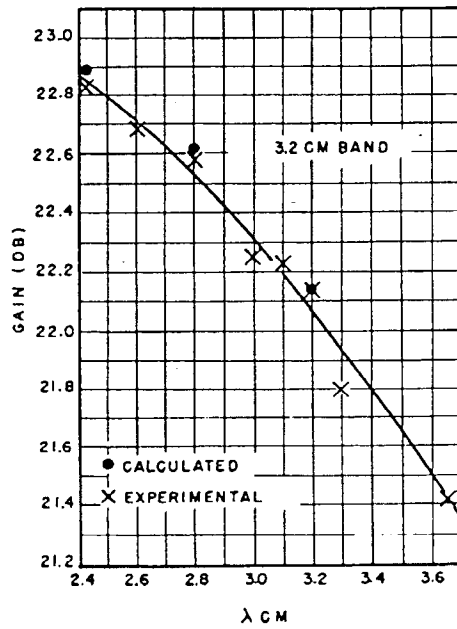
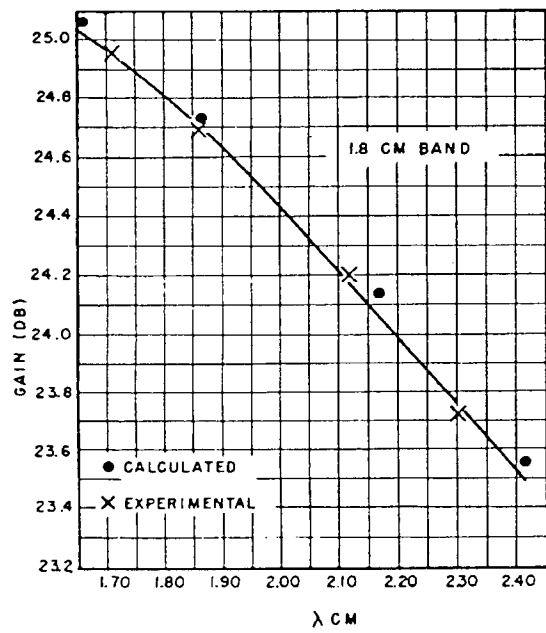
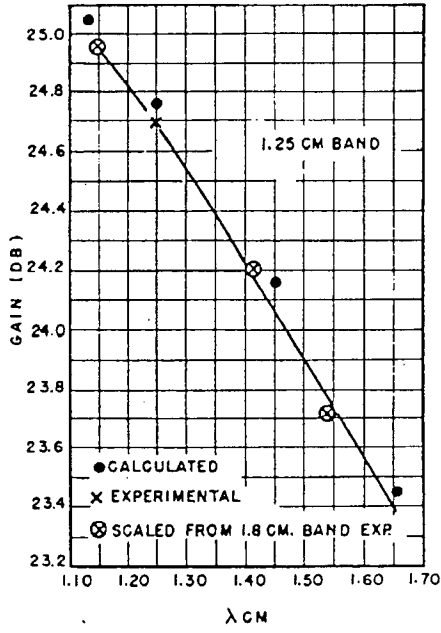
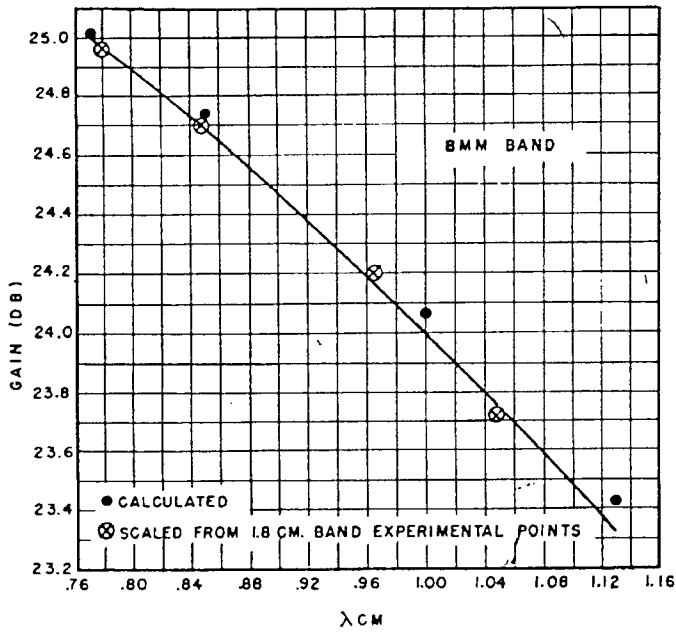


Fig. A-5(a). Gain curves







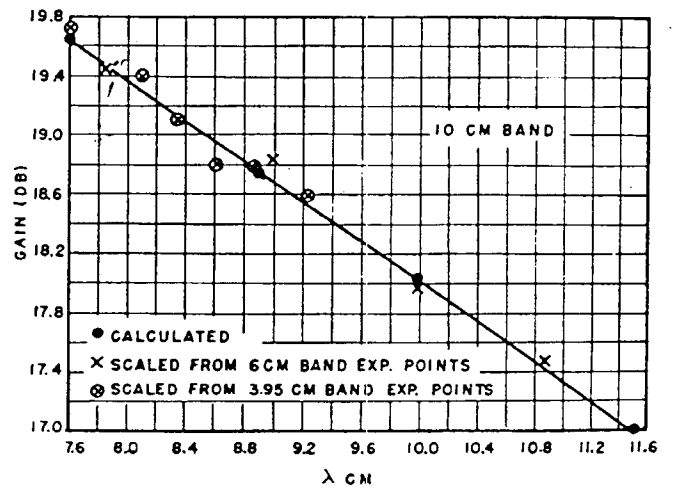


Fig. A-5 (b). Gain curves

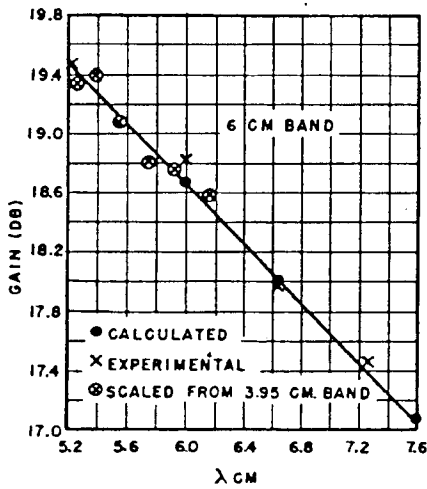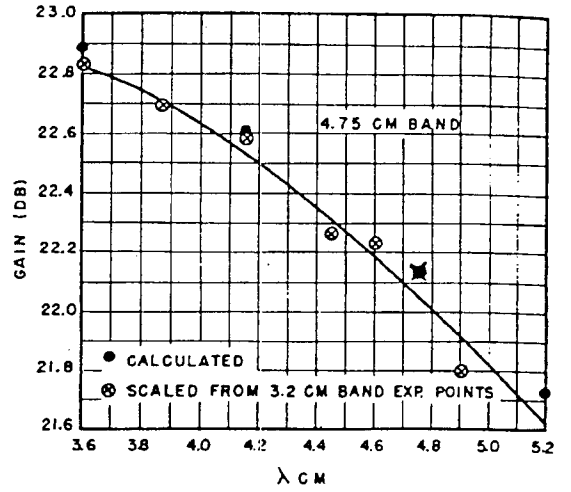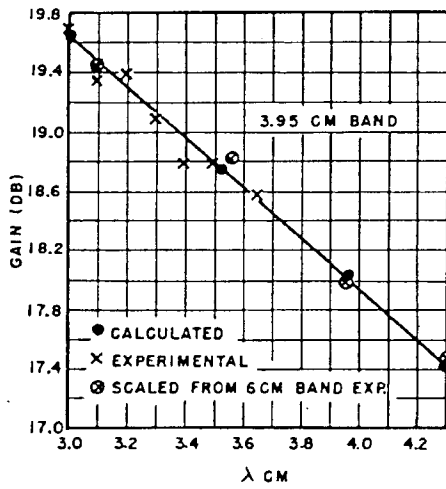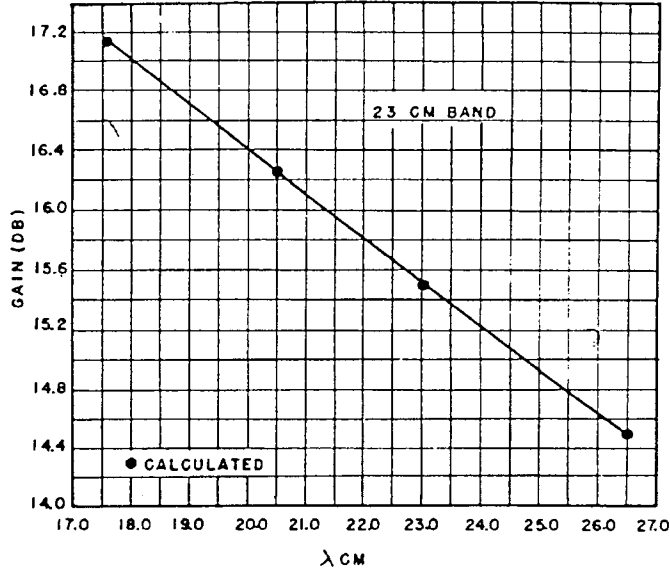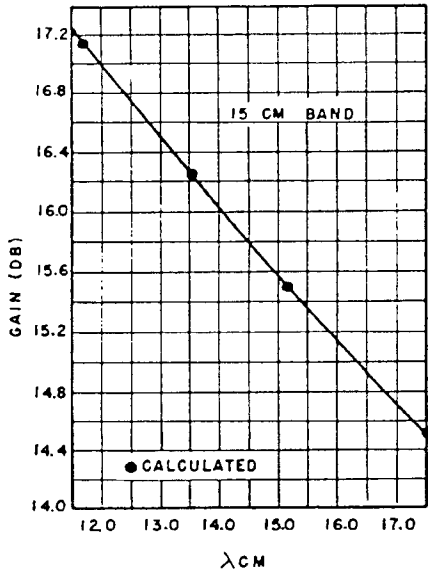

CONVERSION CHART

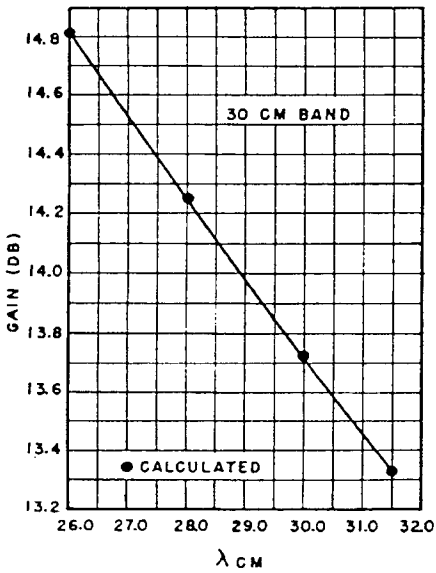

f (Mc)	λ (cm)	f (Mc)	λ (cm)	f (Mc)	λ (cm)	f (Mc)	λ (cm)	f (Mc)	λ (cm)
1000	30.00	2800	10.71	4600	6.52	6400	4.69	8200	3.66
1050	28.57	2850	10.53	4650	6.45	6450	4.65	8250	3.64
1100	27.27	2900	10.34	4700	6.38	6500	4.62	8300	3.61
1150	26.09	2950	10.17	4750	6.32	6550	4.58	8350	3.59
1200	25.00	3000	10.00	4800	6.25	6600	4.55	8400	3.57
1250	24.00	3050	9.84	4850	6.19	6650	4.51	8450	3.55
1300	23.08	3100	9.68	4900	6.12	6700	4.48	8500	3.53
1350	22.22	3150	9.52	4950	6.06	6750	4.44	8550	3.51
1400	21.43	3200	9.38	5000	6.00	6800	4.41	8600	3.49
1450	20.69	3250	9.23	5050	5.94	6850	4.38	8650	3.47
1500	20.00	3300	9.09	5100	5.88	6900	4.35	8700	3.45
1550	19.35	3350	8.96	5150	5.83	6950	4.32	8750	3.43
1600	18.75	3400	8.82	5200	5.77	7000	4.29	8800	3.41
1650	18.18	3450	8.70	5250	5.71	7050	4.26	8850	3.39
1700	17.65	3500	8.57	5300	5.66	7100	4.23	8900	3.37
1750	17.14	3550	8.45	5350	5.61	7150	4.20	8950	3.35
1800	16.67	3600	8.33	5400	5.56	7200	4.17	9000	3.33
1850	16.22	3650	8.22	5450	5.50	7250	4.14	9050	3.31
1900	15.79	3700	8.11	5500	5.45	7300	4.11	9100	3.30
1950	15.38	3750	8.00	5550	5.41	7350	4.08	9150	3.28
2000	15.00	3800	7.89	5600	5.36	7400	4.05	9200	3.26
2050	14.63	3850	7.79	5650	5.31	7450	4.03	9250	3.24
2100	14.29	3900	7.69	5700	5.26	7500	4.00	9300	3.23
2150	13.95	3950	7.59	5750	5.22	7550	3.97	9350	3.21
2200	13.64	4000	7.50	5800	5.17	7600	3.95	9400	3.19
2250	13.33	4050	7.41	5850	5.13	7650	3.92	9450	3.17
2300	13.04	4100	7.32	5900	5.08	7700	3.90	9500	3.16
2350	12.77	4150	7.23	5950	5.04	7750	3.87	9550	3.14
2400	12.50	4200	7.14	6000	5.00	7800	3.85	9600	3.13
2450	12.24	4250	7.06	6050	4.96	7850	3.82	9650	3.11
2500	12.00	4300	6.98	6100	4.92	7900	3.80	9700	3.09
2550	11.76	4350	6.90	6150	4.88	7950	3.77	9750	3.08
2600	11.54	4400	6.82	6200	4.84	8000	3.75	9800	3.06
2650	11.32	4450	6.74	6250	4.80	8050	3.73	9850	3.05
2700	11.11	4500	6.67	6300	4.76	8100	3.70	9900	3.03
2750	10.91	4550	6.59	6350	4.72	8150	3.68	9950	3.02
								10000	3.00

Fig. A-5(c). Gain curves and conversion chart


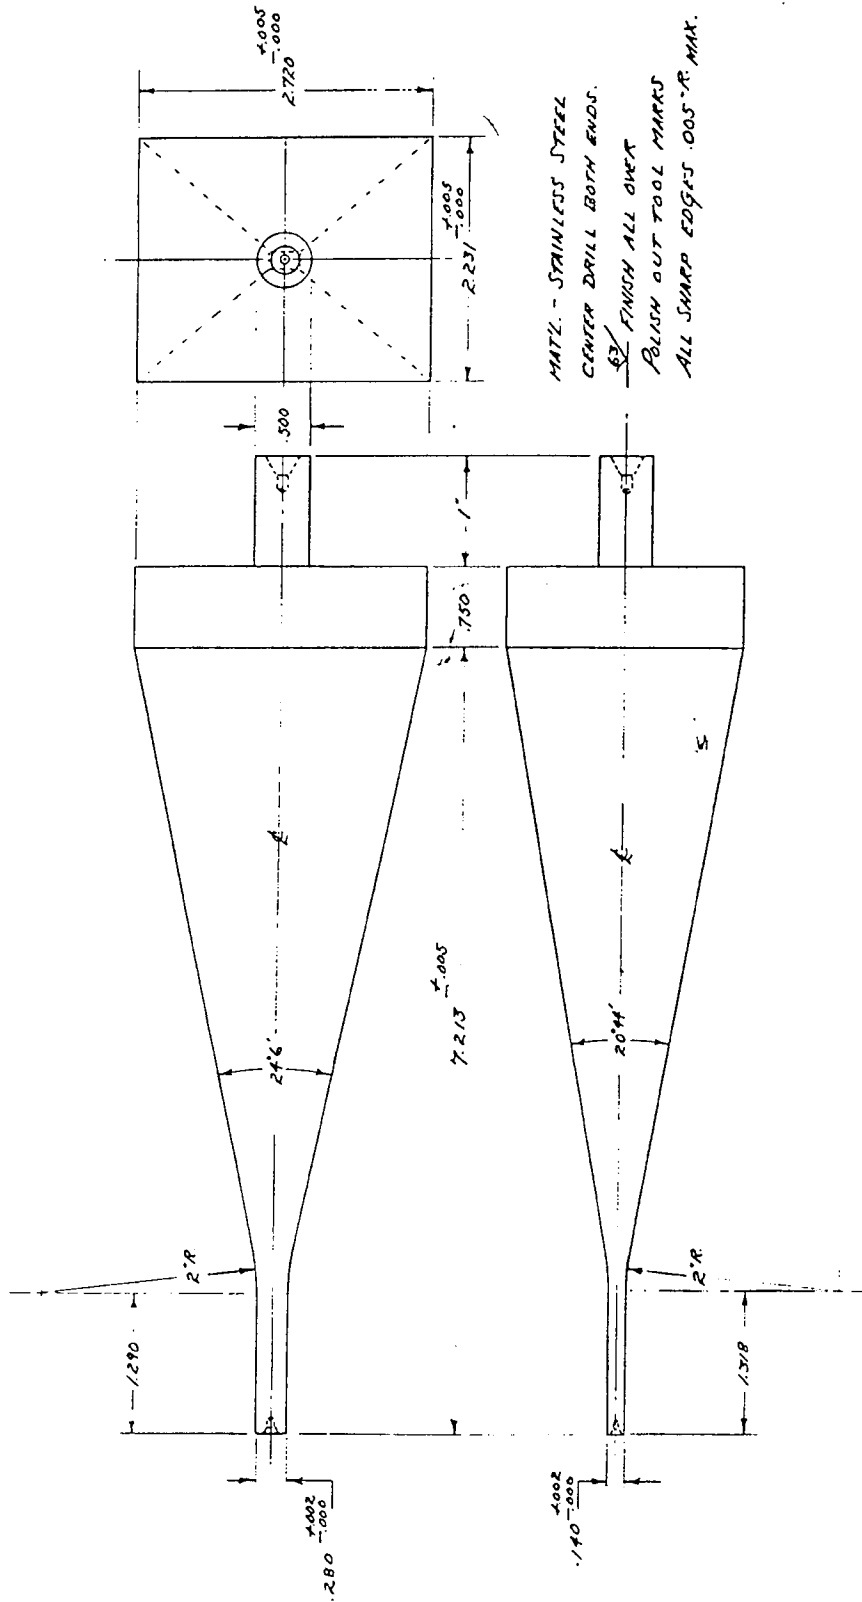


Fig. A-7. Mandril for electroforming 8-mm-band gain-standard horn

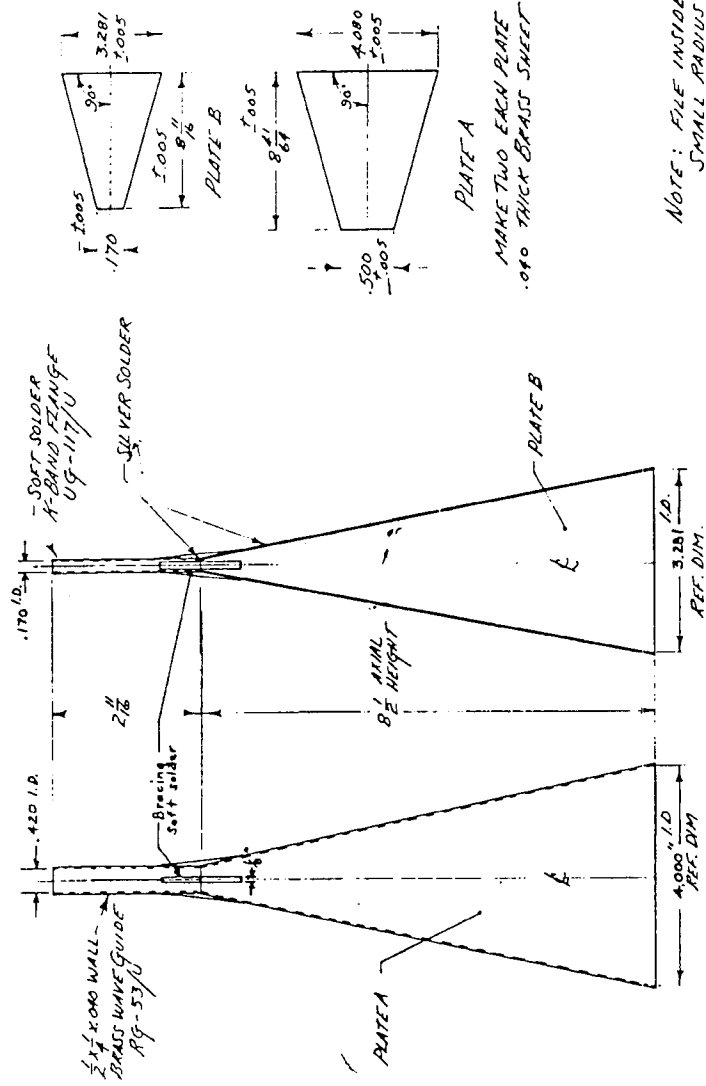

NOTE: FILE INSIDE TO A SMOOTH
SMALL RADIUS AT JOINT WHERE
HORN MEETS WAVE GUIDE

Fig. A-8. 1.25-cm-band gain-standard horn (1.13-1.66 cm)

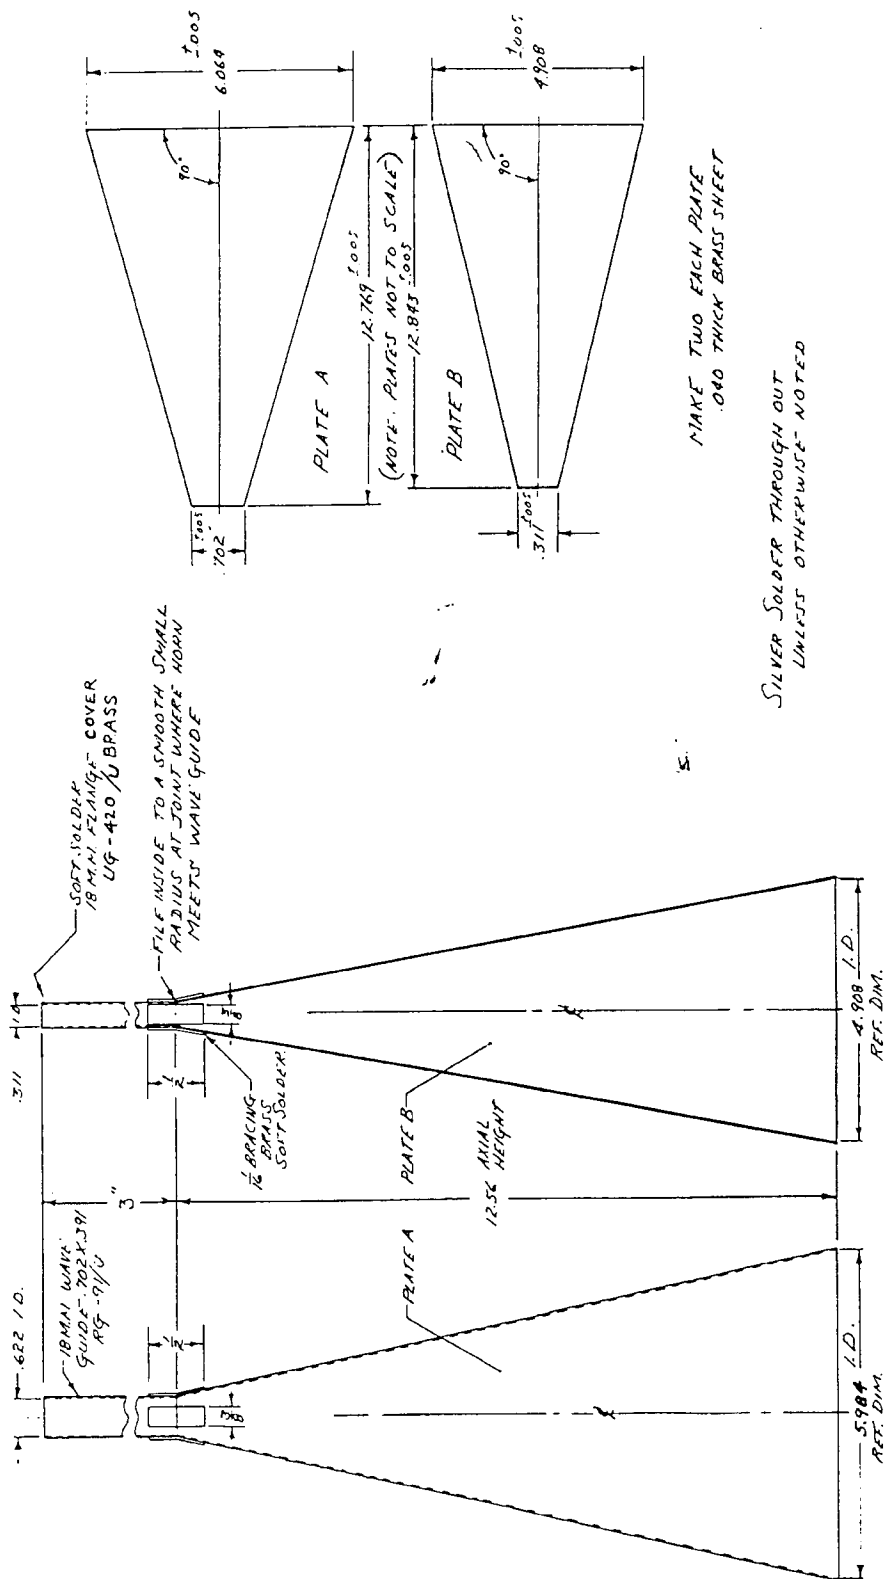


Fig. A-9. 18-mm-band gain-standard horn (1.66-2.42 cm)

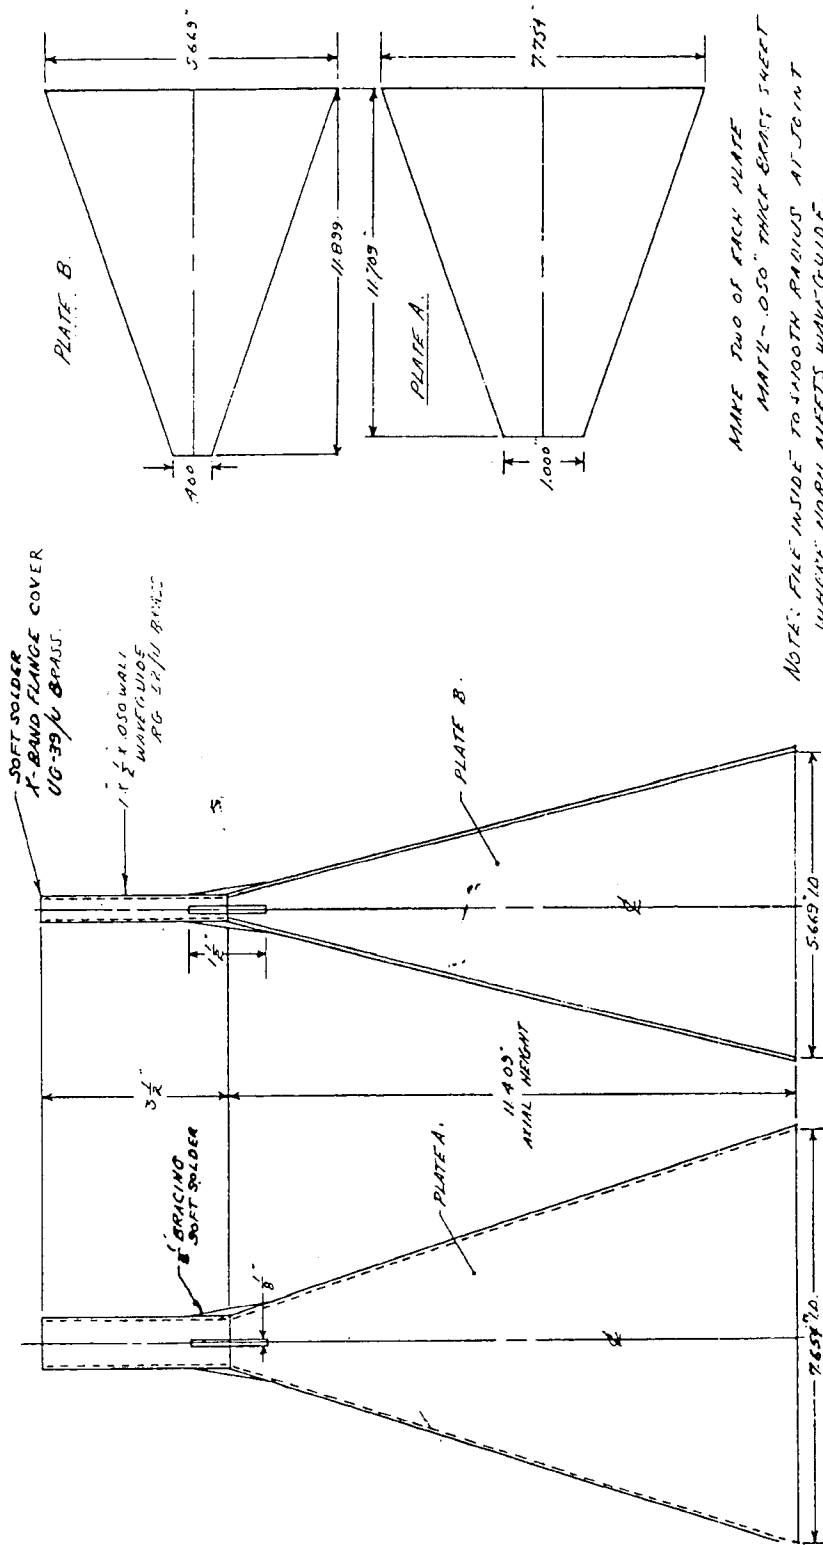


Fig. A-10. 3.2-cm-band gain-standard horn (2.42-3.70 cm)

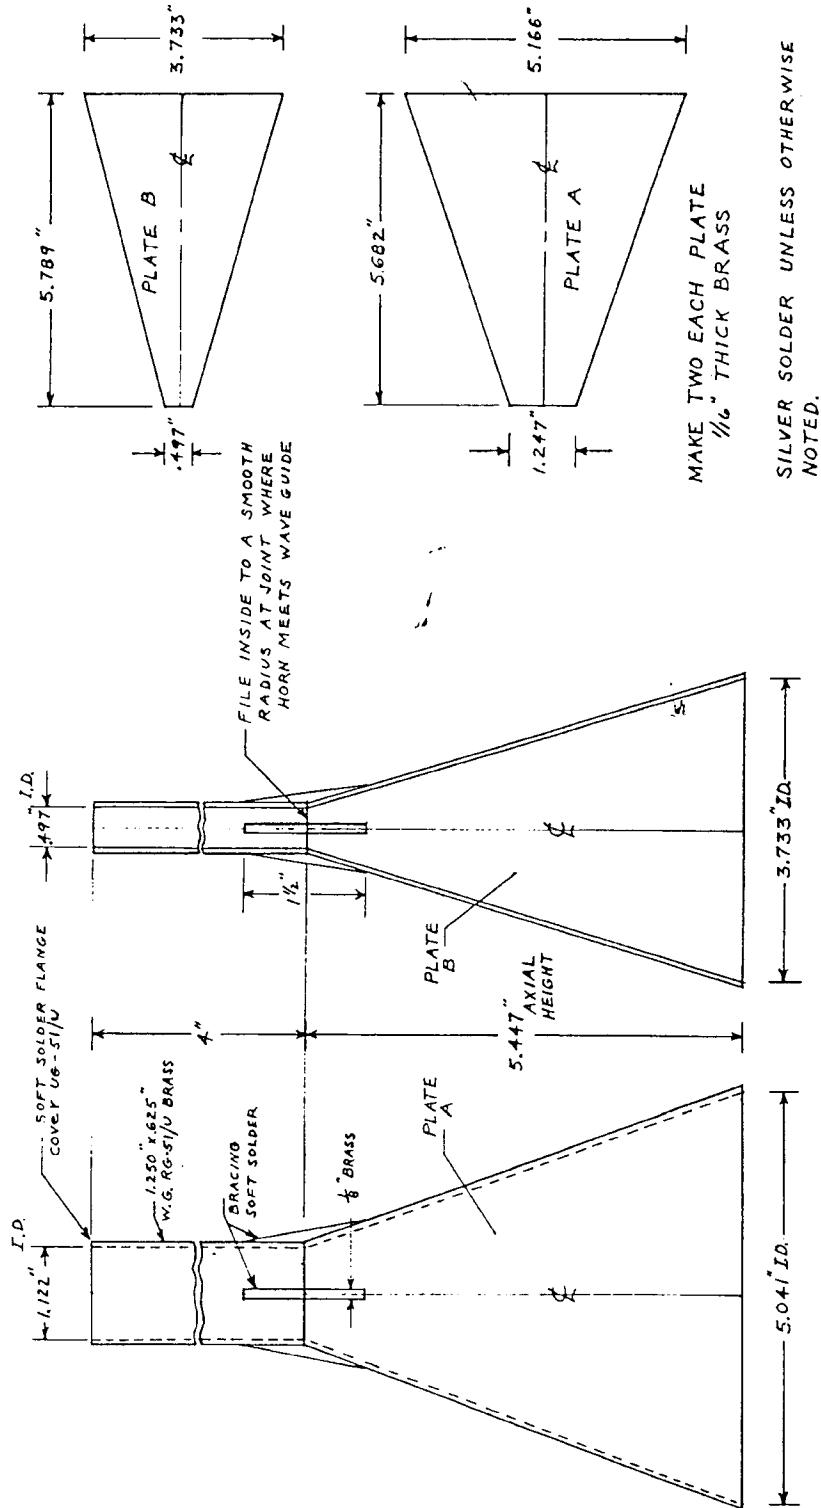


Fig. A-11. 3.95-cm-band gain-standard horn (3.0-4.30 cm)

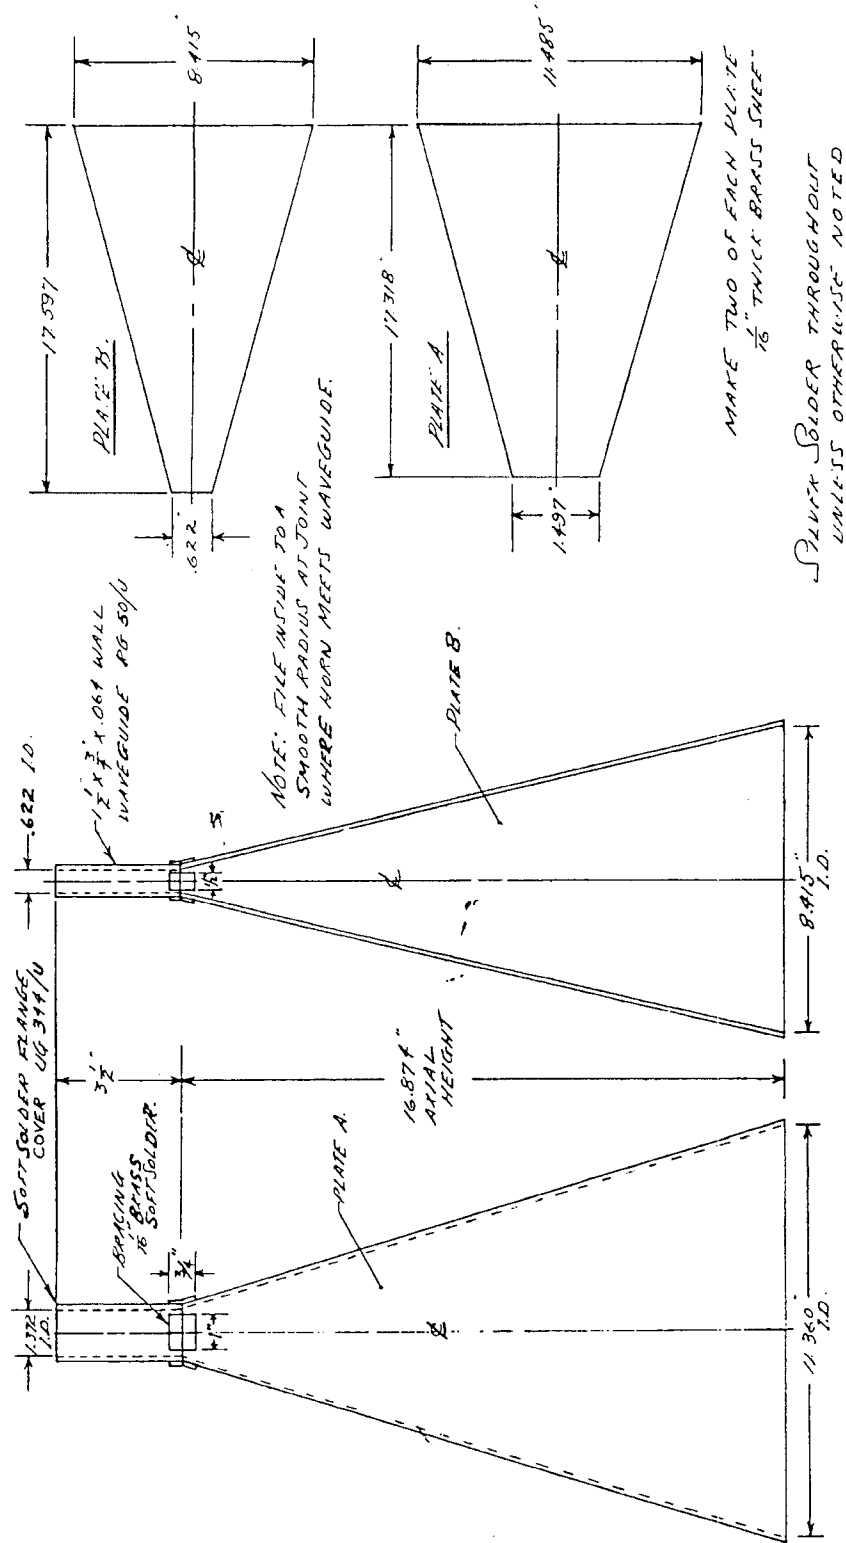


Fig. A-12. 4.75-cm-band gain-standard horn (3.60-5.20 cm)

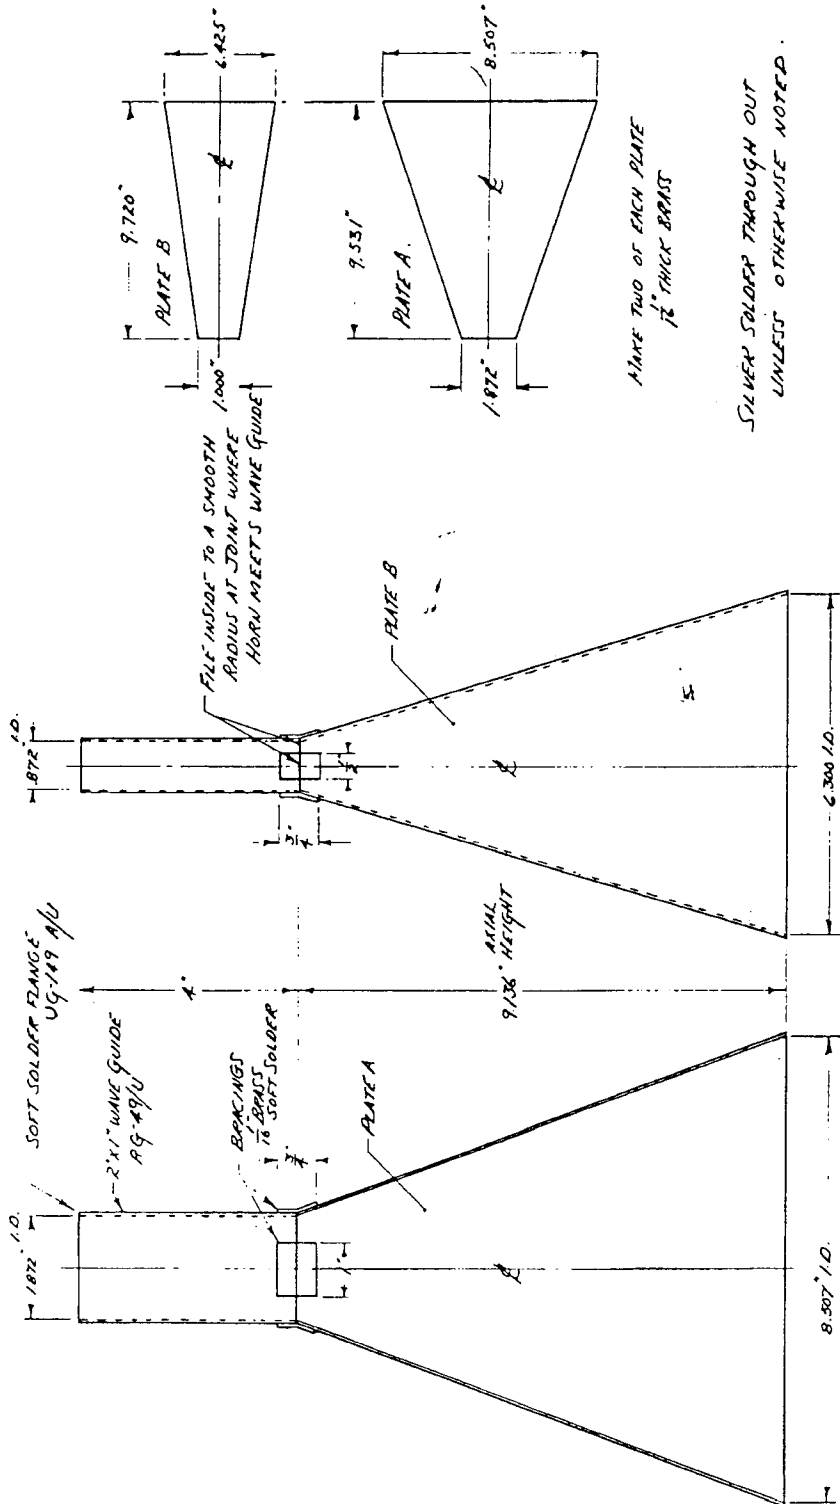


Fig. A-13. 6-cm-band gain-standard horn (5.10-7.60 cm)



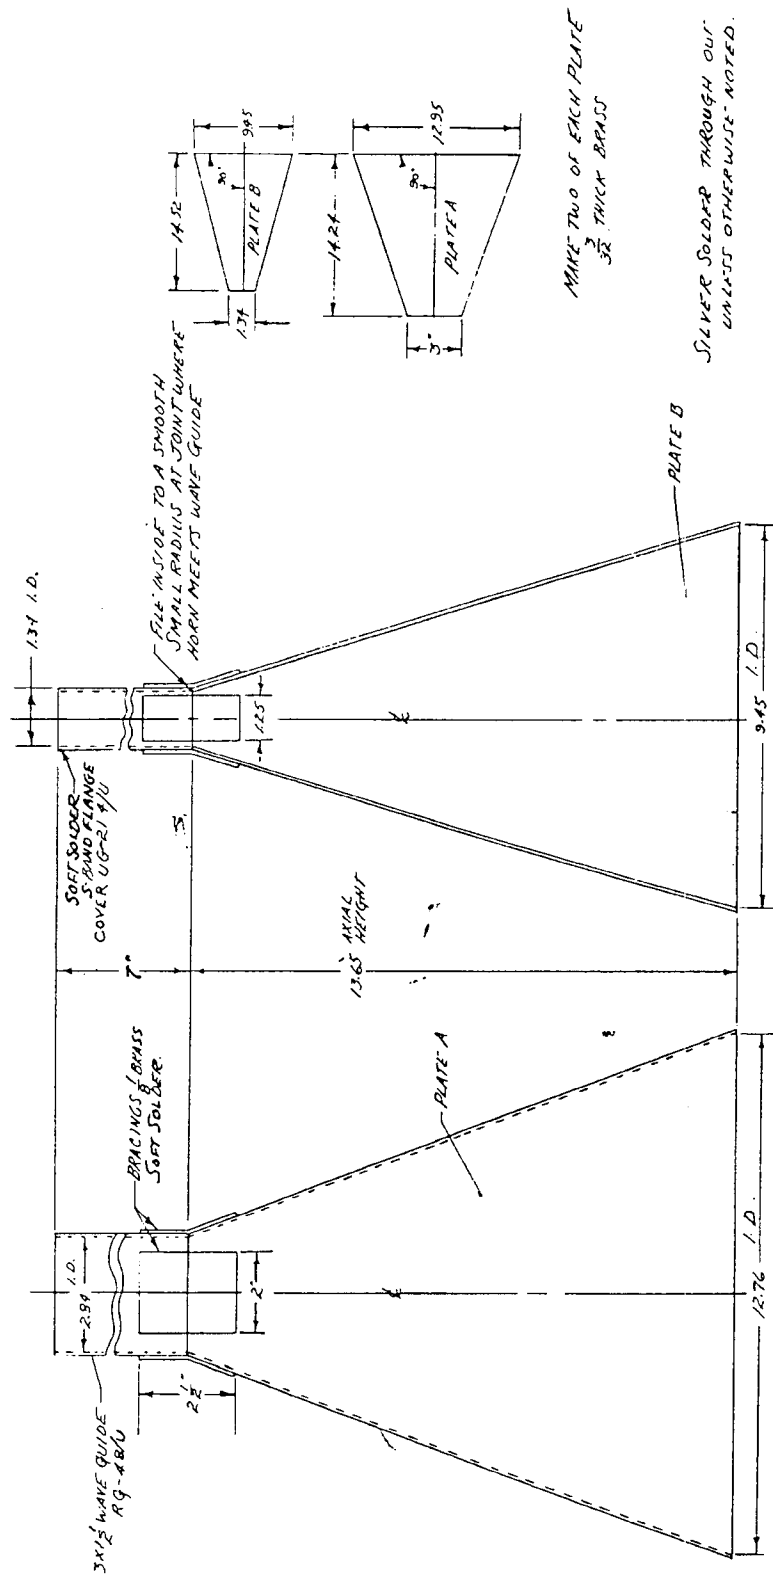


Fig. A-14. 10-cm-band gain-standard horn (7.60-11.5 cm)

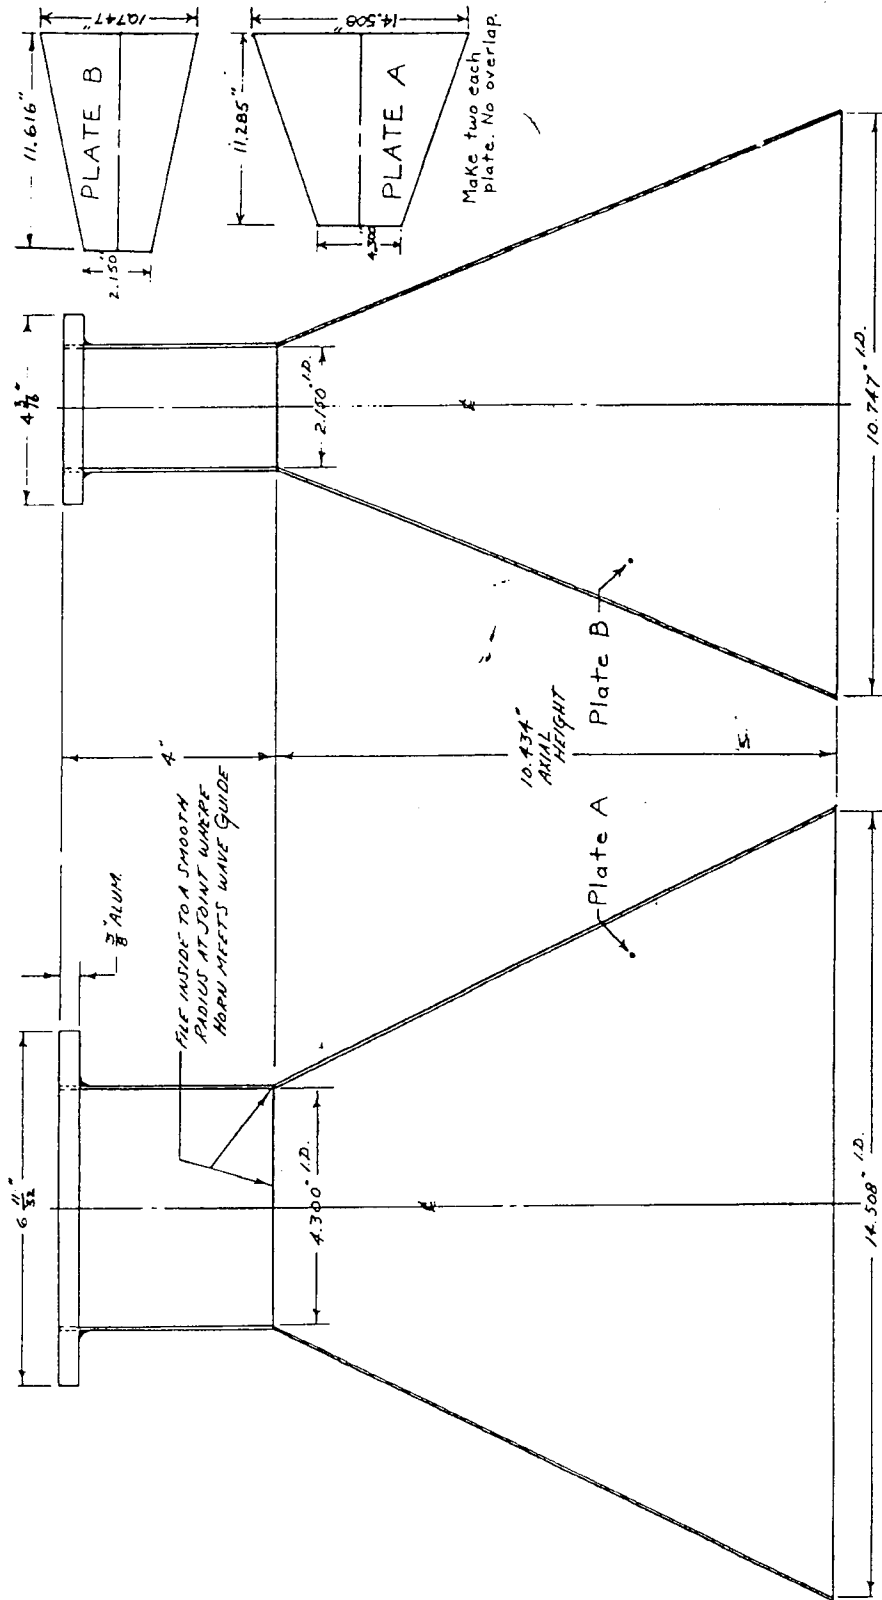


MATERIAL - $\frac{3}{32}$ ALUM. (HELLARC)
TOLERANCE $\pm .010$ "


Fig. A-15. 15-cm band gain-standard horn (11.5-17.6 cm)

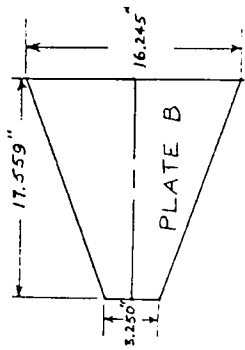

MAT'L - $\frac{3}{8}$ " ALUM
(HELLIARC)
TOLERANCES $\pm .015$ "

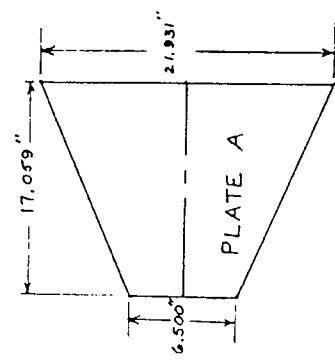


Make two each plate
Plates do not overlap

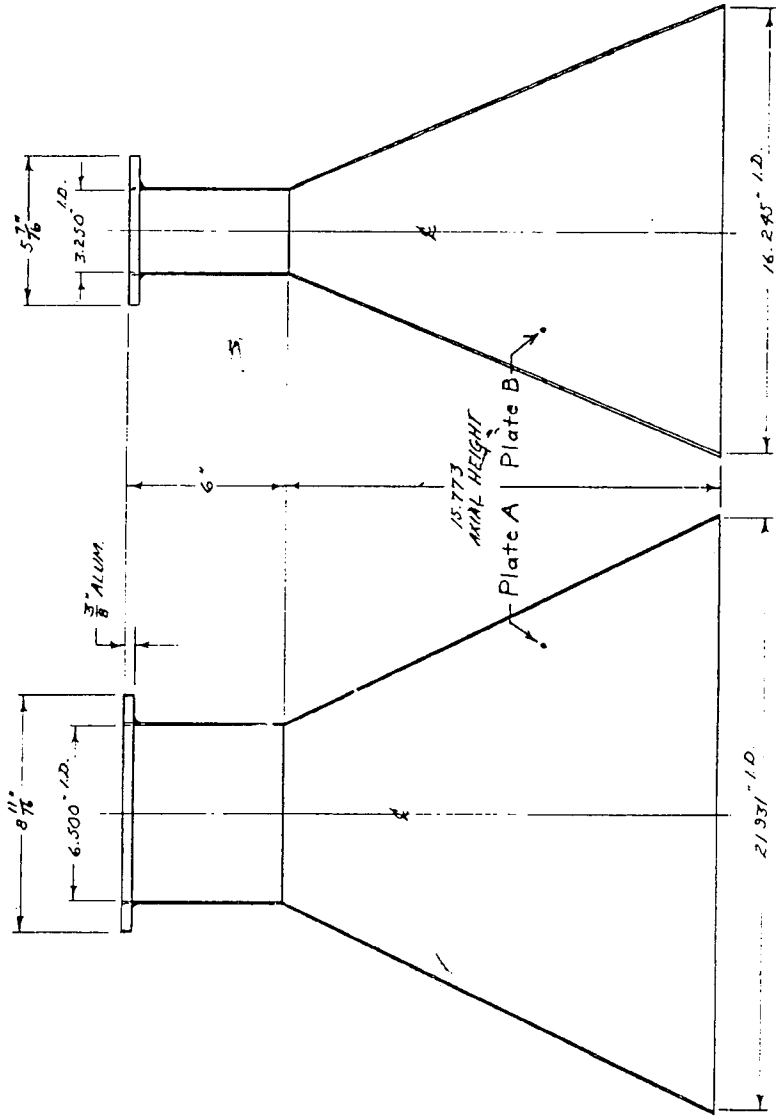


NOTE: FILE INSIDE TO A SMOOTH RADIUS
AT JOINT WHERE HORN MEETS. NAME GUIDE


Fig. A-16. 23-cm-band gain-standard horn (17.6-26.5 cm)



MATERIAL - $\frac{1}{8}$ " ALUM.
(H421MPC)
TOLERANCE $\pm .015$ "



Make two each plate.
Plates do not overlap.

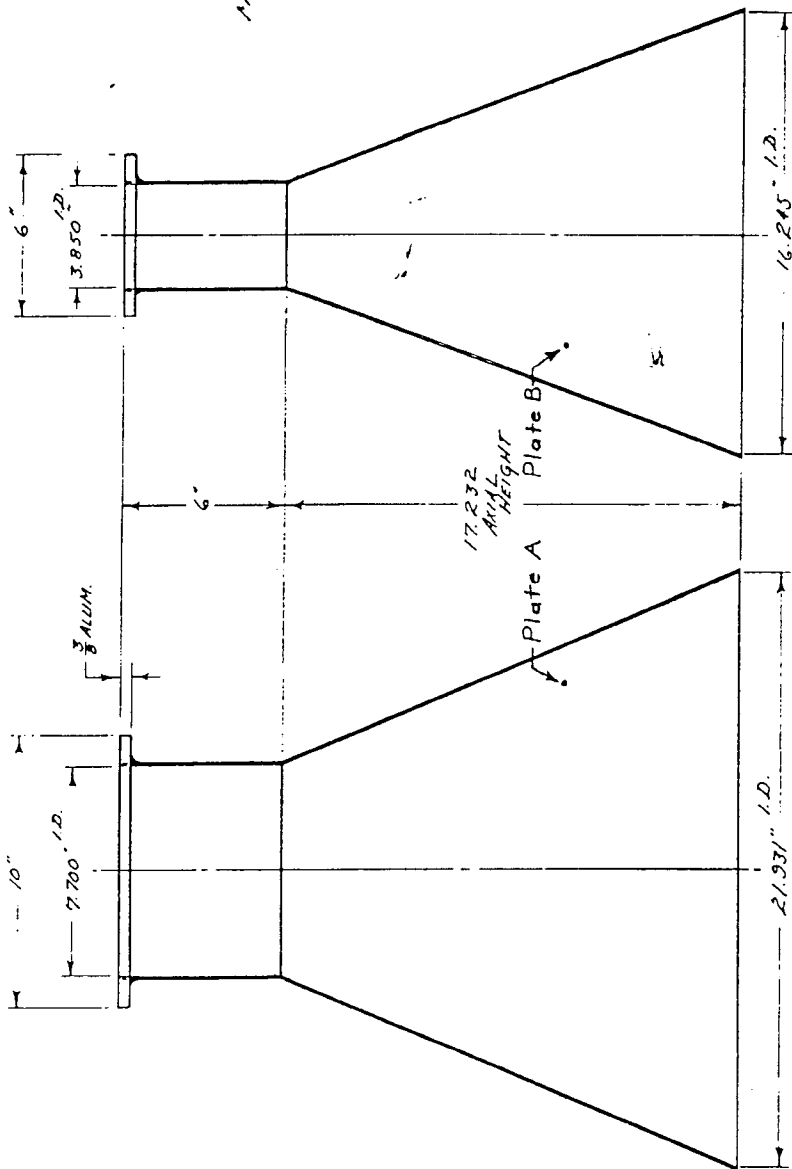

NOTE: FILE INSIDE TO A SMOOTH RADIUS
AT JOINT WHERE HORN MEETS WAVE GUIDE

Fig. A-17. 30-cm-band gain-standard horn (26.0-31.5 cm)