

Double Balanced Mixer

Model MM9xxG-21

Ultra-Broadband

RF 2.0 to 18.0 GHz

Electrical Specifications:⁽¹⁾

Parameter	Conditions			Specifications		
	RF (GHz)	LO (GHz)	IF (MHz)	Min	Typical	Max
SSB Conversion loss: ^{(2) (3)}	2.0-18.0	2.0-18.0	DC-150		6.5 dB	8.5 dB
	2.0-18.0	2.0-18.0	DC-300		7.0 dB	9.0 dB
	2.0-18.0	2.0-18.0	DC-500		8.0 dB	10.5 dB
	2.0-18.0	2.0-18.0	DC-600		8.5 dB	11.0 dB
Isolation		2.0-18.0		20 dB	27 dB	
		2.0-18.0		17 dB	22 dB	
	2.0-18.0				22 dB	
Input 1 dB Compression Point:	2.0-18.0	2.0-18.0	DC-600		+2 dBm +3 dBm	MM93 MM94
Input Third Order Intercept Point:	2.0-18.0	2.0-18.0	DC-600		+10 dBm +13 dBm	MM93 MM94
LO Power: ⁽⁴⁾	2.0-18.0	2.0-18.0	DC-600		+7 dBm +10 dBm	MM93 MM94

Model MM9xxG-21









LO Power
3 = +7 dBm
4 = +10 dBm

Drop-In Module or With SMA(F) Connectors
M = Module
P = With Connectors

Notes:

- Specifications are guaranteed when tested as a downconverter in a 50 Ohm system from -55°C to +100°C with the nominal LO power. Specifications indicated as typical are not guaranteed.
- Noise figure is typically within ±0.5 dB of conversion loss for IF frequencies greater than 10 MHz.
- Conversion loss typically degrades less than 0.5 dB at +100°C and improves less than 0.5 dB at -55°C.
- Usable LO drives are up to 2 dB below and 3 dB above nominal.

Typical Performance at 25°C

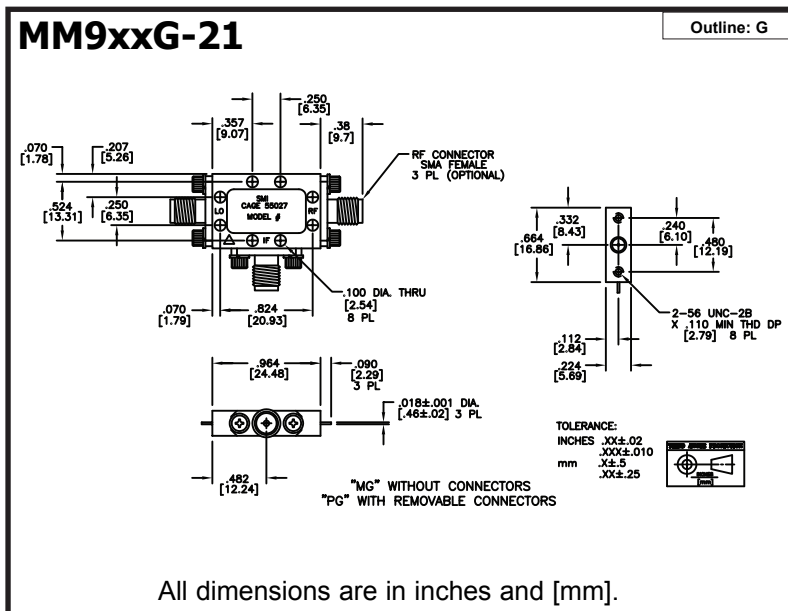

All dimensions are in inches and [mm].



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, FL 32905 · PH (888) 553-7531 · Fax (888) 553-7532

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, PA 19154 · PH (215) 464-4000 · Fax (215) 464-4001

REV A
8/3/10