

Surface Mount

Power Splitter/Combiner

SBA-2-22+
SBA-2-22

2 Way-0° 50Ω 2000 to 2600 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	2W max.
Internal Dissipation	0.125W max.


Pin Connections

SUM PORT	3
PORT 1	10
PORT 2	6
GROUND	1,2,4,5,7,8,9

Outline Drawing

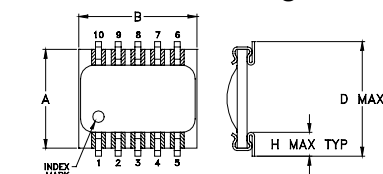

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±0.02
ADJACENT GROUND PINS SHALL BE CONNECTED
TO EACH OTHER AND TO GROUND PAD

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G	H		
.250	.300	.095	.290	.050	.015	.050	.060		
6.35	7.62	2.41	7.37	1.27	0.38	1.27	1.52		
J	K	L	M	N	P	Q	R	wt	
.030	.080	.300	.100	.020	.015	.070	.014	grams	
0.76	2.03	7.62	2.54	0.51	0.38	1.78	0.36	0.3	

Demo Board MCL P/N: TB-95 Suggested PCB Layout (PL-070)

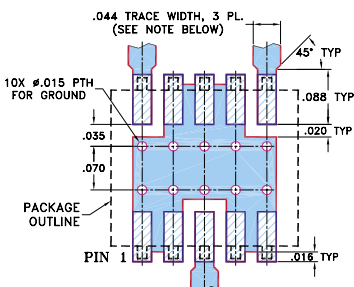

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low profile, 0.07" height
- low insertion loss, 0.8 dB typ.
- excellent amplitude unbalance, 0.3 dB typ.
- solder plated leads for excellent solderability and strain relief
- aqueous washable
- protected by U.S Patent, 5,534,830

Applications

- PCS

CASE STYLE: SM2
PRICE: \$6.95 ea. QTY. (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)




The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
	Typ.	Min.	Typ.	Max.	Max.	Max.
$f_c - f_u$						
2000-2600	18	10	0.8	1.6	10	0.8

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
2000.00	3.63	3.40	0.23	19.83	1.68	1.27	1.23	1.20
2050.00	3.65	3.42	0.23	20.46	1.76	1.30	1.23	1.20
2100.00	3.67	3.45	0.23	20.84	1.80	1.33	1.24	1.21
2150.00	3.70	3.47	0.23	20.96	1.76	1.36	1.24	1.21
2200.00	3.73	3.49	0.24	20.69	1.79	1.40	1.25	1.22
2225.00	3.74	3.50	0.24	20.47	1.83	1.43	1.26	1.22
2250.00	3.76	3.52	0.24	20.20	1.85	1.45	1.26	1.23
2300.00	3.80	3.56	0.24	19.50	1.90	1.50	1.27	1.24
2350.00	3.85	3.61	0.24	18.72	1.95	1.56	1.29	1.25
2400.00	3.90	3.65	0.25	17.92	1.99	1.63	1.30	1.26
2450.00	3.96	3.71	0.25	17.11	2.05	1.70	1.31	1.28
2500.00	4.02	3.77	0.25	16.31	2.12	1.77	1.33	1.29
2550.00	4.09	3.84	0.25	15.57	2.17	1.85	1.35	1.31
2575.00	4.13	3.88	0.25	15.22	2.22	1.90	1.36	1.32
2600.00	4.17	3.92	0.24	14.87	2.26	1.94	1.37	1.33

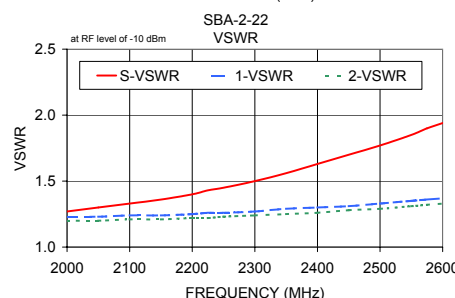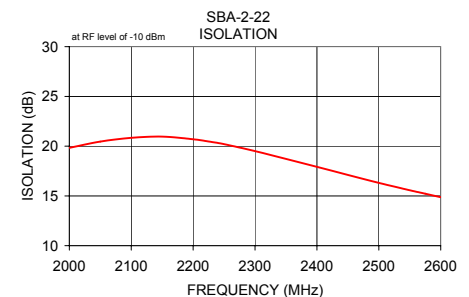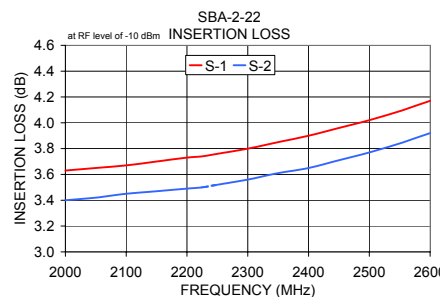

electrical schematic



Mini-Circuits
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. D
M115169
ED-8092
SBA-2-22
JS/TD/CP/AM
080124