



SME1400B-17

Broadband Surface Mount Mixer

The Communications Edge™

Product Features

- RF 1 to 2200 MHz
- LO 1 to 2200 MHz
- IF 1 to 2000 MHz
- LO Drive: +17 dBm (Other Levels Available)
- No Internal Solder Connections

Product Photo



Specifications

| Parameter | Units | Typical | Guaranteed | |
|---------------------------------------|-------|---------|------------|---------------|
| | | | +25°C | -40° to +70°C |
| SSB Conversion Loss | | | | |
| RF/LO = 10-1300 MHz, IF = 10-1000 MHz | dB | 6.5 | 8.0 | 8.5 |
| RF/LO = 10-2200 MHz, IF = 30-1000 MHz | dB | 7.5 | 9.0 | 9.5 |
| RF/LO = 1-2200 MHz, IF = 1-2000 MHz | dB | 8.0 | | |
| Port-to-Port Isolation | | | | |
| L-R = 10-1500 MHz | dB | 30 | 20 | 21 |
| L-R = 10-2200 MHz | dB | 25 | 15 | 17 |
| L-I = 10-2000 MHz | dB | 26 | 19 | 20 |
| L-I = 10-2200 MHz | dB | 22 | 15 | 16 |
| R-I | dB | 25 | | |
| 3rd Order Input Intercept Point | dBm | 27 | | |
| VSWR | | | | |
| R-Port = 600-2000 MHz | | 1.7:1 | | |
| R-Port = 10-2200 MHz | | 2.0:1 | | |
| L-Port = 600-2000 MHz | | 1.6:1 | | |
| L-Port = 10-2200 MHz | | 2.0:1 | | |
| I-Port | | 1.8:1 | | |
| 1 dB Conversion Compression | dBm | +13 | | |

1. Measured in a 50-ohm system with nominal LO drive of +17 dBm, low side LO, and downconverter application only, unless otherwise specified.

2. Measured at LO = 400-2100 MHz, RF = 500-2200 MHz, IF = 100 MHz, unless otherwise specified.

Absolute Maximum Ratings


| Parameter | Rating |
|-----------------------|------------------|
| Operating Temperature | -40 to +70°C |
| Storage Temperature | -65 to +100°C |
| RF Input Power | +23 dBm at +25°C |

Ordering Information


| Part No. | Description |
|-----------------|-------------------------------------|
| SME1400B-17 | Mixer (Available in tape and reel) |
| SME1400B-17-PCB | Fully assembled application circuit |

Performance Charts


IIP3 vs. Frequency

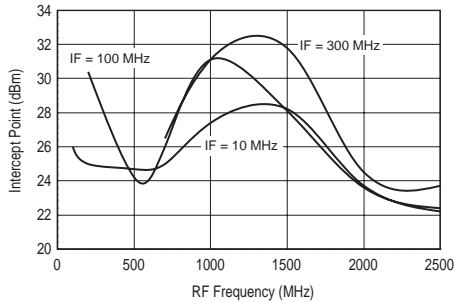


IIP3 vs. LO Power

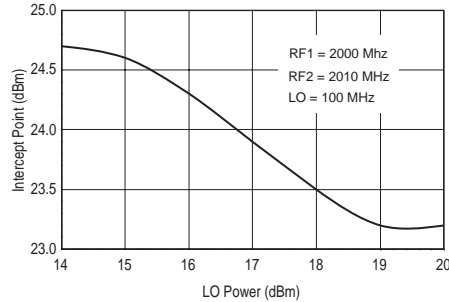


Conversion Loss vs. Frequency

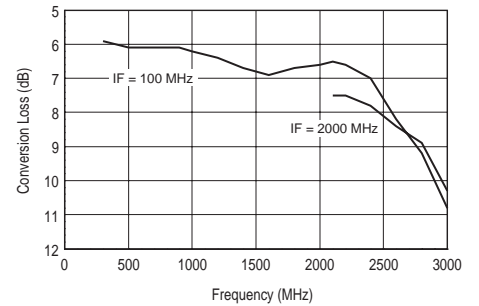


Conversion Loss vs. RFPower

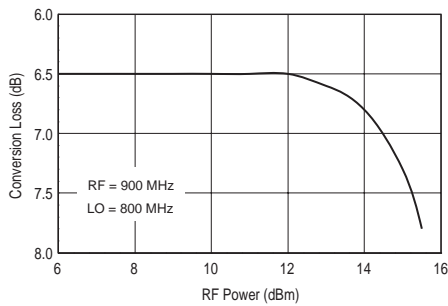


Conversion Loss vs. LO Power

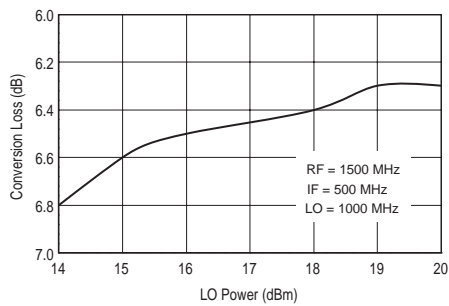


Conversion Loss vs. Temperature

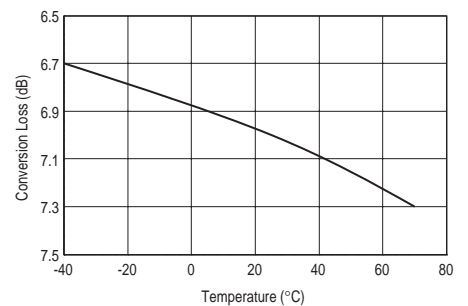

VSWR vs. Frequency

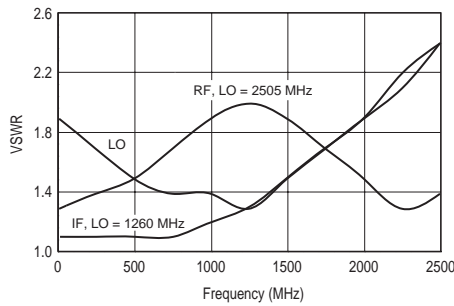

Isolation vs. Frequency

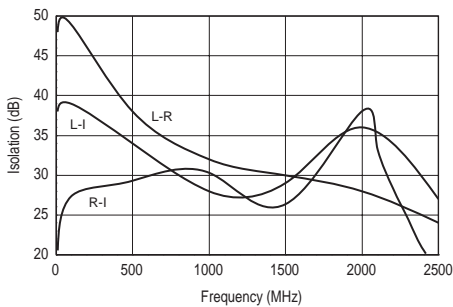

Single-Tone IM Products

| Harmonics of RF | Harmonics of fLO | | | | | |
|-----------------|------------------|-----|-----|-----|-----|-----|
| | 0 | 1 | 2 | 3 | 4 | 5 |
| 0 | | 22 | 27 | 28 | 39 | 34 |
| 1 | 17 | 0 | 19 | 23 | 39 | 46 |
| 2 | 64 | 60 | 61 | 60 | 65 | 73 |
| 3 | >80 | 77 | >80 | 78 | >80 | >80 |
| 4 | >80 | >80 | >80 | >80 | >80 | >80 |
| 5 | >80 | >80 | >80 | >80 | >80 | >80 |


| LO Mult | RF Mult | LO MHz | RF MHz | MHz | IM Prod dB |
|---------|---------|--------|--------|-------|------------|
| 0 | 1 | 2150 | 2200 | 2200 | 17 |
| 0 | 2 | 2150 | 2200 | 4400 | 64 |
| 0 | 3 | 2150 | 2200 | 6600 | 81 |
| 0 | 4 | 2150 | 2200 | 8800 | 86 |
| 0 | 5 | 2150 | 2200 | 11000 | 86 |
| 1 | 0 | 2150 | 2200 | 2150 | 22 |
| -1 | 1 | 2150 | 2200 | 50 | 0 |
| -1 | 2 | 2150 | 1100 | 50 | 60 |
| -1 | 3 | 2150 | 734 | 52 | 77 |
| -1 | 4 | 2150 | 550 | 50 | 92 |
| -1 | 5 | 2150 | 440 | 50 | 89 |
| 2 | 0 | 2150 | 2200 | 4300 | 27 |
| -2 | 1 | 2150 | 4350 | 50 | 19 |
| -2 | 2 | 2150 | 2175 | 50 | 61 |
| -2 | 3 | 2150 | 1450 | 50 | 85 |
| -2 | 4 | 2150 | 1088 | 52 | 90 |
| -2 | 5 | 2150 | 870 | 50 | 88 |
| 3 | 0 | 2150 | 2200 | 6450 | 28 |
| -3 | 1 | 2150 | 6500 | 50 | 23 |
| -3 | 2 | 2150 | 3250 | 50 | 60 |
| -3 | 3 | 2150 | 2167 | 51 | 78 |
| -3 | 4 | 2150 | 1625 | 50 | 89 |
| -3 | 5 | 2150 | 1300 | 50 | 88 |
| 4 | 0 | 2150 | 2200 | 8600 | 39 |
| -4 | 1 | 2150 | 8650 | 50 | 39 |
| -4 | 2 | 2150 | 4325 | 50 | 65 |
| -4 | 3 | 2150 | 2884 | 52 | 81 |
| -4 | 4 | 2150 | 2163 | 52 | 90 |
| -4 | 5 | 2150 | 1730 | 50 | 87 |
| 5 | 0 | 2150 | 2200 | 10750 | 34 |
| -5 | 1 | 2150 | 10800 | 50 | 46 |
| -5 | 2 | 2150 | 5400 | 50 | 73 |
| -5 | 3 | 2150 | 3600 | 50 | 88 |
| -5 | 4 | 2150 | 2700 | 50 | 89 |
| -5 | 5 | 2150 | 2160 | 50 | 89 |

Test Conditions RF at -10 dBm, LO at +17 dBm

RF harmonics and intermodulation products are referenced to a desired signal produced by $f_{RF} = 2200$ MHz and $f_{LO} = 2150$ MHz.


LO harmonics are referenced to the LO drive signal.

Outline Drawing

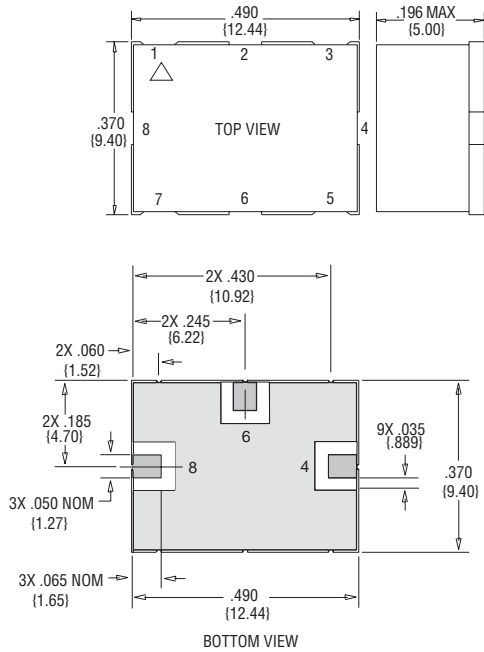

| Function | Pin No. |
|----------|-----------|
| RF | 4 |
| LO | 8 |
| IF | 6 |
| GND | 1,2,3,5,7 |

Land Pattern

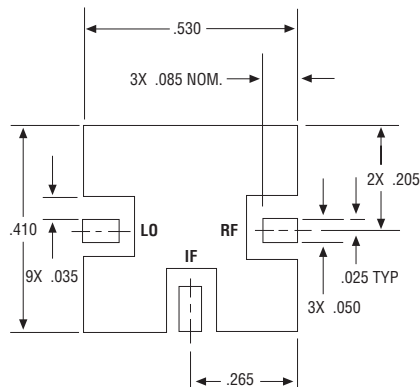

Specifications and information are subject to change without notice.



Caution! ESD sensitive device.

