



Constellation®

Microwave Digital Radios

Systems Application

P/N SAI-112874-E09



CONSTELLATION®

MICROWAVE RADIO

SYSTEM APPLICATION MANUAL
PART No. SAI-112874-E09
JANUARY 2006



Revision history

Issue date	Status	Description of change / revision
January 2006	PCO 25195	• Periodic update

Part N° SAI-112874-E09
© Copyright 2006 HARRIS CORPORATION. All rights reserved.
Constellation®, FARSCAN™, and STARVIEW™ are trademarks of
HARRIS CORPORATION

Data subject to change without notice.

Harris Corporation -
Microwave Communications Division
637 Davis Drive
Morrisville, NC 27560
U.S.A.
1-800-227-8332
FAX: 1-919-767-3233

Harris Corporation -
Microwave Communications Division
3, rue de l'Hôtel de Ville
Dollard-des-Ormeaux, Québec,
Canada H9B 3G4
1-800-227-8332 or 1-514-421-8400
FAX: 1-514-421-3555

WARNING

Making adjustments and/or modifications to this equipment that are not in accordance with the provisions of this instruction manual or other supplementary documentation may result in personal injury or damage to the equipment, and may void the equipment warranty.

AVERTISSEMENT

Tout réglage ou modification faits à cet équipement hors du cadre édicté par ce guide d'utilisation ou par toute autre documentation supplémentaire pourraient causer des blessures ou endommager l'équipement et peut entraîner l'annulation de sa garantie.

WARNUNG

Die an diesen Geräten gemachte Einstellungen und/oder Änderungen, welche nicht gemäß dieser Bedienungsanleitung, oder gemäß anderen zusätzlichen Anleitungen, ausgeführt werden, können Verletzungen oder Materialschäden zur Folge haben und eventuell die Garantie ungültig machen.

ATENCIÓN

Llevar a cabo ajustamientos y/o modificaciones a este equipo, sin seguir las instrucciones provistas por este manual u otro documento adicional, podría resultar en lesiones a su persona o daños al equipo, y anular la garantía de este último.

警告

不按该说明书有关条例或其它补充文件对该设备所做的调整和 / 或 改型可能会引起人身伤害或损坏设备，并且设备保修也将失效。

CONTENTS

LIST OF FIGURES	V
------------------------------	----------

LIST OF TABLES.....	VII
----------------------------	------------

PREFACE	IX
----------------------	-----------

ISO 9001 Certification	ix
Technical Assistance Center	ix

CHAPTER 1, GENERAL INFORMATION	1-1
---	------------

Introduction	1-1
The Constellation Radio	1-1
Interfaces	1-1
Standard Features	1-2
Optional Features	1-2
Harris' Proven Ability	1-2
Statement of Accuracy and Liability	1-3

CHAPTER 2, FREQUENCY PLANNING.....	2-1
---	------------

1+1 Frequency Selection	2-1
1+1 Frequency Spacing for Hot-standby (HS) and Nonprotected (NP) Radios	2-1
1+1 Intermodulation Products for Multiple HS or NP Radios with Common Antenna	
Feedline	2-2
Frequency Bands	2-2
Channel Assignments	2-4
Canada.....	2-4
Industry Canada, GL-34.....	2-4
Industry Canada, SRSP-305.9	2-5
Industry Canada, SRSP-306.4	2-5
Industry Canada, SRSP-307.1	2-7
Industry Canada, SRSP-307.7	2-8
Industry Canada, SRSP-310.5	2-9
Industry Canada, SRSP-310.7	2-9
International	2-10
ITU-R 385-6 A4	2-10
ITU-R 386-5 A3	2-10
U.S.A.	2-11
FCC Part 101.....	2-11
Regulatory Information Licensed Part 101 Service	2-17

CHAPTER 3, CONSTELLATION RADIO CONFIGURATIONS.....3-1

The Constellation Radio	3-1
Low/Medium Capacity Radio	3-1
Upgradability.....	3-1
High Capacity Radio	3-2
3xDS3/4xDS3 and 155 Optical/Electrical Configurations	3-2
Network Management and Control	3-4
Network Management Interfaces.....	3-4
User-Friendly Radio Interface Tool	3-4
External Alarm/Control	3-4
Antenna Coupling Unit (ACU)	3-4
Configurations	3-5
Multiplexer.....	3-5
Constellation DS3 Interface.....	3-7
Constellation 4xDS3/3xDS3 Interface	3-9
Radio Synchronization Configuration	3-12

CHAPTER 4, TECHNICAL SPECIFICATIONS.....4-1

Power Requirements (Top of Rack)	4-1
Power Consumption	4-1
Power Source	4-2
Power Source Voltage.....	4-2
Power Source Noise	4-2
Built-in Radio Fuse Panel	4-2
Circuit Breakers.....	4-3
RF Performance Specifications	4-3
Transmitter	4-10
Frequency Stability	4-10
Unwanted (Out-of-Band and Spurious) Emissions.....	4-10
Receiver	4-10
General Specifications	4-10
Receiver Overload*	4-11
Dispersive Fade Margin (DFM)	4-11
Signal Acquisition Time.....	4-11
Auto-DADE	4-11
Tributary Interface	4-12
Tributary Signal Characteristics	4-12
Tributary Jitter	4-12
Tributary Specification Compliance.....	4-13
SDH/SONET Overhead Usage Map.....	4-13
Signal Processing	4-14
Equipment Transmission Delay Time	4-14
Modulation.....	4-14
Protection Switching	4-15
1+1 Transmitter and Receiver Switching	4-15
Hot-Standby Transmitter Switching	4-15
Reverse Path Protection.....	4-15
HS Receiver Switching	4-15
Space Diversity Receiver Switching	4-15

Maintenance	4-15
Manual Switch-over.....	4-16
1+1 Switching Times.....	4-16
Supervisory Interfaces	4-16
Network Management Interface	4-16
Alarms	4-17
Radio Alarm LED Indicators	4-17
Site Status Inputs and Control Outputs	4-17
Alarm List for Relay Output	4-18
Relay Specifications	4-18
Environmental Specifications	4-19
Electromagnetic Emissions	4-19
Conducted Emissions.....	4-19
Ambient Temperature, Humidity, and Altitude.....	4-19
Earthquake, Shock, and Vibration	4-19
Test specification	4-19
Rack Specifications	4-19
Mechanical Dimensions	4-20
EIA Rack	4-20
Constellation Radio	4-20
Weights (Typical)	4-20

CHAPTER 5, SYSTEM INTERCONNECT AND CONFIGURATION 5-1

System Interconnection	5-1
Orderwire Interconnection.....	5-1
Four-Wire VF Orderwire Interface.....	5-4
Two-Wire VF Orderwire Interface	5-5
Address.....	5-5
Data Orderwire Interface	5-5
SCAN Equipment Interconnection.....	5-7

CHAPTER 6, ANTENNA COUPLING UNIT (ACU)..... 6-1

ACU Waveguide Flanges	6-1
ACU Configuration and Mechanical Drawings	6-2
Available Configurations	6-2
List of ACU Mechanical Drawings.....	6-3
ACU Mechanical Drawings	6-3
ACU Port Configurations	6-9

CHAPTER 7, PERFORMANCE CURVES 7-1

Performance Curves	7-1
Threshold-to-Interference (T/I) Ratios	7-2
Overview	7-2
Like Signal T/I Ratio.....	7-3
T/I Curves	7-4
Receiver Signal-to-Noise Characteristics	7-12
BER versus C/N Curve	7-12

BER versus RSL Dynamic Range	7-17
APPENDIX A, RACK PROFILES.....	A-1
19-inch Rack Frame	A-1
APPENDIX B, GLOSSARY	B-1
INDEX	

LIST OF FIGURES

Figure 3-1: Traffic Plan Example for 3xDS3 (2xDS3+28 DS1)	3-3
Figure 3-2: Multiplexer configuration for a radio terminal	3-5
Figure 3-3: Multiplexer configuration for a radio-to-radio repeater	3-6
Figure 3-4: Multiplexer configuration for a dual radio terminal	3-6
Figure 3-5: Constellation radio terminal, DS3 interface	3-7
Figure 3-6: 28 DS1 to DS3 application	3-7
Figure 3-7: 28 DS1 to repeater to DS3 application	3-8
Figure 3-8: 4xDS3 to 4xDS3 configuration	3-9
Figure 3-9: 3xDS3 to 3xDS3 configuration	3-9
Figure 3-10: 3xDS3 to 3xDS3 back-to-back terminals	3-10
Figure 3-11: 3xDS3 configured as a 2xDS3 + 28DS1 configuration	3-10
Figure 3-12: 3xDS3 configured as 2xDS3 + 28DS1 back-to-back terminals	3-11
Figure 3-13: 3(4)xDS3 configured as 2(3)xDS3 + 28DS1 terminal, ADM repeater, and 3(4)xDS3 terminal	3-11
Figure 3-14: OC-3/STM-1 to OC-3/STM-1 Configuration	3-12
Figure 4-1: Battery voltage noise limit	4-2
Figure 6-1: ACU, nonprotected (top view), mechanical drawing	6-3
Figure 6-2: ACU, nonprotected (front view), mechanical drawing	6-4
Figure 6-3: ACU, hot-standby (top view), mechanical drawing	6-4
Figure 6-4: ACU, hot-standby (front view), mechanical drawing	6-5
Figure 6-5: ACU, hot-standby Transmitters, space-diversity Receivers (top view), mechanical drawing	6-5
Figure 6-6: ACU, hot-standby Transmitters, space-diversity Receivers (front view), mechanical drawing	6-6
Figure 6-7: ACU, hot-standby/frequency-diversity, 2-antenna (T/R, T/R) (top view), mechanical drawing	6-6
Figure 6-8: ACU, hot-standby/frequency-diversity 2-antenna (T/R, T/R) (front view), mechanical drawing	6-7
Figure 6-9: ACU, repeater/dual terminal, mechanical drawing	6-8
Figure 7-1: Typical threshold-to-interference (T/I) curve (6 GHz and 7/8 GHz, 8 DS1) 7-4	
Figure 7-2: Typical threshold-to-interference (T/I) curve (10/11 GHz, 8 DS1)	7-5
Figure 7-3: Typical threshold-to-interference (T/I) curve (6 GHz and 7/8 GHz, 16 DS1) .	7-6

Figure 7-4: Typical threshold-to-interference (T/I) curve (10/11 GHz, 16 DS1)	7-7
Figure 7-5: Typical threshold-to-interference (T/I) curve (6 GHz and 7/8 GHz, 28 DS1/DS3)	7-8
Figure 7-6: Typical threshold-to-interference (T/I) curve (10/11 GHz, 28 DS1/DS3) .	7-9
Figure 7-7: Typical threshold-to-interference (T/I) curve (6, 7/8, 10/11 GHz, 155 Mbit/s, 128 TCM)	7-10
Figure 7-8: Typical threshold-to-interference (T/I) curve (6, 7/8, 10/11 GHz, 4DS3)	7-11
Figure 7-9: Typical BER versus C/N curve (8 DS1)	7-12
Figure 7-10: Typical BER versus C/N curve (16 DS1)	7-13
Figure 7-11: Typical BER versus C/N curve (28 DS1/DS3)	7-14
Figure 7-12: Typical BER versus C/N curve (Constellation 155)	7-15
Figure 7-13: Typical BER vs. C/N and C/I (Constellation 155)	7-16
Figure 7-14: Typical BER versus RSL curve	7-17
Figure A-1: EIA 19-inch rack frame and pedestal detail (top view)	A-1
Figure A-2: EIA 19-inch rack frame and pedestal detail	A-2

LIST OF TABLES

Revision history	-3
Table 2-1: Frequency spacing	2-1
Table 2-2: Frequency band, Canada	2-2
Table 2-3: Frequency band, International.....	2-3
Table 2-4: Frequency band, U.S.A.....	2-3
Table 2-5: 5850 MHz to 5915 MHz (Industry Canada, GL-34)	2-4
Table 2-6: 5915 MHz to 6425 MHz (Industry Canada SRSP-305.9)	2-5
Table 2-7: 6425 MHz to 6930 MHz (Industry Canada, SRSP-306.4)	2-5
Table 2-8: 7125 MHz to 7725 MHz (Industry Canada, SRSP-307.1)	2-7
Table 2-9: 7725 MHz to 8275 MHz (Industry Canada, SRSP-307.7)	2-8
Table 2-10: 10550 MHz to 10595 MHz and 10615 MHz to 10660 MHz (Industry Canada, SRSP-310.5)	2-9
Table 2-11: 10700 MHz to 11700 MHz (Industry Canada, SRSP-310.7)	2-9
Table 2-12: 7425 MHz to 7900 MHz (ITU-R 385-6 A4)	2-10
Table 2-13: 8275 MHz to 8500 MHz (ITU-R 386-5 A3)	2-10
Table 2-14: 5925 MHz to 6425 MHz (FCC Part 101)	2-11
Table 2-15: 6525 MHz to 6875 MHz (FCC Part 101)	2-12
Table 2-16: 10550 MHz to 10680 MHz (FCC Part 101)	2-13
Table 2-17: 10700 MHz to 11700 MHz (FCC Part 101)	2-14
Table 2-18: 10700 MHz to 11700 MHz (FCC Part 101)	2-15
Table 2-19: 10700 MHz to 11700 MHz (FCC Part 101)	2-16
Table 2-20: FCC Form 601	2-17
Table 2-20: FCC Form 601continued	2-18
Table 4-1: Recommended circuit breaker sizes	4-3
Table 4-2: Additional ACU loss.....	4-3
Table 4-3: RF performance specifications	4-4
Table 4-4: DFM* with delay of 6.3 ns	4-11
Table 4-5: Line Interface Specifications	4-12
Table 4-6: Detailed Optical Specifications.....	4-12
Table 4-7: Network management interface.....	4-16
Table 4-8: Relay specifications	4-18
Table 5-1: Orderwire interconnection	5-2
Table 5-2: Four-wire VF Orderwire input specifications.....	5-4
Table 5-3: Four-wire VF ports performance specifications	5-4
Table 5-4: Ringing generator specifications	5-4

Table 5-5: Output voltage range (with 7k ohm load)	5-6
Table 5-6: Input voltage range	5-6
Table 5-7: SCAN equipment interconnection	5-7
Table 6-1: Standard flange specifications	6-1
Table 6-2: Spacer adapter height, standard (other interfaces available)	6-1
Table 6-3: Available ACU configurations*	6-2
Table 6-4: X dimension from floor, ACU, repeater/dual terminal	6-8
Table 6-5: ACU port configurations	6-9
Table 7-1: Like signal T/I for 6 and 7/8 GHz	7-3
Table 7-2: Like signal T/I for 10/11 GHz	7-3

PREFACE

ISO 9001 Certification

The Harris Microwave Communications Division is committed to total customer satisfaction and is I.S. EN ISO 9001: 2000 registered for the design, manufacture, installation and service of microwave radio products and systems.

Technical Assistance Center

Our Technical Assistance Center (TAC) is staffed with factory trained and highly qualified Product Support staff whose task is to provide telephone support to resolve complex customer equipment problems quickly and accurately in a timely manner. Customers who completed product training given by Harris Microwave Communications Division and are equipped with proper test equipment and spare parts will experience quick resolution of their equipment problems.

Harris Corporation — Microwave Communications Division

637 Davis Drive

Morrisville, NC 27560, USA

Phone: 1-800-227-8332

(Outside North America: 1-514-421-8333)

Email: crcusa@harris.com

Harris Corporation — Microwave Communications Division

3 Hotel-de-Ville

Dollard-des-Ormeaux, Quebec

Canada H9B 3G4

Phone: 1-800-227-8332 or 1-514-421-8333

Fax: 1-514-685-4580

Email: crcmtl@harris.com (point-to-point)

bwa@harris.com (point-to-multipoint)

Harris S.A. de C.V.

Boulevard Manuel Avila Camacho #36 Piso 17

Col. Lomas de Chapultepec

C.P. 11000

Torres Esmeralda II

Mexico D.F.

Phone: +52-55-5-249 3700 or 800-872-0061

Fax: +52-55-5-249 3701 & 02

Email: crcmex@harris.com

Orbecom c/o Harris Microwave Division

Calle 101, No. 44-58

Bogota, Colombia

Phone: +57-1-533-0912

Email: wotero@harris.com

Harris do Brasil

Edificio STADIUM

Al. Rio Negro 1030

Conjuntos 202/204/206

CEP 06454-000

Alphaville

Barueri - SP

Phone: +55-11-4197-3000

FAX: +55-11-4197-3001

Email: crcbraz@harris.com

Coasin Comunicaciones S.A.

Adolfo Alsina, 1322

(C1088AAJ) Buenos Aires

Argentina

Phone: +54-11-4383-0074

Fax: +54-11-4383-0075

Email: coasin@coasincom.com.ar

Harris Communication S.A.

Centrale Parc

Avenue Sully Prud'homme

92298 Chatenay-Malabry-France

France

Phone: +33- 1-55-52-8080 or 800-55-52-8080

Fax: +33-1-55-52-8012

Email: crcmea@harris.com

Blue-Chip Communications Limited

247B Muri Okunola Street

Victoria Island

Lagos, Nigeria

Phone: +234-1-555-8257 or +234-803-303-8183

Fax: +234-1-461-6166

Harris Communications (Shenzhen)

R3-B2 High Tech. Industrial Park

Nanshan District, Shenzhen 518057

The People's Republic of China

Phone: +86-755-663-7928

Fax: +86-755-663-7048

Trisilco Folec

36-1 Jalan PJU 8/5B, Perdana Business Centre

Bandar Damansara Perdana

47820 Petaling Jaya

Selangor Darul Ehsan

Malaysia

Phone: +60-3-7728-8228 ext. 8319

Fax: +60-3-7722-2826

Email: LeeEH@trisilco.com.my or rahaidah@trisilco.com.my

**Harris Microwave Customer Support**

Harris provides world-class service for all our valued customers including 24/7 technical support. Your priority calls are handled through our Technical Assistance Center (TAC):

Call: 800-227-8332

(outside North America 514-421-8333)

You can also contact us through email at:

crcusa@harris.com

Registered customers can obtain key product information on our
Premier Web Site at: <https://premier.harris.com/microwave>



Service Registration Form

Dear Customer,
To facilitate warranty support and to receive product update information, please register on the Harris MCD Premier Customer website:

<https://premier.harris.com/microwave>

If you are unable to register online, please complete the form at the bottom of this page and return this page to our customer service department.

By Fax: 514-685-4580

By email: crcmtl@harris.com

By mail: Harris Corporation
Microwave Communications Division
3 Hotel de Ville
Dollard-des-Ormeaux, Quebec
CANADA H9B3G4

PLEASE PRINT:

Company Name: _____

Requestor's Name: _____

Title: _____ Dept: _____

Address: _____

City: _____ State/Province: _____

ZIP/Postal Code: _____ Country: _____

Telephone Number: _____ Fax Number: _____

Email: _____

Original Sales Order/PO Number: _____

Sales order numbers are found in your documentation and are stencilled on the equipment rack base plate, for example, A44044A1.

GENERAL INFORMATION

Introduction

The Systems Application Information (SAI) provides technical information required for determining communication system design, site layout, and interface equipment compatibility. This information will assist in the configuration of Constellation digital microwave radio equipment.

The Constellation Radio

Constellation radios make up one of Harris' families of high-quality transmission equipment. The radios feature multiple capacities and frequency bands, upgrade capability, high commonality of spares, and are compatible with existing systems and equipment.

Interfaces

- 8/16/28 DS1 (integrated multiplexer), 1xDS3
- Multi-mode OC3, OC3c, STS3
- Single-mode OC3, OC3c, STS3
- 3xDS3, 2xDS3+28xDS1 (integrated multiplexer or ADM) arrangements
- 4xDS3, 3xDS3+28xDS1 (integrated multiplexer or ADM) arrangements
- DS1 wayside channel for OC3, OC3c, STS3, 3xDS3, 2xDS3+28xDS1

Standard Features

- Common platform for upgrade paths from 4xDS1 to OC3, 3xDS3, 4xDS3
- Auto-DADE: main and space diversity receiver signal delays are automatically equalized up to a diversity antenna spacing of 150 feet
- Automatic Transmit Power Control (ATPC); ~2.5 to 10 dB ATPC range
- Software Programmable Output Power Level: Local PA power adjustment via keypad
- Synthesized RF sources
- Remote inventory management and software download
- System and tributary BER measurement capability
- Redundant configuration storage for module replacement
- Individual DS1s programmable for line coding and line length
- Eight programmable alarm dry contact relay outputs and eight opto-isolated alarm inputs
- ACU expansion port
- Standard interfaces for OEM equipment

Optional Features

- High System Gain Option for OC3, 3xDS3, 2xDS3+28xDS1, 4xDS3, 3xDS3+28xDS1
- High System Gain Option for 16xDS1, 28xDS1, 1xDS3
- Paperless Chart Recorder diagnostic tool
- Repeater with integrated ADM (to 16xDS1), 8/16/28xDS1 radios
- Service Channel: 1 VF Orderwire and 1 Data Channel
- Keypad (VT-100 compatible)

Harris' Proven Ability

Harris has a reputation as a worldwide supplier of cost-effective communication solutions for small and large networks. Many types of businesses, including telephone companies, government agencies, educational institutions, broadcast stations, pipelines, railroads, transportation agencies, gas and electric utilities, public safety agencies, wireless telephone providers, hospitals, and other organizations with communication networks in the United States, Canada, and over 100 other countries are satisfied Harris customers.

Statement of Accuracy and Liability

Harris reserves the right to make changes in circuit design, specifications, services, and other information at any time without prior notice. Harris does not assume responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Harris Corporation.

FREQUENCY PLANNING

1+1 Frequency Selection

1+1 Frequency Spacing for Hot-standby (HS) and Nonprotected (NP) Radios

Recommended paired frequencies are shown beginning on [page 2-4](#). However, any of the listed transmit frequencies may be used with any of the listed receive frequencies, provided the minimum T-to-R separation is maintained. It is recommended that any unlisted frequency be verified by Harris MCD.

Table 2-1: Frequency spacing

Frequency (GHz)	Minimum Spacing		T-to-T (for like signal)	
	T-to-R			
	8T-28T/ DS3 (MHz)	155 Mbit/ 3DS3/4DS3 (MHz)	8T-28T/ DS3 (MHz)	155 Mbit/ 3DS3/4DS3 (MHz)
6	50 ^a	100	40	56
7/8	50	100	40	56
10	65	100	45	56
11	76	100	47	56

a. Narrowband transmit filter is available for 33.5 MHz T/R spacing of LL6 GHz band specified in Industry Canada GL-34.

1+1 Intermodulation Products for Multiple HS or NP Radios with Common Antenna Feedline

For single antenna configurations, to avoid creation of intermodulation conversion products in the ferrite devices which can cause threshold degradation in a local receiver, the following rule must be observed.

The intermodulation frequency products that result from combining two or more transmitter frequencies on a common antenna feeder must be 48 MHz or more above or below each of the receiver frequencies on that antenna feeder. Note that all possible combinations must be taken into account (for example, 2A-B, 2B-D, A+B-C, C+D-B, and so forth).

Frequency Bands

Constellation radios are available in 6, 7, 8, 10, and 11 GHz frequency bands. The following tables show the frequency bands for the various countries.

Table 2-2: Frequency band, Canada

Frequency Band (MHz)	Channel Bandwidth (MHz)	In Compliance with Industry Canada
5850 to 5915	3.5 5.25 10	GL-34 ^a
5915 to 6425	29.65	SRSP-305.9
6425 to 6930	10 30	SRSP-306.4
7125 to 7725	3.75 5 10 30	RSP-307.1
7725 to 8275	10 30	SRSP-307.7
10550 to 10680	3.75 5	SRSP-310.5
10700 to 11700 ^b	40	SRSP-310.7

a. These systems are not included in SP 305.8. Refer to GL-34 for details.

b. 11,650 to 11,700 MHz is on reserve in Canada.

Table 2-3: Frequency band, International

Frequency Band (MHz)	Channel Bandwidth (MHz)	In compliance with ITU-R
7425 to 7900	14	Rec. 385-6 A4
8275 to 8500	14	Rec. 386-5 A3
7110 to 7750	28	Rec. 385-6 A3
7425 to 7725	28	Rec. 385-6 A1
7425 to 7900	28	Rec. 385-6 A4
7725 to 8275	29.65	Rec. 386-4 A1

Table 2-4: Frequency band, U.S.A.

Frequency Band (MHz)	Channel Bandwidth (MHz)	In Compliance With
5925 to 6425	3.75 5 10 30	FCC Part 101
6525 to 6875	3.75 5 10	FCC Part 101
7125 to 8500	3.75 5 10	NTIA (US Government)
10550 to 10680	3.75 5	FCC Part 101
10700 to 11700	3.75 5 10 30	FCC Part 101

Channel Assignments

Canada

Industry Canada, GL-34¹

Table 2-5: 5850 MHz to 5915 MHz (Industry Canada, GL-34)

3.5 MHz Bandwidth		5 MHz Bandwidth		10 MHz Bandwidth	
Transmit (Receive) (MHz)	Receive (Transmit) (MHz)	Transmit (Receive) (MHz)	Receive (Transmit) (MHz)	Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
5851.75	5885.25	5852.825	5886.125	5855	5900
5855.25	5888.75	5857.875	5891.375	5865	5910
5858.75	5892.25	5863.125	5896.625		
5862.25	5895.75	5868.375	5901.875		
5865.25	5899.25	5873.625	5907.125		
5869.25	5902.75	5878.875	5912.375		
5872.75	5906.25				
5876.25	5909.75				
5879.75	5913.25				

1. These systems are not included in SP 305.8. Please refer to GL-34 for details.

Industry Canada, SRSP-305.9

Table 2-6: 5915 MHz to 6425 MHz (Industry Canada SRSP-305.9)

29.65 MHz Bandwidth

Group A (main/preferred)

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
5945.20	6197.24
5974.85	6226.89
6004.50	6256.54
6034.15	6286.19
6063.80	6315.84
6093.45	6345.49
6123.10	6375.14
6152.75	6404.79

Group B^a (interleaved)

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
5930.37	6182.41
5960.02	6212.06
5989.67	6241.71
6019.32	6271.36
6048.97	6301.01
6078.62	6330.66
6108.27	6360.31
6137.92	6389.96

a. Same as FCC Part 21/101 and ITU-R Rec. 383-5 alt. International Channels.

Industry Canada, SRSP-306.4

Table 2-7: 6425 MHz to 6930 MHz (Industry Canada, SRSP-306.4)

10 MHz Bandwidth

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
340 MHz Tx-Rx Spacing	
6435	6775
6445	6785
6455	6795
6465	6805
6475	6815
6485	6825
6495	6835
6505	6845
6515	6855
6525	6865

30 MHz Bandwidth

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
340 MHz Tx-Rx Spacing	
6445	6785
6475	6815
6505	6845
6535	6875
6565	6905
100 MHz Tx-Rx Spacing	
6595	6695
6625	6725
6655	6755

Table 2-7: 6425 MHz to 6930 MHz (Industry Canada, SRSP-306.4) (Continued)**10 MHz Bandwidth**

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
6535	6875
6545	6885
6555	6895
6565	6905
6575	6915
6585	6925

30 MHz Bandwidth

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
---	---

90 MHz Tx-Rx Spacing

6595	6685
6605	6695
6615	6705
6625	6715
6635	6725
6645	6735
6655	6745
6665	6755
6675	6765

Industry Canada, SRSP-307.1

Table 2-8: 7125 MHz to 7725 MHz (Industry Canada, SRSP-307.1)

5 MHz Bandwidth		5 MHz Bandwidth		10 MHz Bandwidth		30 MHz Bandwidth	
Transmit (Receive) (MHz)	Receive (Transmit) (MHz)	Transmit (Receive) (MHz)	Receive (Transmit) (MHz)	Transmit (Receive) (MHz)	Receive (Transmit) (MHz)	Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
175 MHz Tx-Rx Spacing		150 MHz Tx-Rx Spacing		175 MHz Tx-Rx Spacing			
7127.5	7302.5	7427.5	7577.5	7130	7305	7140	7315
7132.5	7307.5	7432.5	7582.5	7140	7315	7440	7590
7137.5	7312.5	7437.5	7587.5	7150	7325		
7142.5	7317.5	7442.5	7592.5	7160	7335		
7147.5	7322.5	7447.5	7597.5	7170	7345		
7152.5	7327.5	7452.5	7602.5	7180	7355		
7157.5	7332.5	7457.5	7607.5	7190	7365		
7162.5	7337.5	7462.5	7612.5	7200	7375		
7167.5	7342.5	7467.5	7617.5	7210	7385		
7172.5	7347.5	7472.5	7622.5	7220	7395		
7177.5	7352.5	7477.5	7627.5	7230	7405		
7182.5	7357.5	7482.5	7632.5	7240	7415		
7187.5	7362.5	7487.5	7637.5	150 MHz Tx-Rx Spacing			
7192.5	7367.5	7492.5	7642.5	7430	7580		
7197.5	7372.5	7497.5	7647.5	7440	7590		
7202.5	7377.5	7502.5	7652.5	7450	7600		
7207.5	7382.5	7507.5	7657.5	7460	7610		
7212.5	7387.5	7512.5	7662.5	7470	7620		
7217.5	7392.5	7517.5	7667.5	7480	7630		
7222.5	7397.5	7522.5	7672.5	7490	7640		
7227.5	7402.5	7527.5	7677.5	7500	7650		
7232.5	7407.5	7532.5	7682.5	7510	7660		
7237.5	7412.5	7537.5	7687.5	7520	7670		
7242.5	7417.5	7542.5	7692.5	7530	7680		
7247.5	7422.5	7547.5	7697.5	7540	7690		
		7552.5	7702.5	7550	7700		
		7557.5	7707.5	7560	7710		
		7562.5	7712.5	7570	7720		
		7567.5	7717.5				
		7572.5	7722.5				

Table 2-9: 7725 MHz to 8275 MHz (Industry Canada, SRSP-307.7)

10 MHz Bandwidth		30 MHz Bandwidth	
Transmit (Receive) (MHz)	Receive (Transmit) (MHz)	Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
7730	8030	7740	8040
7740	8040	7770	8070
7750	8050	7800	8100
7760	8060	7830	8130
7770	8070	7860	8160
7780	8080	7890	8190
7790	8090	7920	8220
7800	8100	7950	8250
7810	8110		
7820	8120		
7830	8130		
7840	8140		
7850	8150		
7860	8160		
7870	8170		
7880	8180		
7890	8190		
7900	8200		
7910	8210		
7920	8220		
7930	8230		
7940	8240		
7950	8250		
7960	8260		
7970	8270		

Industry Canada, SRSP-310.5**Table 2-10: 10550 MHz to 10595 MHz and 10615 MHz to 10660 MHz (Industry Canada, SRSP-310.5)**

5 MHz Bandwidth

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
10552.5	10617.5
10557.5	10622.5
10562.5	10627.5
10567.5	10632.5
10572.5	10637.5
10577.5	10642.5
10582.5	10647.5
10587.5	10652.5
10592.5	10657.5

Industry Canada, SRSP-310.7**Table 2-11: 10700 MHz to 11700 MHz (Industry Canada, SRSP-310.7)**

40 MHz Bandwidth

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
10735	11225
10775	11265
10815	11305
10855	11345
10895	11385
10935	11425
10975	11465
11015	11505
11055	11545
11095	11585
11135	11625

International

ITU-R 385-6 A4

Table 2-12: 7425 MHz to 7900 MHz (ITU-R 385-6 A4)

14 MHz Bandwidth

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
7435	7680
7449	7694
7463	7708
7477	7722
7491	7736
7505	7750
7519	7764
7533	7778
7547	7792
7561	7806
7575	7820
7589	7834
7603	7848
7617	7862
7631	7876
7645	7890

ITU-R 386-5 A3

Table 2-13: 8275 MHz to 8500 MHz (ITU-R 386-5 A3)

14 MHz Bandwidth

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
8293	8412
8307	8426
8321	8440
8335	8454
8349	8468
8363	8482

U.S.A.**FCC Part 101****Table 2-14: 5925 MHz to 6425 MHz (FCC Part 101)**

3.75 MHz Bandwidth		5 MHz Bandwidth		10 MHz Bandwidth		30 MHz Bandwidth	
Transmit (Receive) (MHz)	Receive (Transmit) (MHz)	Transmit (Receive) (MHz)	Receive (Transmit) (MHz)	Transmit (Receive) (MHz)	Receive (Transmit) (MHz)	Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
6111.364	6363.404	6110.75	6362.79	5935.32	6187.36	5945.20	6197.24
6116.305	6368.345	6115.69	6367.73	5945.20	6197.24	5974.85	6226.89
6121.247	6373.287	6120.63	6372.67	5955.08	6207.12	6004.50	6256.54
6126.189	6378.229	6125.57	6377.61	5964.97	6217.01	6034.15	6286.19
6131.130	6383.170	6130.51	6382.55	5974.85	6226.89	6063.80	6315.84
6136.072	6388.112	6135.45	6387.49	5984.73	6236.77	6093.45	6345.49
6141.014	6393.054	6140.40	6392.44	5994.62	6246.66	6123.10 ^b	6375.14 ^b
6145.955	6397.995	6145.34	6397.38	6004.50	6256.54	6152.75 ^b	6404.79 ^b
6150.897	6402.937	6150.28	6402.32	6014.38	6266.42		
6155.839	6407.879	6155.22	6407.26	6024.27	6276.31		
6160.780	6412.820	6160.16	6412.20	6034.15	6286.19		
6165.722	6417.762	6165.10	6417.14	6044.03	6296.07		
6175.000 ^a	n/a			6053.92	6305.96		
				6063.80	6315.84		
				6073.68	6325.72		
				6083.57	6335.61		
				6093.45	6345.49		
				6103.33	6355.37		
				6113.22 ^b	6365.26 ^b		
				6123.10 ^b	6375.14 ^b		
				6132.98 ^b	6385.02 ^b		
				6142.87 ^b	6394.91 ^b		
				6152.75 ^b	6404.79 ^b		
				6162.63 ^b	6414.67 ^b		

a. This frequency may be assigned for unpaired use.

b. Alternate channels. These channels are set aside for narrow bandwidth systems and should be used only if all other channels are blocked.

Table 2-15: 6525 MHz to 6875 MHz (FCC Part 101)

3.75 MHz Bandwidth		5 MHz Bandwidth		10 MHz Bandwidth	
Transmit (Receive) (MHz)	Receive (Transmit) (MHz)	Transmit (Receive) (MHz)	Receive (Transmit) (MHz)	Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
6545.625 ^a	6715.625 ^a	6545 ^a	6715 ^a	6545	6715
6550.625	6730.625	6550	6730	6555	6725
6555.625 ^a	6725.625 ^a	6555 ^a	6725 ^a	6565	6735
6560.625	6740.625	6560	6740	6585	6745
6565.625	6735.625	6565	6735	6595	6755
6585.625	6745.625	6585	6745	6605	6765
6590.625	6750.625	6590	6750	6615	6775
6595.625	6755.625	6595	6755	6625	6785
6600.625	6760.625	6600	6760	6635	6795
6605.625	6765.625	6605	6765	6645	6805
6610.625	6770.625	6610	6770	6655	6815
6615.625	6775.625	6615	6775	6665	6825
6620.625	6780.625	6620	6780	6675	6835
6625.625	6785.625	6625	6785	6685	6845
6630.625	6790.625	6630	6790	6695	6855
6635.625	6795.625	6635	6795	6705	6865
6640.625	6800.625	6640	6800	6535 ^b	6575 ^b
6645.625	6805.625	6645	6805		
6650.625	6810.625	6650	6810		
6655.625	6815.625	6655	6815		
6660.625	6820.625	6660	6820		
6665.625	6825.625	6665	6825		
6670.625	6830.625	6670	6830		
6675.625	6835.625	6675	6835		
6680.625	6840.625	6680	6840		
6685.625	6845.625	6685	6845		
6690.625	6850.625	6690	6850		
6695.625	6855.625	6695	6855		
6700.625	6860.625	6700	6860		
6705.625	6865.625	6705	6865		
6710.625 ^a	6720.625 ^a	6710 ^a	6720 ^a		

a. These frequencies may be assigned for unpaired use.

b. Available only for emergency restoration, maintenance bypass, or other temporary fixed purposes. Such uses are authorized on a noninterference basis to other frequencies in this band. Interference analysis required by § 101.105 does not apply to this frequency pair.

Table 2-16: 10550 MHz to 10680 MHz (FCC Part 101)**3.75 MHz Bandwidth**

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
10553.125	10618.125
10558.125	10623.125
10563.125	10628.125
10568.125	10633.125
10573.125	10638.125
10578.125	10643.125
10583.125	10648.125
10588.125	10653.125
10593.125	10658.125
10598.125	10663.125
10603.125	10668.125

5 MHz Bandwidth

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
10552.5	10617.5
10557.5	10622.5
10562.5	10627.5
10567.5 ^a	10632.5 ^a
10572.5 ^a	10637.5 ^a
10577.5 ^a	10642.5 ^a
10582.5 ^a	10647.5 ^a
10587.5	10652.5
10592.5	10657.5
10597.5	10662.5
10602.5	10667.5

- a. These frequencies are also available for DEMS stations licensed, in operation, or applied for prior to July 15, 1993.

Table 2-17: 10700 MHz to 11700 MHz (FCC Part 101)**3.75 MHz Bandwidth**

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
11133.125	11623.125
11138.125	11628.125
11143.125	11633.125
11148.125	11638.125
11153.125	11643.125
11158.125	11648.125
11163.125	11653.125
11168.125	11658.125
11173.125	11663.125
11178.125	11668.125
11183.125	11683.125
11188.125	11688.125
11193.125	11693.125
11198.125	11698.125

5 MHz Bandwidth

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
11132.5	11622.5
11137.5	11627.5
11142.5	11632.5
11147.5	11637.5
11152.5	11642.5
11157.5	11647.5
11162.5	11652.5
11167.5	11657.5
11172.5	11662.5
11177.5	11667.5
11182.5	11682.5
11187.5	11687.5
11192.5	11692.5
11197.5	11697.5

Table 2-18: 10700 MHz to 11700 MHz (FCC Part 101)**10 MHz Bandwidth**

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)	Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
10705	11205	10965	11455
10715	11215	10975	11465
10725 ^a	11675 ^b	10985	11475
10735	11225	10995	11485
10745	11235	11005	11495
10755	11245	11015	11505
10765	11255	11025	11515
10775	11265	11035	11525
10785	11275	11045	11535
10795	11285	11055	11545
10805	11295	11065	11555
10815	11305	11075	11565
10825	11315	11085	11575
10835	11325	11095	11585
10845	11335	11105	11595
10855	11345	11115	11605
10865	11355	11125	11615
10875	11365	11135 ^b	11625 ^a
10885	11375	11145 ^b	11635 ^b
10895	11385	11155 ^b	11645 ^b
10905	11395	11165 ^b	11655 ^b
10915	11405	11175	11665 ^b
10925	11415	11185	11685 ^b
10935	11425	11195	11695 ^b
10945	11435		
10955	11445		

a. These frequencies may be assigned for unpaired use.

b. Alternate channels. These channels are set aside for narrow bandwidth systems and should be used only if all other channels are blocked.

Table 2-19: 10700 MHz to 11700 MHz (FCC Part 101)**40 MHz Bandwidth**

Transmit (Receive) (MHz)	Receive (Transmit) (MHz)
10735	11225
10775	11265
10815	11305
10855	11345
10895	11385
10935	11425
10975	11465
11015	11505
11055	11545
11095	11585
11135 ^a	11625
11175	11665

- a. *Alternate channels. These channels are set aside for narrow bandwidth systems and should be used only if all other channels are blocked.*
- b. *In congested areas where 40 MHz channels block most 30 MHz channels, radios authorized for 30 MHz bandwidths may use the 40 MHz channels. In uncongested areas, 30 MHz channels should be used.*

Regulatory Information Licensed Part 101 Service

Table 2-20: FCC Form 601

Product Name	Freq Tolerance %	Max Output Pwr ^a (Not required on Form 601)	EIRP ^b	Emission Designator	Baseband Digital Rate (kbps)	Digital Modulation Type	Tx Manufacturer	Equipment ID	ATPC (Y/N) ^c
	Item 6		Item 7	Item 8	Item 9	Item 10	Item 11	Item 12	Item 13
8DS1	0.0003	-	-	3M75D7W	13,800	32 QAM	Harris Corp.	HRS-CX-06G08D1	-
16DS1	0.0003	-	-	5M0D7W	27,100	128 QAM	Harris Corp.	HRS-CX-06G16D1	-
28DS1	0.0003	-	-	10M0D7W	47,000	64 QAM	Harris Corp.	HRS-CX-06G28D1	-
155M	0.0003	-	-	30M0D7W	172,560	128 TCM	Harris Corp.	HRS-CX-06G155M	-
4DS3	0.0003	-	-	30M0D7W	197,419	256 TCM	Harris Corp.	HRS-CX-06G4DS3	-
16DS1 High Gain	0.0003	-	-	5M0D7W	28,614	128 TCM	Harris Corp.	HRS-CX-06G16D1-H	-
28 DS1 High Gain	0.0003	-	-	10M0D7W	50,282	64 TCM	Harris Corp.	HRS-CX-06G28D1-H	-
155 M High Gain	0.0003	-	-	30M0D7W	172,560	128 TCM	Harris Corp.	HRS-CX-06G155M-H	-
4DS3 High Gain	0.0003	-	-	30M0D7W	197,419	256 TCM	Harris Corp.	HRS-CX-06G4DS3-H	-
8DS1	0.0003	-	-	3M75D7W	13,800	32 QAM	Harris Corp.	HRS-CX-07G08D1	-
16DS1	0.0003	-	-	5M0D7W	27,100	128 QAM	Harris Corp.	HRS-CX-07G16D1	-
28DS1	0.0003	-	-	10M0D7W	47,000	64 QAM	Harris Corp.	HRS-CX-07G28D1	-
155M	0.0003	-	-	30M0D7W	172,560	128 TCM	Harris Corp.	HRS-CX-07G155M	-
4DS3	0.0003	-	-	30M0D7W	197,419	256 TCM	Harris Corp.	HRS-CX-07G4DS3	-
16DS1 High Gain	0.0003	-	-	5M0D7W	28,614	128 TCM	Harris Corp.	HRS-CX-07G16D1-H	-
28 DS1 High Gain	0.0003	-	-	10M0D7W	50,282	64 TCM	Harris Corp.	HRS-CX-07G28D1-H	-
155 M High Gain	0.0003	-	-	30M0D7W	172,560	128 TCM	Harris Corp.	HRS-CX-07G155M-H	-
4DS3 High Gain	0.0003	-	-	30M0D7W	197,419	256 TCM	Harris Corp.	HRS-CX-07G4DS3-H	-

Constellation 6 GHz

Constellation 7/8 GHz

a. Maximum Output Power (FCC Form 415 - ~~Obsolete 2001~~) was replaced by Effective Isotropic Radiated Power (EIRP) radiated off the transmitting antenna (FCC Form 601).

b. The EIRP value is obtained from the Frequency Coordination data or Link Calculations.

c. Constellation Transmitters are equipped with a software controlled ATPC feature. If ATPC is required for the path enter Yes (ATPC enabled). If not required, enter No (ATPC disabled).

Table 2-20: FCC Form 601 continued

Product Name	Freq Tolerance %	Max Output Pwr ^a (Not required on Form 601)	EIRP ^b	Emission Designator	Baseband Digital Rate (kbps)	Digital Modulation Type	Tx Manufacturer	Equipment ID	ATPC (Y/N) ^c
	Item 6		Item 7	Item 8	Item 9	Item 10	Item 11	Item 12	Item 13
Constellation 10 GHz	8DS1	-	-	3M75D7W	13,800	32 QAM	Harris Corp.	HRS-CX-10G08D1	-
	16DS1	-	-	5M0D7W	27,100	128 QAM	Harris Corp.	HRS-CX-10G16D1	-
	16DS1 High Gain	-	-	5M0D7W	28,614	128 TCM	Harris Corp.	HRS-CX-10G16D1-H	-
Constellation 11 GHz	8DS1	-	-	3M75D7W	13,800	32 QAM	Harris Corp.	HRS-CX-11G08D1	
	16DS1	-	-	5M0D7W	27,100	128 QAM	Harris Corp.	HRS-CX-11G16D1	
	28DS1	-	-	10M0D7W	47,000	64 QAM	Harris Corp.	HRS-CX-11G28D1	
	155M	-	-	30M0D7W	172,560	128 TCM	Harris Corp.	HRS-CX-11G155M	
	4DS3	-	-	30M0D7W	197,419	256 TCM	Harris Corp.	HRS-CX-11G4DS3	
	16DS1 High Gain	-	-	5M0D7W	28,614	128 TCM	Harris Corp.	HRS-CX-11G16D1-H	
Constellation 12 GHz	28 DS1 High Gain	-	-	10M0D7W	50,282	64 TCM	Harris Corp.	HRS-CX-11G28D1-H	
	155 M High Gain	-	-	30M0D7W	172,560	128 TCM	Harris Corp.	HRS-CX-11G155M-H	
	4DS3 High Gain	-	-	30M0D7W	197,419	256 TCM	Harris Corp.	HRS-CX-11G4DS3-H	

a. Maximum Output Power (FCC Form 415 - Obsolete 2001) was replaced by Effective Isotropic Radiated Power (EIRP) radiated off the transmitting antenna (FCC Form 601).

b. The EIRP value is obtained from the Frequency Coordination data or Link Calculations.

c. Constellation Transmitters are equipped with a software controlled ATPC feature. If ATPC is required for the path enter Yes (ATPC enabled). If not required, enter No (ATPC disabled).

CONSTELLATION RADIO CONFIGURATIONS

The Constellation Radio

The Constellation Radio is a scalable narrow, medium, and high capacity digital radio. The radios are available in 6, 7, 8, 10, and 11 GHz frequency bands.

The Constellation platform includes both terminal and repeater configurations. Repeater configuration radio supports an add/drop of up to 16 DS1 signals from each direction. The DS1 signals must be dropped in groups of four.

The high-capacity Constellation radio is not available in a repeater configuration, only in a back-to-back configuration.

Low/Medium Capacity Radio

- 8, 16, 28* DS1 (terminal and repeater)
- 1 DS3 (available in back-to-back, but not in repeater configuration)

** Supports a maximum of 16 DS1 add/drop signals from each direction. If more than 16 DS1 signals are to be dropped, then a back-to-back configuration is required.*

Upgradability

Radios can be upgraded from medium capacity to high capacity.

High Capacity Radio

- 4 DS3 with add-drop capabilities on 3 channels
- 3 DS3 with add-drop capabilities and wayside
- 3 DS3 with 1 DS1 wayside
- 2 DS3 + 28 DS1 with 1 DS1 wayside
- OC-3 with 1 DS1 wayside
- STM-1/STS-3 with 1 DS1 or E1 wayside

3xDS3/4xDS3 and 155 Optical/Electrical Configurations


- To minimize jitter accumulation in a 3xDS3 system, back-to back terminals at sites where no DS3 is required should use HLM-155 units.
- The 3xDS3 unit is compatible with the HLM-155 unit. However, the 3xDS3 unit is not compatible with OEM SONET-DS3 multiplexers.
- The HLM-3xDS3 unit and the HLM-155 operate only in a terminal radio.
- The HLM-155 unit can be either protected or unprotected in hot standby Constellation terminals, depending on whether the OEM multiplexer is protected.
- At back-to-back terminals, when the receive DS3 signals are passed directly from radio to radio without passing through external terminating equipment, in a 3xDS3 unit the maximum number of hops is limited to 15 because of the accumulation of jitter. After 15 hops, the DS3 must be terminated. The 4xDS3 unit allows for an unlimited number of hops.
- When the 3xDS3/4xDS3 system is configured in an add-drop mode, T1 signals may pass through no more than 8 consecutive add-drop sites before being terminated. In the 4xDS3 unit, only DS3 channels 1, 2, or 3 can be selected for a limited add-drop configuration.

It is recommended that if you need access to a T1 at sequential sites that you alternate which T2 you drop to avoid accumulated jitter on the undropped T2s. This also will eliminate the need to have an extra M12. The DS1 signals have to be completely dropped every 8 hops in order to eliminate the accumulated jitter.



When connecting an OEM M1-3 multiplexer to a Constellation 3xDS3 or 4xDS3 radio, DS3 errors might be observed for shorter cable lengths. This can be caused by reflections in the cable connecting the equipment. Installing a 3dB attenuator in series with the DS3 cable when the length is less than 10 feet may be required. For additional information go to the Harris MCD Premier website at <https://premier.harris.com/microwave>.

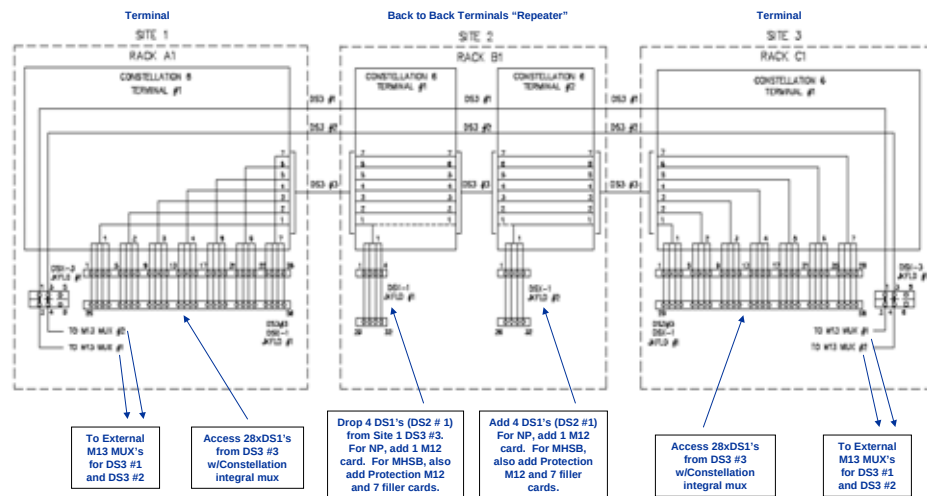Figure 3-1: Traffic Plan Example for 3xDS3 (2xDS3+28 DS1)



M12 Cards required only when DS1's are added or dropped!

No external M13 mux required!

A different DS3 can be selected from site to site!

Similarly, 4xDS3 provides a 3xDS3 + 28xDS1 interface, with the first 3xDS3's available for DS1 access.

Network Management and Control

Network Management Interfaces

The Constellation Radio offers versatile open network management with an embedded SNMP agent and compatibility with Harris' NetBoss, StarView, or FarScan network management platforms.

User-Friendly Radio Interface Tool

The Constellation also supports a Keypad interface. The Keypad can be used for local (per hop) and remote monitoring of alarms and statuses for any radio in a contiguous network, and for provisioning the network elements. The Keypad allows the customer to quickly configure a system or diagnose a trouble on a hop.

In place of a Keypad, the customer can connect a terminal (VT100-compatible) or a laptop with terminal emulator software to communicate with the Constellation radio.

External Alarm/Control

Eight alarm dry-contact relay outputs (Keypad programmable) and eight opto-isolated alarm inputs are provided for customer-configured alarms.

Antenna Coupling Unit (ACU)

The ACU options offer a wide variety of optimal RF transmission architectures as well as expansion ports that accommodate additional radios on existing antenna feed systems. Refer to [Chapter 6](#) for more information.

Configurations

Multiplexer

Figure 3-2: Multiplexer configuration for a radio terminal

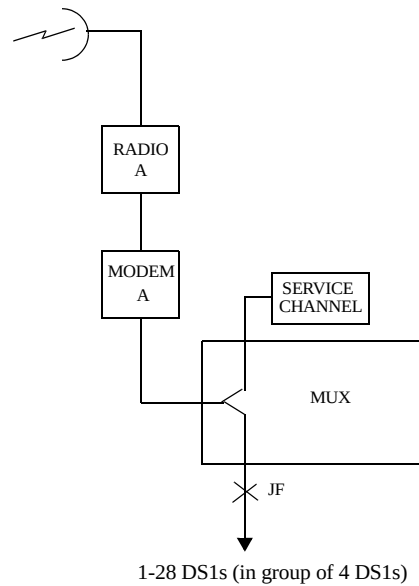


Figure 3-3: Multiplexer configuration for a radio-to-radio repeater


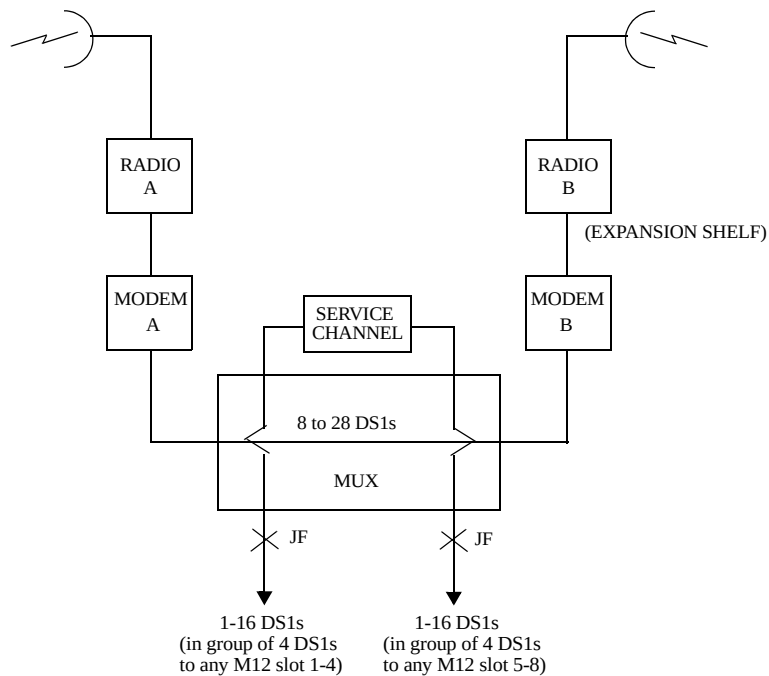


Figure 3-4: Multiplexer configuration for a dual radio terminal

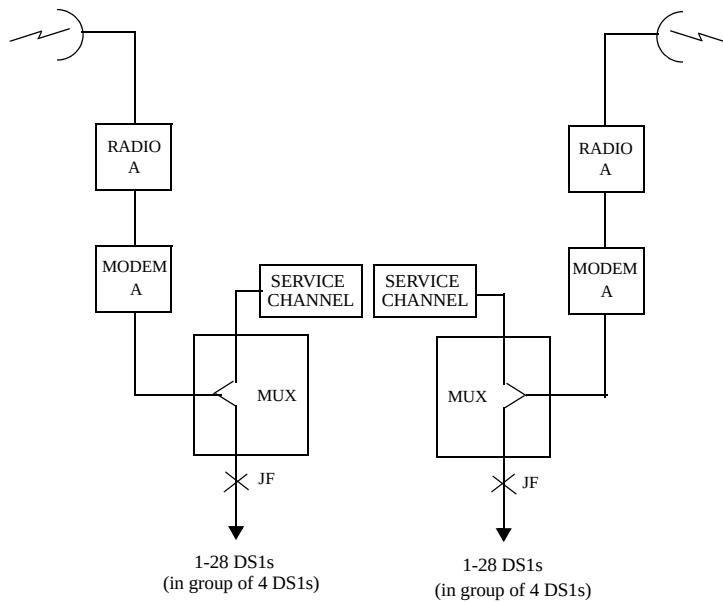

Constellation DS3 Interface

Figure 3-5: Constellation radio terminal, DS3 interface

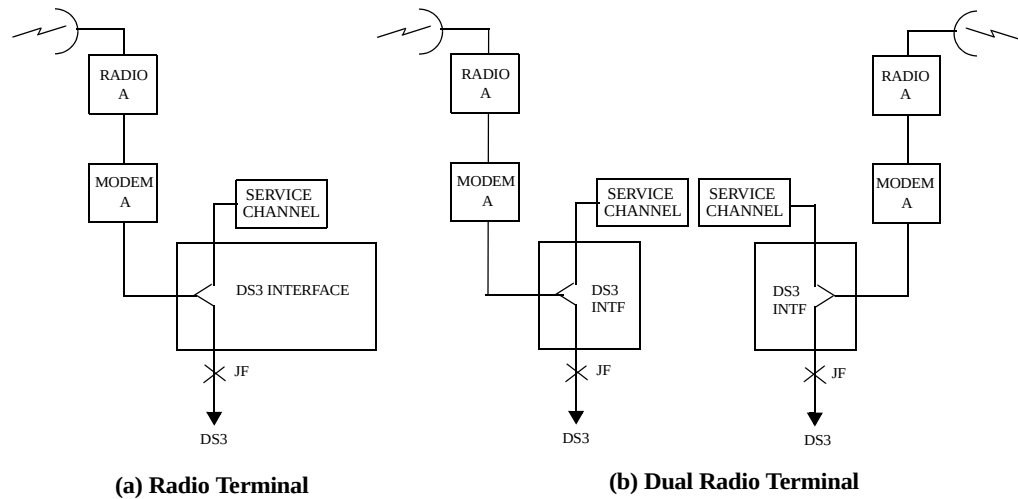


Figure 3-6: 28 DS1 to DS3 application

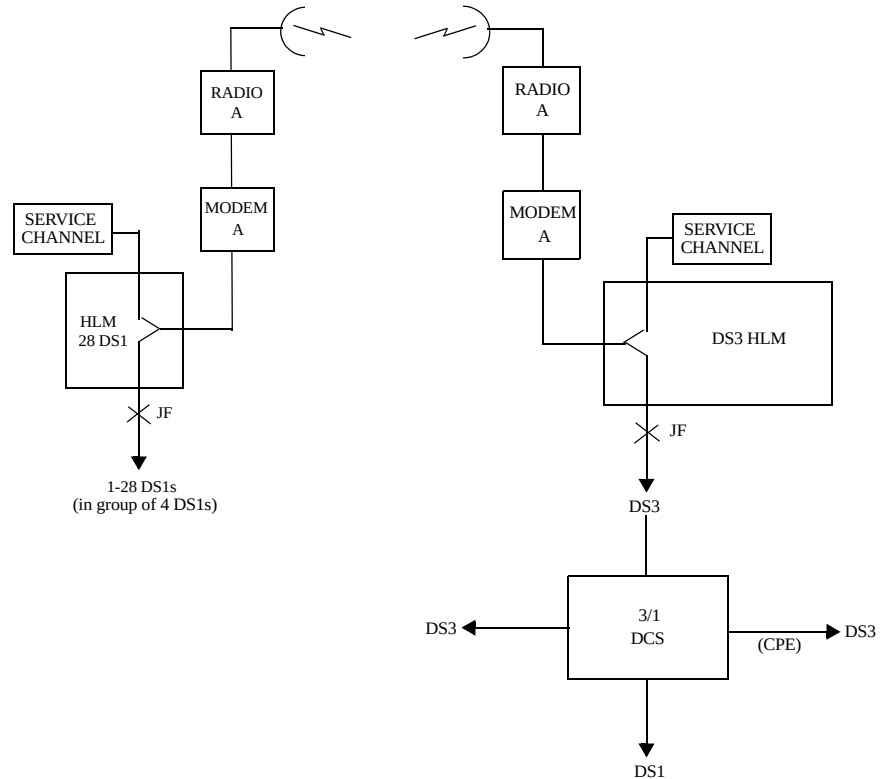
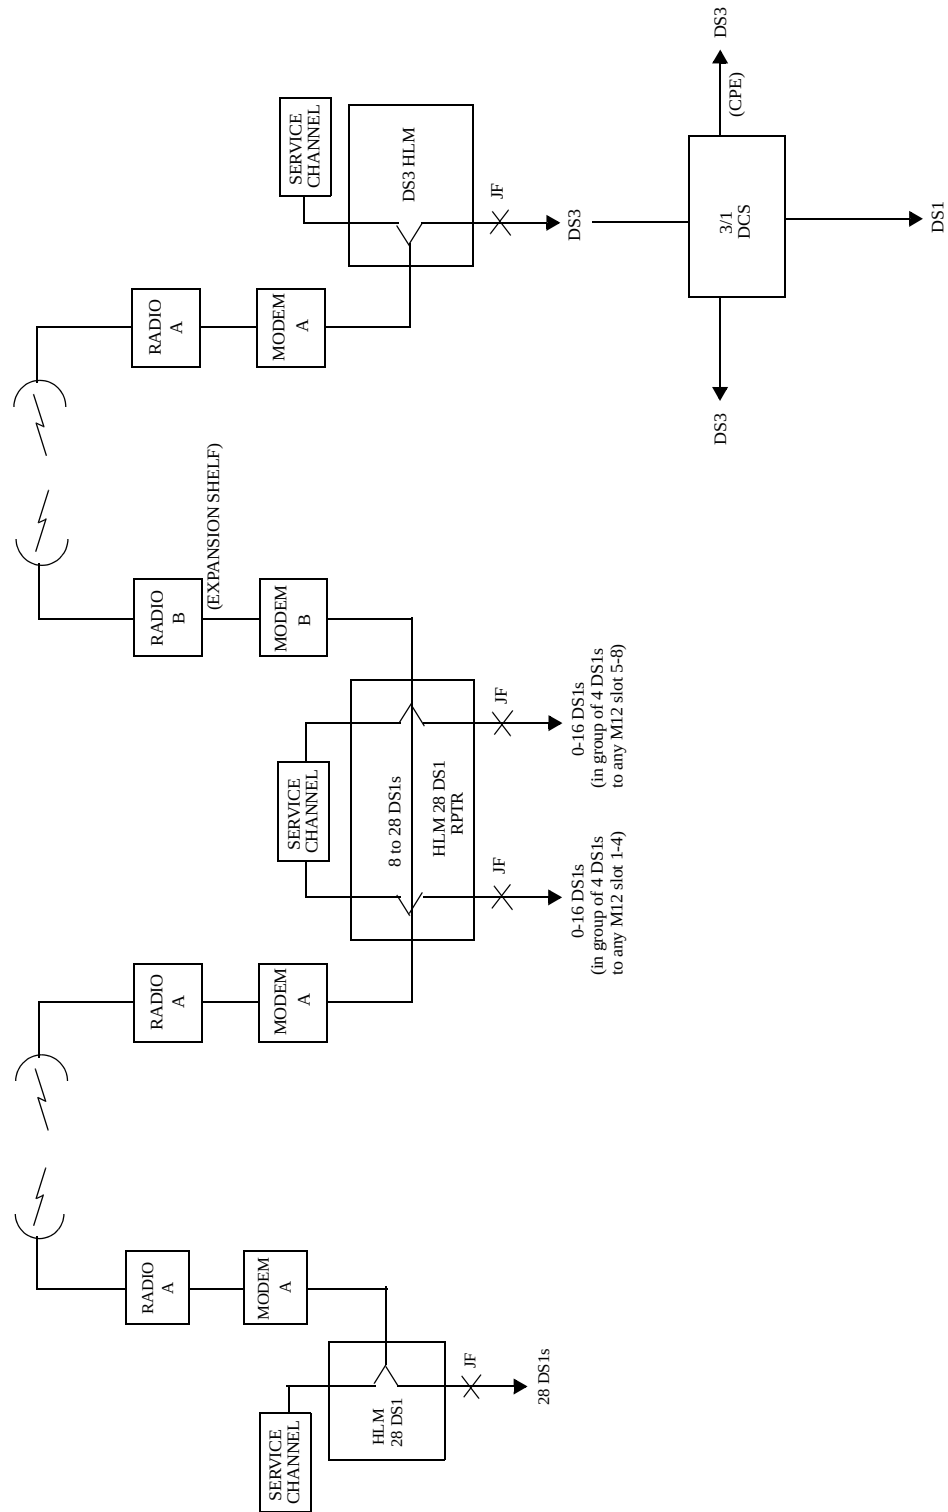


Figure 3-7: 28 DS1 to repeater to DS3 application

Constellation 4xDS3/3xDS3 Interface

Figure 3-8: 4xDS3 to 4xDS3 configuration

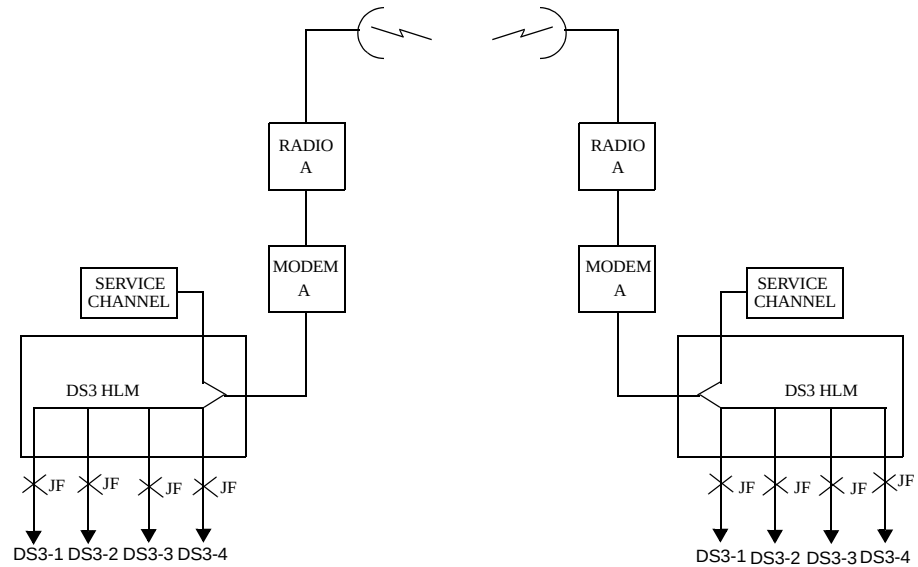


Figure 3-9: 3xDS3 to 3xDS3 configuration

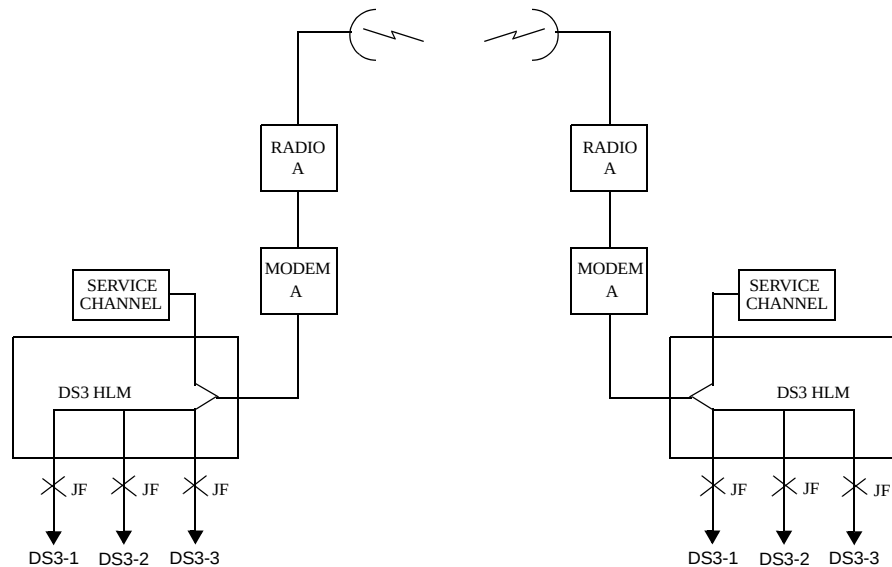


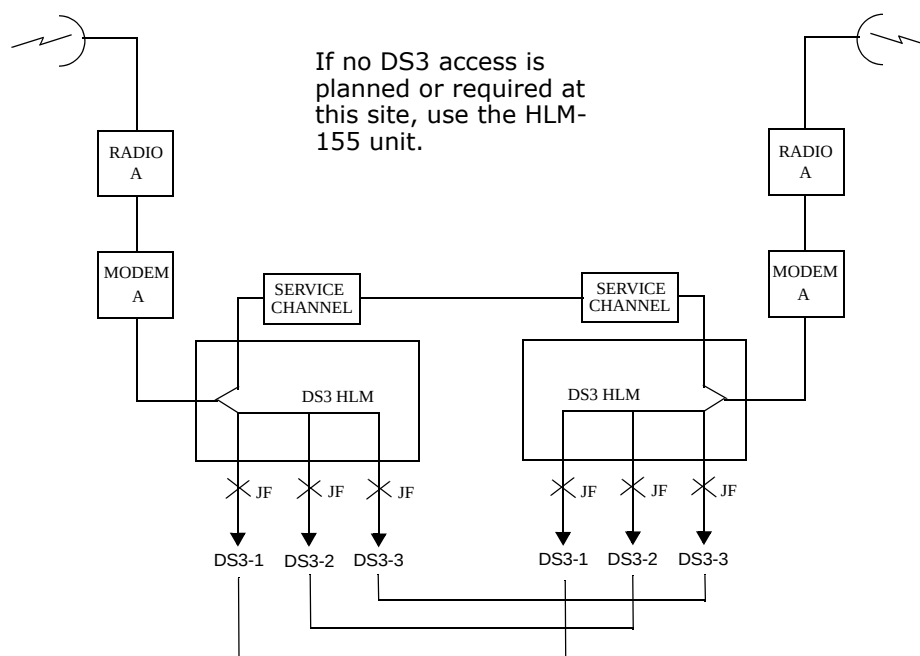
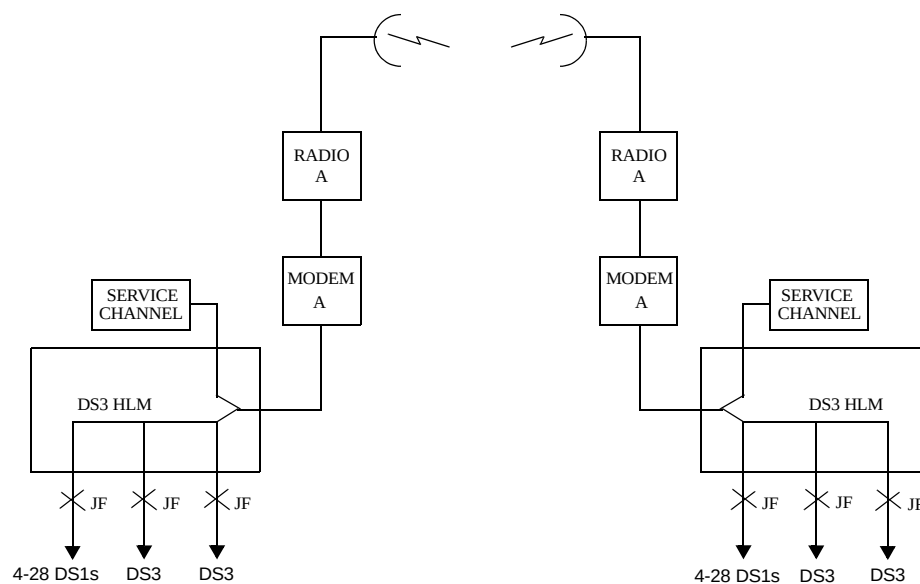
Figure 3-10: 3xDS3 to 3xDS3 back-to-back terminals**Figure 3-11: 3xDS3 configured as a 2xDS3 + 28DS1 configuration**

Figure 3-12: 3xDS3 configured as 2xDS3 + 28DS1 back-to-back terminals


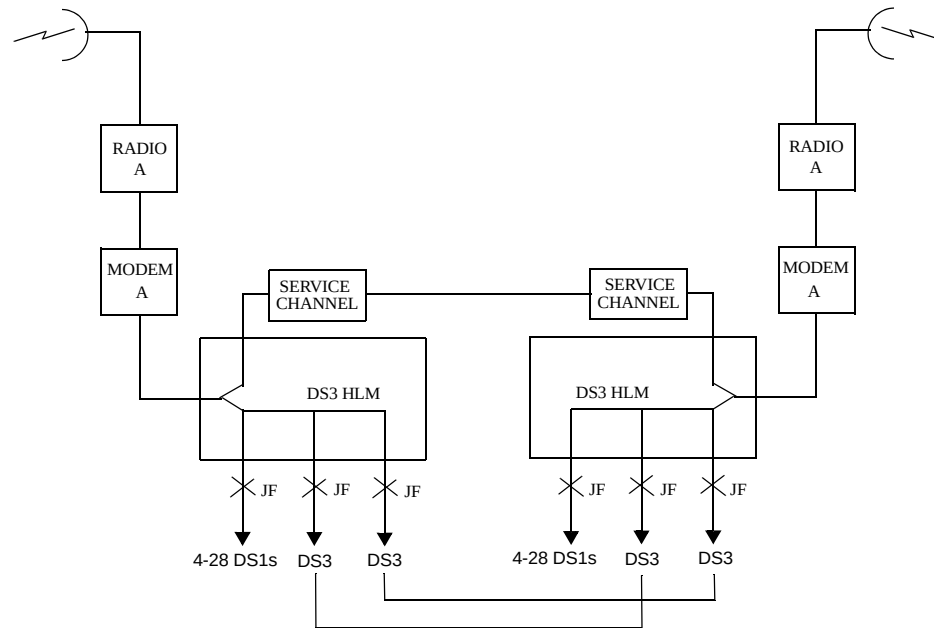
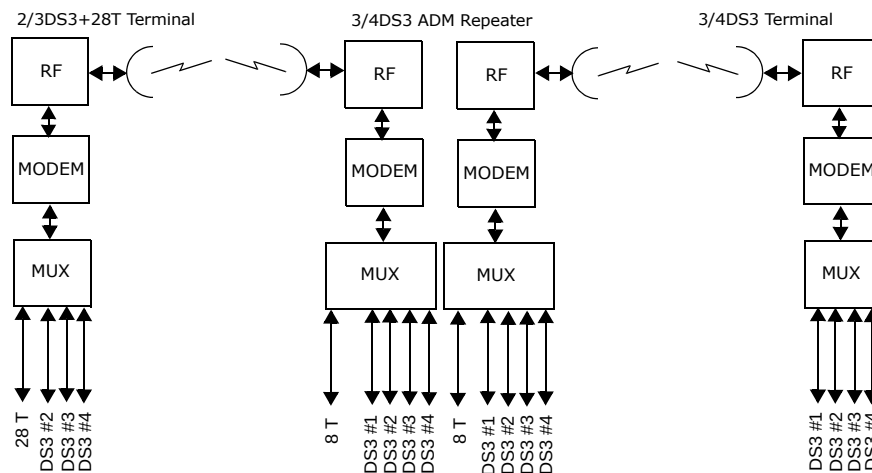


Figure 3-13: 3(4)xDS3 configured as 2(3)xDS3 + 28DS1 terminal, ADM repeater, and 3(4)xDS3 terminal

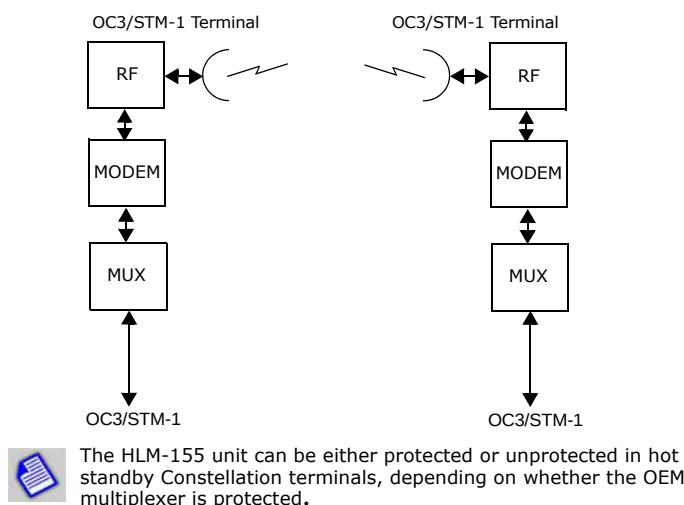

When ADM is used, non-dropped DS1 channels pass between radios on the DS3 channel. The added DS1s are mapped into the DS3 entering the radio. 3/4DS3 + ADM should not be used at a terminal site without a DS3 input on the ADM channel. At these terminal sites, use 2/3 DS3 + 28T. If not all 28T are needed at the terminal site, sub-equip the M12s.

Figure 3-14: OC-3/STM-1 to OC-3/STM-1 Configuration

Radio Synchronization Configuration

The High Level Mux (HLM) cards for 8, 16, and 28 DS1 radios, as available in a repeater configuration, can be set for either Through timing or Source timing.

Through timing mode minimizes the jitter accumulation on DS1s directly passing through multiple repeaters.

In a loop system with all repeaters, at least one repeater needs to be set for Source timing. In large systems, the HLM cards in repeater configurations need to be set for Source timing after 15 consecutive repeaters to clear the accumulated jitter.

The HLM cards in a terminal configuration are always set for Source timing.

If Source timing is selected, the Service Channel must be configured with Local Off Hook enabled.

TECHNICAL SPECIFICATIONS

Power Requirements (Top of Rack)

Power Consumption

Configuration, Terminal	Power Consumption* (watts)			
	6, 7/8 GHz		10/11 GHz	
	24 V	48 V	24 V	48 V
Nonprotected	205	180	225	215
Nonprotected/space diversity Rx	315	270	360	335
Fully protected	405	360	450	425

**Notes*

1. Measured values.
2. 8/16/28 DS1 repeater power consumption = 2 x terminal consumption, less 5%.
3. Add 3.5 W for each M12 Unit.
4. DS3, 3DS3, 4DS3 and 155 Optical/Electrical use back-to-back terminals.
5. For high system gain options, add 4W per transmitter.

Power Source


Power Source Voltage

System DC power input	Wide mouth auto polarity directing 22 Vdc to 60 Vdc at top of rack (TOR)
Input noise level and ripple tolerated	100 mV RMS in a 3-kHz bandwidth, 100 kHz to 20 MHz
Protection	Fused

Power Source Noise

The battery noise level must comply with [Figure 4-1](#).

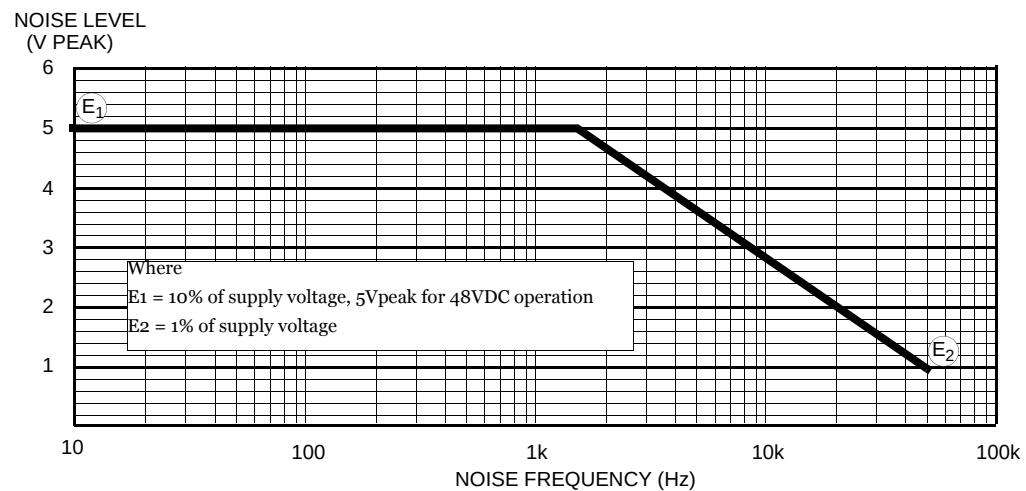Figure 4-1: Battery voltage noise limit



Built-in Radio Fuse Panel

Constellation radio has a built-in radio fuse panel whose power rating is designed to provide individual fused power only to the various assemblies in the radio equipment shelf. Harris recommends that external fuse panel be used to provide fused power to all other equipment on the same radio rack.

Circuit Breakers



The values in [Table 4-1](#) are for the Constellation radio only.

Table 4-1: Recommended circuit breaker sizes

Configuration	6, 7/8 GHz		10/11 GHz	
	24 V	48 V	24 V	48 V
Fully protected	25 A	15 A	30 A	15 A

RF Performance Specifications

[Table 4-2](#) shows values measured at the Top of Rack Antenna Port, guaranteed at 25°C for nonprotected systems.

See the table below for additional ACU (Antenna Coupling Unit) loss:

Table 4-2: Additional ACU loss

Configuration	Band (GHz)	Additional ACU Loss (dB)
Protected transmit pair	6, 7/8, and 11	0.4
Protected receive pair	6 and 11	1.0
• 8/16/28 DS1	7/8	0.9
• 155 Mbit/s, 3DS3, 4DS3	7/8	0.8

Table 4-3: RF performance specifications

Band (GHz)	Capacity	Config- uration ^b	Tx Pwr Output (dBm)	Receive Threshold		System Gain ^a	
				10 ⁻³ BER (dBm)	10 ⁻⁶ BER (dBm)	10 ⁻³ BER (dB)	10 ⁻⁶ BER (dB)
5.9 to 6.9 ^c	8 DS1	NP	29.5	-82.5	-81.0	112.0	110.5
		NP/SD	29.5	-82.5	-81.0	112.0	110.5
		HS ^d	29.1	-81.5	-80.0	110.6	109.1
		HS/SD	29.1	-82.5	-81.0	111.6	110.1
		ST/SD	29.1	-82.5	-81.0	111.6	110.1
		FD	29.5	-82.5	-81.0	112.0	110.5
		FD/SD	29.5	-82.5	-81.0	112.0	110.5
	16 DS1	NP	28.5	-76.0	-74.5	104.5	103.0
		NP/SD	28.5	-76.0	-74.5	104.5	103.0
		HS ^d	28.1	-75.0	-73.5	103.1	101.6
		HS/SD	28.1	-76.0	-74.5	104.1	102.6
		ST/SD	28.1	-76.0	-74.5	104.1	102.6
		FD	28.5	-76.0	-74.5	104.5	103.0
		FD/SD	28.5	-76.0	-74.5	104.5	103.0
	28 DS1/DS3	NP	29.0	-76.0	-74.5	105.0	103.5
		NP/SD	29.0	-76.0	-74.5	105.0	103.5
		HS ^d	28.6	-75.0	-73.5	103.6	102.1
		HS/SD	28.6	-76.0	-74.5	104.6	103.1
		ST/SD	28.6	-76.0	-74.5	104.6	103.1
		FD	29.0	-76.0	-74.5	105.0	103.5
		FD/SD	29.0	-76.0	-74.5	105.0	103.5
	16 DS1 High Gain	NP	29.3	-78.0	-77.0	107.3	106.3
		NP/SD	29.3	-78.0	-77.0	107.3	106.3
		HS ^d	28.9	-77.0	-76.0	105.9	104.9
		HS/SD	28.9	-78.0	-77.0	106.9	105.9
		ST/SD	28.9	-78.0	-77.0	106.9	105.9
		FD	29.3	-78.0	-77.0	107.3	106.3
		FD/SD	29.3	-78.0	-77.0	107.3	106.3
	28 DS1/DS3 High Gain	NP	30.3	-78.5	-77.5	108.8	107.8
		NP/SD	30.3	-78.5	-77.5	108.8	107.8
		HS ^d	29.9	-77.5	-76.5	107.4	106.4
		HS/SD	29.9	-78.5	-77.5	108.4	107.4
		ST/SD	29.9	-78.5	-77.5	108.4	107.4
		FD	30.3	-78.5	-77.5	108.8	107.8
		FD/SD	30.3	-78.5	-77.5	108.8	107.8

Table 4-3: RF performance specifications (Continued)

Band (GHz)	Capacity	Config- uration ^b	Tx Pwr Output (dBm)	Receive Threshold		System Gain ^a	
				10 ⁻³ BER (dBm)	10 ⁻⁶ BER (dBm)	10 ⁻³ BER (dB)	10 ⁻⁶ BER (dB)
5.9 to 6.9 ^c	155 Mbps opt./elec., 3xDS3 Standard Gain	NP	29.0	-72.5	-71.0	101.5	100.0
		NP/SD	29.0	-72.5	-71.0	101.5	100.0
		HS ^d	28.6	-71.5	-70.0	100.1	98.6
		HS/SD	28.6	-72.5	-71.0	101.1	99.6
		ST/SD	28.6	-72.5	-71.0	101.1	99.6
		FD	29.0	-72.5	-71.0	101.5	100.0
		FD/SD	29.0	-72.5	-71.0	101.5	100.0
	155 Mbps opt./elec., 3xDS3 High Gain	NP	31.5	-72.5	-71.0	104.0	102.5
		NP/SD	31.5	-72.5	-71.0	104.0	102.5
		HS ^d	31.1	-71.5	-70.0	102.6	101.1
		HS/SD	31.1	-72.5	-71.0	103.6	102.1
		ST/SD	31.1	-72.5	-71.0	103.6	102.1
		FD	31.5	-72.5	-71.0	104.0	102.5
		FD/SD	31.5	-72.5	-71.0	104.0	102.5
	4xDS3 Standard Gain	NP	29.0	-69.0	-68.0	98.0	97.0
		NP/SD	29.0	-69.0	-68.0	98.0	97.0
		HS ^d	28.6	-68.0	-67.0	96.6	95.6
		HS/SD	28.6	-69.0	-68.0	97.6	96.6
		ST/SD	28.6	-69.0	-68.0	97.6	96.6
		FD	29.0	-69.0	-69.0	98.0	97.0
		FD/SD	29.0	-69.0	-68.0	98.0	97.0
	4xDS3 High Gain	NP	31.0	-69.0	-68.0	100.0	99.0
		NP/SD	31.0	-69.0	-68.0	100.0	99.0
		HS ^d	30.6	-68.0	-67.0	98.6	97.6
		HS/SD	30.6	-69.0	-68.0	99.6	98.6
		ST/SD	30.6	-69.0	-68.0	99.6	98.6
		FD	31.0	-69.0	-68.0	100.0	99.0
		FD/SD	31.0	-69.0	-68.0	100.0	99.0

Table 4-3: RF performance specifications (Continued)

Band (GHz)	Capacity	Config- uration ^b	Tx Pwr Output (dBm)	Receive Threshold		System Gain ^a	
				10 ⁻³ BER (dBm)	10 ⁻⁶ BER (dBm)	10 ⁻³ BER (dB)	10 ⁻⁶ BER (dB)
7 to 8	8 DS1	NP	27.5	-81.5	-80.0	109.0	107.5
		NP/SD	27.5	-81.5	-80.0	109.0	107.5
		HS ^d	27.1	-80.6	-79.1	107.7	106.2
		HS/SD	27.1	-81.5	-80.0	108.6	107.1
		ST/SD	27.1	-81.5	-80.0	108.6	107.1
		FD	27.5	-81.5	-80.0	109.0	107.5
		FD/SD	27.5	-81.5	-80.0	109.0	107.5
	16 DS1	NP	26.5	-75.0	-73.5	101.5	100.0
		NP/SD	26.5	-75.0	-73.5	101.5	100.0
		HS ^d	26.1	-74.1	-72.6	100.2	98.7
		HS/SD	26.1	-75.0	-73.5	101.1	99.6
		ST/SD	26.1	-75.0	-73.5	101.1	99.6
		FD	26.5	-75.0	-73.5	101.5	100.0
		FD/SD	26.5	-75.0	-73.5	101.5	100.0
	28 DS1/DS3	NP	27.0	-75.0	-73.5	102.0	100.5
		NP/SD	27.0	-75.0	-73.5	102.0	100.5
		HS ^d	26.6	-74.1	-72.6	100.7	99.2
		HS/SD	26.6	-75.0	-73.5	101.6	100.1
		ST/SD	26.6	-75.0	-73.5	101.6	100.1
		FD	27.0	-75.0	-73.5	102.0	100.5
		FD/SD	27.0	-75.0	-73.5	102.0	100.5
	16 DS1 High Gain	NP	27.0	-77.0	-76.0	104.0	103.0
		NP/SD	27.0	-77.0	-76.0	104.0	103.0
		HS ^d	26.6	-76.1	-75.1	102.7	101.7
		HS/SD	26.6	-77.0	-76.0	103.6	102.6
		ST/SD	26.6	-77.0	-76.0	103.6	102.6
		FD	27.0	-77.0	-76.0	104.0	103.0
		FD/SD	27.0	-77.0	-76.0	104.0	103.0
	28 DS1/DS3 High Gain	NP	28.0	-77.5	-76.5	105.5	104.5
		NP/SD	28.0	-77.5	-76.5	105.5	104.5
		HS ^d	27.6	-76.6	-75.6	104.2	103.2
		HS/SD	27.6	-77.5	-76.5	105.1	104.1
		ST/SD	27.6	-77.5	-76.5	105.1	104.1
		FD	28.0	-77.5	-76.5	105.5	104.5
		FD/SD	28.0	-77.5	-76.5	105.5	104.5

Table 4-3: RF performance specifications (Continued)

Band (GHz)	Capacity	Config- uration ^b	Tx Pwr Output (dBm)	Receive Threshold		System Gain ^a	
				10 ⁻³ BER (dBm)	10 ⁻⁶ BER (dBm)	10 ⁻³ BER (dB)	10 ⁻⁶ BER (dB)
7 to 8	OC-3/3xDS3 Standard Gain	NP	27.5	-72.0	-70.5	99.5	98.0
		NP/SD	27.5	-72.0	-70.5	99.5	98.0
		HS ^d	27.1	-71.2	-69.7	98.3	96.8
		HS/SD	27.1	-72.0	-70.5	99.1	97.6
		ST/SD	27.1	-72.0	-70.5	99.1	97.6
		FD	27.5	-27.0	-20.5	99.5	98.0
		FD/SD	27.5	-72.0	-70.5	99.5	98.0
	OC-3/3xDS3 High Gain	NP	30.0	-72.0	-70.5	102.0	100.5
		NP/SD	30.0	-72.0	-70.5	102.0	100.5
		HS ^d	29.6	-71.2	-69.7	100.8	99.3
		HS/SD	29.6	-72.0	-70.5	101.6	100.1
		ST/SD	29.6	-72.0	-70.5	101.6	100.1
		FD	30.0	-72.0	-70.5	102.0	100.5
		FD/SD	30.0	-72.0	-70.5	102.0	100.5
	4xDS3 Standard Gain	NP	27.5	-68.5	-67.5	96.0	95.0
		NP/SD	27.5	-68.5	-67.5	96.0	95.0
		HS ^d	27.1	-67.7	-66.7	94.8	93.8
		HS/SD	27.1	-68.5	-67.5	95.6	94.6
		ST/SD	27.1	-68.5	-67.5	95.6	94.6
		FD	27.5	-68.5	-67.5	96.0	95.0
		FD/SD	27.5	-68.5	-67.5	96.0	95.0
	4xDS3 High Gain	NP	30.0	-68.5	-67.5	98.5	97.5
		NP/SD	30.0	-68.5	-67.5	98.5	97.5
		HS ^d	29.6	-67.7	-66.7	97.3	96.3
		HS/SD	29.6	-68.5	-67.5	98.1	97.1
		ST/SD	29.6	-68.5	-67.5	98.1	97.1
		FD	30.0	-68.5	-67.5	98.5	97.5
		FD/SD	30.0	-68.5	-67.5	98.5	97.5

Table 4-3: RF performance specifications (Continued)

Band (GHz)	Capacity	Config- uration ^b	Tx Pwr Output (dBm)	Receive Threshold		System Gain ^a	
				10 ⁻³ BER (dBm)	10 ⁻⁶ BER (dBm)	10 ⁻³ BER (dB)	10 ⁻⁶ BER (dB)
10.5 to 10.6; 11.1 to 11.6	8 DS1	NP	26.0	-81.5	-80.0	107.5	106.0
		NP/SD	26.0	-81.5	-80.0	107.5	106.0
		HS ^d	25.6	-80.5	-79.0	106.1	104.6
		HS/SD	25.6	-81.5	-80.0	107.1	105.6
		ST/SD	25.6	-81.5	-80.0	107.1	105.6
		FD	26.0	-81.5	-80.0	107.5	106.0
		FD/SD	26.0	-81.5	-80.0	107.5	106.0
	16 DS1	NP	24.5	-75.0	-73.5	99.5	98.0
		NP/SD	24.5	-75.0	-73.5	99.5	98.0
		HS ^d	24.1	-74.0	-72.5	98.1	96.6
		HS/SD	24.1	-75.0	-73.5	99.1	97.6
		ST/SD	24.1	-75.0	-73.5	99.1	97.6
		FD	24.5	-75.0	-73.5	99.5	98.0
		FD/SD	24.5	-75.0	-73.5	99.5	98.0
	28 DS1/DS3	NP	25.0	-75.0	-73.5	100.0	98.5
		NP/SD	25.0	-75.0	-73.5	100.0	98.5
		HS ^d	24.6	-74.0	-72.5	98.6	97.1
		HS/SD	24.6	-75.0	-73.5	99.6	98.1
		ST/SD	24.6	-75.0	-73.5	99.6	98.1
		FD	25.0	-75.0	-73.5	100.0	98.5
		FD/SD	25.0	-75.0	-73.5	100.0	98.5
	16 DS1 High Gain	NP	25.5	-77.0	-76.0	102.5	101.5
		NP/SD	25.5	-77.0	-76.0	102.5	101.5
		HS ^d	25.1	-76.0	-75.0	101.1	100.1
		HS/SD	25.1	-77.0	-76.0	102.1	101.1
		ST/SD	25.1	-77.0	-76.0	102.1	101.1
		FD	25.5	-77.0	-76.0	102.5	101.5
		FD/SD	25.5	-77.0	-76.0	102.5	101.5
	28 DS1/DS3 High Gain	NP	26.5	-77.5	-76.5	104.0	103.0
		NP/SD	26.5	-77.5	-76.5	104.0	103.0
		HS ^d	26.1	-76.5	-75.5	102.6	101.6
		HS/SD	26.1	-77.5	-76.5	103.6	102.6
		ST/SD	26.1	-77.5	-76.5	103.6	102.6
		FD	26.5	-77.5	-76.5	104.0	103.0
		FD/SD	26.5	-77.5	-76.5	104.0	103.0

Table 4-3: RF performance specifications (Continued)

Band (GHz)	Capacity	Config- uration ^b	Tx Pwr Output (dBm)	Receive Threshold		System Gain ^a	
				10 ⁻³ BER (dBm)	10 ⁻⁶ BER (dBm)	10 ⁻³ BER (dB)	10 ⁻⁶ BER (dB)
10.5 to 10.6; 11.1 to 11.6	OC-3/3xDS3 Standard Gain	NP	25.0	-71.5	-70.0	96.5	95.0
		NP/SD	25.0	-71.5	-70.0	96.5	95.0
		HS ^d	24.6	-70.5	-69.0	95.1	93.6
		HS/SD	24.6	-71.5	-70.0	96.1	94.6
		ST/SD	24.6	-71.5	-70.0	96.1	94.6
		FD	25.0	-71.5	-70.0	96.5	95.0
		FD/SD	25.0	-71.5	-70.0	96.5	95.0
	OC-3/3xDS3 High Gain	NP	28.5	-71.5	-70.0	100.0	98.5
		NP/SD	28.5	-71.5	-70.0	100.0	98.5
		HS ^d	28.1	-70.5	-69.0	98.6	97.1
		HS/SD	28.1	-71.5	-70.0	99.6	98.1
		ST/SD	28.1	-71.5	-70.0	99.6	98.1
		FD	28.5	-71.5	-70.0	100.0	98.5
		FD/SD	28.5	-71.5	-70.0	100.0	98.5
	4xDS3 Standard Gain	NP	25.0	-68.0	-67.0	93.0	92.0
		NP/SD	25.0	-68.0	-67.0	93.0	92.0
		HS ^d	24.6	-67.0	-66.0	91.6	90.6
		HS/SD	24.6	-68.0	-67.0	92.6	91.6
		ST/SD	24.6	-68.0	-67.0	92.6	91.6
		FD	25.0	-68.0	-67.0	93.0	92.0
	4xDS3 High Gain	NP	28.5	-68.0	-67.0	96.5	95.5
		NP/SD	28.5	-68.0	-67.0	96.5	95.5
		HS ^d	28.1	-67.0	-66.0	95.1	94.1
		HS/SD	28.1	-68.0	-67.0	96.1	95.1
		ST/SD	28.1	-68.0	-67.0	96.1	95.1
		FD	28.5	-68.0	-67.0	96.5	95.5
		FD/SD	28.5	-68.0	-67.0	96.5	95.5

a. System gain = Tx power output - receive threshold.

b. Configurations:

NP = nonprotected transmitter and receiver

NP/SD = nonprotected transmitter, space diversity receivers

HS = hot standby transmitters, protected receivers

HS/SD = hot standby transmitters, space diversity receivers

ST/SD = split transmitters/space diversity receivers; separate main (transmit and receive) and space diversity (transmit and receive) antennas.

FD = Frequency diversity transmitters and receivers.

FD/SD = Frequency diversity transmitters, space diversity receivers or hybrid diversity receivers

c. System gain is 1 dB lower for LL6 GHz band (5860-5915 MHz).

d. For HS, thresholds are for RCVR 1 (main); thresholds for RCVR 2 (standby) are approximately 6 dB higher.

Transmitter

Frequency Stability

$$\pm 0.0003\% = \pm 3 \text{ ppm}$$

Unwanted (Out-of-Band and Spurious) Emissions

The Constellation radio meets the following specifications:

- FCC Part 101 Section 101.111, Emission Limitations.
- FCC Part 15, Subpart B, Class A

Receiver

General Specifications

Frequency stability	$\pm 0.0003\% = \pm 3 \text{ ppm}$
Residual BER (typical at room temperature)	$< 10^{-12}$ per hop or link
Receiver image rejection	$> 90 \text{ dB}$



Refer to [Chapter 7](#) for performance curves.

Receiver Overload*

Band (GHz)	10 ⁻⁶ BER (dBm)	10 ⁻³ BER (dBm)
6	-17.0	-16.0
7/8	-17.5	-16.5
10/11	-18.5	-17.5

* Typical values for nonprotected systems measured at the antenna port of the Antenna Coupling Unit (ACU).

Dispersive Fade Margin (DFM)

Table 4-4: DFM* with delay of 6.3 ns

	BER 10 ⁻³ (dB)
8 DS1	71.5
16 DS1	68.5
28 DS1 / DS3	66.5
OC-3 / 3xDS3	50.0
4xDS3	45.0

*Typical values for nonprotected systems measured at the antenna port of the ACU.

Signal Acquisition Time

The system must re-establish customer traffic within 60 ms of a signal interruption. Typical acquisition time is 60 ms for the majority of radios; the exceptions are the 16T high gain radio with an acquisition time of 130 ms and the 28 T high gain radio with an acquisition time of 100 ms.

For RF signal failures lasting greater than 1 minute, the system must re-establish customer traffic within 250 ms of restoration of the RF signal.

Auto-DADE

The main and space-diversity receiver signal delays are automatically equalized up to a diversity antenna spacing of 150 feet.

Tributary Interface

Tributary Signal Characteristics

Table 4-5: Line Interface Specifications

Tributary	Bit Rate (Mbit/s)	Impedance/Connector	Line Code	Length
DS1	1.544	100 ohms/50-pin	AMI/B8ZS	655 feet to DSX-1
E1	2.048	120 ohms/50-pin	HDB3	6 dB at 1.024 MHz
DS3	44.736	75 ohms/BNC female	B3ZS	450 feet to DSX-3
E1 (wayside)	2.048	75 ohms/BNC female or 120 ohms/RJ-45	HDB3	6 dB at 1.024 MHz
DS1 (wayside)	1.544	100 ohms/RJ-45	AMI/B8ZS	655 feet to DSX-1
OC-3/STM-1o	155.52	SC connector	NRZ	See Table 4-6
STS-3/STM-1e	155.52	75 ohms/BNC female	CMI	100 meters

Table 4-6: Detailed Optical Specifications

OC-3, OC3c, STS3:	Single-Mode	Multi-Mode
Transmit Level	-8 to -15 dBm	-14 to -19 dBm
Receive Level	-7 to -34 dBm	-14 to -30 dBm
Center Wavelength	1300 nm	1300 nm
Path Length	Up to 15 km	Up to 1 km
Compliance	Bellcore (SONET OC3/IR-1) and ITU-T G.957 STM1/S.1.1	FDDI PMD ATM/SONET standards

Tributary Jitter

- Jitter transfer conforms to AT&T Standard TR-62411.
- Jitter tolerance conforms to Bellcore Standard GR-499, Section 7.3.2.
- Jitter generation conforms to Bellcore Standard GR-499, Section 7.3.3.
- The DS1 interface meets the jitter transfer and jitter acceptance requirements of ITU-T G.958 and Bellcore GR-253.
- Jitter curves are given in [Chapter 7, “Performance Curves”](#).

Tributary Specification Compliance

Tributary	Bit Rate (Mbit/s)	Bellcore	ANSI	ITU-T
DS1	1.544	GR-499-CORE, Section 9.3	T1.102-1993	G.703
DS3	44.736	GR-499-CORE	T1.102-1993	G.703
E1	2.048			G.703

SDH/SONET Overhead Usage Map

The SONET/SDH Overhead is assigned as follows:

Service Channel: MS1, MS2

NMS: MS3, MS4

Wayside T1: N3, N4, MS5, MS6, U1-U8, U11-U14, U17-U20, U23-U26, N5, N6

Wayside E1: C1/N1, N3, N4, MS5, MS6, U1-U26, N5, N6

SONET/SDH OVERHEAD								
A1	A1	A1	A2	A2	A2	C1	C1/N1	C1/N1
B1	MS1	MS2	E1	MS5	U1	F1	N3	N4
D1	MS3	MS4	D2	MS6	U2	D3	U3	U4
H1	H1	H1	H2	H2	H2	H3	H3	H3
B2	B2	B2	K1	U5	U6	K2	U7	U8
D4	U9	U10	D5	U11	U12	D6	U19	U20
D7	U15	U16	D8	U17	U18	D9	U19	U20
D10	U21	U22	D11	U23	U24	D12	U25	U26
Z1	Z1	Z1	Z2	Z2	Z2	E2	N5	N6



If Wayside is disabled the associated overhead bytes are passed through the radio transparently.

Signal Processing

Equipment Transmission Delay Time

One-way transmission delay per hop is measured through back-to-back radio subsystems.

Capacity	DS1 to DS1 (μ s)	DS3 to DS3 (μ s)
8 DS1	302	
16 DS1	177	
16T High Gain	1.5 ms	
28 DS1	105	
28T High Gain	780	
DS3		85
4DS3		180

Modulation

Capacity	Modulation Format	Occupied Bandwidth (MHz)	Symbol Rate (Msym/s)	Agg. Bit Rate (Mbit/s)
8 DS1	32 QAM	3.43	2.74	13.70
16 DS1	128 QAM	4.80	3.84	26.85
28 DS1/DS3	64 QAM	9.71	7.76	46.58
3 DS3	128 TCM	29.58	24.65	172.56
OC-3	128 TCM	29.58	24.65	172.56
4 DS3	256 TCM	30.0	24.68	197.42
16T High Gain	128 TCM	5.0	4.09	28.614
28 T High Gain	64 4D-TCM	10.0	8.38	50.28

Protection Switching

1+1 Transmitter and Receiver Switching

Hot-Standby Transmitter Switching

Hot-standby (HS) Transmitter protection switching is automatically caused by a Transmitter fault or by reverse path protection and is nonrevertive.

Reverse Path Protection

Reverse path protection software enables a HS radio to automatically switch from the on-line Transmitter to the standby Transmitter when the Receiver has a sync loss alarm. Reverse path protection is accomplished in less than 60 milliseconds.

HS Receiver Switching

Hot-standby Receiver protection switching is automatically caused by a Receiver fault and does not revert to the main Receiver after the fault clears. Path and maintenance switching do not introduce errors. Switching caused by a fault introduces errors.

Space Diversity Receiver Switching

Space diversity protected Receiver switching is automatic and nonrevertive. Space diversity receive switching is errorless and employs an anticipatory function which uses performance degradation as an indicator.

Maintenance

Protected Transmitters and Receivers are arranged to allow repair of a single Transmitter or a Receiver without removing the traffic.

Manual Switch-over

A control capability is provided to switch the main and standby Transmitters or Receivers to lock-on main or lock-on standby. Manual locking of a protected Transmitter or Receiver is reported as a minor alarm. Manual Receiver switching has no effect on traffic.

1+1 Switching Times

The average recovery time for switching caused by hardware failures in a protected system is 60 ms or less, except for 16T high gain at 130 ms or less, and 28 T high gain at 100 ms or less.

For temporary signal interruptions of 1 to 2 seconds duration, no more than 5% of recovery times will exceed 0.5 second.

Supervisory Interfaces

Network Management Interface

Table 4-7: Network management interface

Port	Signal	Application
FSCAN	RS-232 async	FarScan computer connection
Monitor	RS-232 async	SCAN interconnection
VersaT1lity	RS-232 async or RS-423* async	SCAN interconnection
Keypad	RS232 async	Hand-held Keypad connection
Aux	RS-422 sync	Constellation Radio interconnection
Spur	RS-422 sync	Constellation Radio interconnection
Ethernet	10Base-T	SNMP

* *Inverted mark/space polarity.*



Note: Refer to the **Constellation Installation and Maintenance manual** for pinout information and data rates.

Alarms

Radio Alarm LED Indicators

Radio alarm LED indicators are:

- MAJOR (red)
- MINOR (red)
- STATUS (yellow)

Site Status Inputs and Control Outputs

Eight relay outputs and eight opto-isolated alarm inputs are provided on External Alarm/Control connector. Input level of alarm input shall be open or ground.

The first two relay outputs are pre-defined to LOCAL MAJOR and LOCAL MINOR alarms in the factory. The other six relay outputs can be used for customer site command outputs or radio alarm outputs.

Alarm List for Relay Output

The following radio alarms can be configured through the Keypad.

- Major Alarm
- Minor Alarm
- Input LOS
- Sync Loss A
- Sync Loss B
- Errored Seconds A
- Errored Seconds B
- Signal Degradation A1
- Signal Degradation A2
- Signal Degradation B1
- Signal Degradation B2
- On Line Mod/Tx A
- On Line Mod/Tx B
- On Line Rx A
- On Line Rx B
- On Line HLM
- Manual Control (external site control)

Relay Specifications

Radio alarm relays are provided as dry relay contacts to customer equipment from the External Alarm/Control connector.

Table 4-8: Relay specifications

Characteristic	Value
Nominal switching capacity (resistive)	2 A, 60 VDC
Maximum switching power (resistive)	60 W
Maximum switching voltage	220 VDC
Maximum switching current	2 A
Minimum switching capability	10 μ A, 10 mV DC

Environmental Specifications

Electromagnetic Emissions

Constellation radios are shielded for electromagnetic interference and meet the following electromagnetic compatibility standards:

- FCC Part 15, Subpart B for Class A devices.

Conducted Emissions

- ETS 300 826
- Bellcore TR-TSY-000752, 14.5.2

Ambient Temperature, Humidity, and Altitude

Characteristic	Value
Temperature range:	
Operating	0°C to 50°C
Storage and transportation	-40°C to +65°C
Humidity	to 95%, noncondensing
Altitude	0 to 5000 meters, AMSL

Earthquake, Shock, and Vibration

Test specification

IEC 721-3-1

Rack Specifications

Standard EIA aluminum rack meets zone 2 earthquake standards. Optional zone 4 rack and bracing kit are available.

Mechanical Dimensions

EIA Rack

Refer to [Appendix A](#) for information on a Harris standard rack.

Constellation Radio

Configuration*	Unit	Height	Depth	Width
Terminal	Millimeters	622	300	445
	Inches	24.5	11.8	17.5
8/16/28xDS1 Repeater**	Millimeters	1200	300	445
	Inches	47.25	11.8	17.5

* Radio mounts in a standard 19-inch wide rack. Dimensions include branching circulators, fully configured ACU and doors. Cannot be flush-mounted.

** With ADM. 1-3xDS3 and OC3 use back-to-back terminals.

Weights (Typical)

Configuration	pound	kg
Constellation terminal (fully equipped) (MHSB, 28 x DS1 terminal)	74	33.6
Constellation repeater (fully equipped)	127	57.6
7-foot x 19-inch rack	35	15.9

SYSTEM INTERCONNECT AND CONFIGURATION

System Interconnection

Orderwire Interconnection

[Table 5-1](#) describes the interconnection between the Harris MCD Service Channel equipment and the Constellation radio.

Table 5-1: Orderwire interconnection

Constellation Port	Connector Type	Radio Equipment	Port	Connector Type	Signal
VF PORT 1	RJ45	DVS II	VF1	50-pin female	4W VF (600 Ω)
			VF2	50-pin female	
		MegaStar	VF1B	DB-25 female	
			VF2A	DB-25 female	
			VF2B		
		MicroStar L	4W VF	RJ-45	
		MicroStar L (16 E1)		DE-9 female	
		MicroStar M (1 rms IDU)		DC-37 female	
		MicroStar M/H (3 rms IDU)		DE-9 female	
VF PORT 2	RJ45	DVSII	VF1	50-pin female	4W VF (600 Ω)
			VF1 AUX		
			VF2	50-pin female	
			VF2 AUX		
		MegaStar	VF1A	DB-25 female	
			VF1B		
			VF2A	DB-25 female	
		MicroStar L	4W VF	RJ-45	
		MicroStar L (16 E1)		DE-9 female	
		MicroStar M (1 rms IDU)		DC-37 female	
		MicroStar M/H (3 rms IDU)		DE-9 female	

Table 5-1: Orderwire interconnection (Continued)

Constellation Port	Connector Type	Radio Equipment	Port	Connector Type	Signal
DATA PORT 1 & 2	RJ45	DVSII	DATA1	50-pin female	RS-232
			DATA2		
			DATA3		
			DATA4		
		MegaStar	DATA1	DA-15 female	
			DATA2		
		MicroStar L/M/H	DATA	DE-9 female	



Refer to the *Constellation Installation and Maintenance manual* for detailed pinout information.

Four-Wire VF Orderwire Interface

Connector: RJ45



One VF orderwire channel provides two 4-wire VF ports.

Table 5-2: Four-wire VF Orderwire input specifications

VF Port	Input Levels ^a	Output Levels ^a
VF1	0 dBm (default) -16 dBm	0 dBm (default) +7 dBm
VF2	0 dBm (default) +7 dBm	0 dBm (default) -16 dBm

a. Selectable through the Keypad.

Table 5-3: Four-wire VF ports performance specifications^a

Frequency response	300-3400 Hz, ± 1.5 dB
Idle noise C-message	≤ 30 dBm0
Quantizing noise	≤ 56 dBm0 at 1004 Hz
Return loss	≥ 40 dB (telephone set on-hook) ≥ 15 dB (telephone set off-hook when only one telephone is connected to 2-wire port)
Impedance	600 ohms, balanced
Output level accuracy	± 1.0 dB

a. Specifications are for one drop/insert.

Table 5-4: Ringing generator specifications

Load	2 REN
Voltage (rated load)	60 Vrms
Ringing cadence ON	2.3 sec
Ringing cadence OFF	4.7 sec

Two-Wire VF Orderwire Interface

Standard 2-wire telephone jack (RJ11).

Address

The DTMF receiver decoder can be set (using the Keypad) to any address between 000 and 999. This feature is compatible with DVS II orderwire and Megastar orderwire. The * key causes all stations to be called. The # key is not used by the Constellation VF Orderwire but is used by the DVS II orderwire to cancel the “all call” at the DVS II sites.

Data Orderwire Interface

Connector: RJ45

Maximum Distance: 50 feet (worst case)



One data channel provides two RS-232 ports.

Two RS-232 data ports can be selected to be bridged together providing half-duplex communications or selected to be isolated providing full duplex in a port-to-port application. Data can be set for sampling or asynchronous start-stop data signals. When data is set for sampling, data rates up to 4800 bit/s can be used with no restriction on the size of the data byte. When asynchronous start-stop is selected, bit rates 9600 bit/s or 19.2 kbit/s are available with the data byte set to 8 bits. A parity option can be enabled to send the parity bit through the system. The system does not monitor the parity bit.

Table 5-5: Output voltage range (with 7k ohm load)

	Minimum (V)	Maximum (V)
Low	- 5	-11
High	+ 5	+11

Table 5-6: Input voltage range

	Minimum (V)	Maximum (V)
Low	0	+ 0.8
High	+ 3.6	+5.0

SCAN Equipment Interconnection

Table 5-7 describes the interconnection between Harris MCD SCAN (system control and alarm network) equipment and the Constellation radio.

Table 5-7: SCAN equipment interconnection

Constellation Port	Connector Type	Radio Equipment	Port	Connector Type	Signal
AUX	RJ45	Constellation	AUX	RJ45	RS-422
SPUR			SPUR		
VERSATILITY	RJ45	CAU	COMM 1	DE-9 female	RS-232 or RS-423*
			COMM 2		
			COMM 3		
			RTU		
		DVA	COMM 1	DE-9 female	RS-232 or RS-423*
			COMM 2		RS-232 or RS-423*
			COMM 3		RS-423*
			COMM 4		RS-423*
			COMM 5		RS-423*
		DVM/DVL/	INT CTL	DB-25 female	RS-423*
		DVT	EXT B		
		GlobeStar	RTU	DE-9 female	RS-232 or RS-423*
		MegaStar	AUX	DE-9 female	RS-232 or RS-423*
			SPUR		
		MicroStar L/M/H	RTU	DE-9 female	RS-232 or RS-423*

Table 5-7: SCAN equipment interconnection (Continued)

Constellation Port	Connector Type	Radio Equipment	Port	Connector Type	Signal
Monitor	RJ45	CAU	COMM 1	DE-9 female	RS-232
			COMM 2		
			COMM 3		
			RTU		
		DVA	COMM 1	DE-9 female	RS-232
			COMM 2		
		GlobeStar	RTU	DE-9 female	RS-232
		MegaStar	AUX	DE-9 female	RS-232
			SPUR		
		MicroStar L/M/H	RTU	DE-9 female	RS-232
FSCAN	RJ45	FarScan PC	COMM	DE-9 male	RS-232
		HNM UNIX Station	COMM	DB-25 female	RS-232
ETHERNET	RJ45	StarView PC	LAN	RJ45	10Base-T

* RS-423 is with inverted Mark/Space polarity.



Refer to the *Constellation Installation and Maintenance Manual* for detailed pinout information.

ANTENNA COUPLING UNIT (ACU)

ACU Waveguide Flanges

Table 6-1: Standard flange specifications

Band (GHz)	Flange Type	Tapped
5.9 to 7.125	CMR-137	#6-32
7.1 to 8.5	CMR-112	#6-32
10.5 to 11.7	UG-39	#8-32

Table 6-2: Spacer adapter height, standard (other interfaces available)

Band (GHz)	Flange Type	Main Spacer Height	Space Diversity Spacer Height	Tapped
5.9 to 7.125	CPR-137G	1.75 in. (44.45 mm)	4.0 in. (101.6 mm)	#10-32
7.1 to 8.5	CPR-112G	1.75 in. (44.45 mm)	3.5 in. (88.9 mm)	#8-32
10.5 to 11.7	CPR-90F	1.75 in. (44.45 mm)	1.75 in. (44.45 mm)	#8-32

ACU Configuration and Mechanical Drawings

Available Configurations

Table 6-3: Available ACU configurations*

ACU Configuration
NP (Tx/Rx)
NP SD (Tx/Rx, Rx)
HS (Tx/Rx)
HS SD (Tx/Rx, Rx)
HS prot. split Tx/SD Rx (Tx/Rx, Tx/Rx)
HS, 2 antennas (Tx/Tx, Rx/Rx)
FD, 1 antenna (Tx/Tx/Rx/Rx)
FD, 2 antennas (Tx/Tx, Rx/Rx)
NP, 2 antennas (Tx, Rx)
FD, 2 antennas (Tx/Rx, Tx/Rx)
HS, 2 antennas (Tx/Rx, Tx/Rx)
HS SD, 3 antennas (Tx, Rx, Rx)
NP SD, 3 antennas (Tx, Rx, Rx)


**Consult your sales representative for availability.*

List of ACU Mechanical Drawings

- ACU, nonprotected (top view) 6-3
- ACU, nonprotected (front view) 6-4
- ACU, hot standby (top view) 6-4
- ACU, hot standby (front view) 6-5
- ACU, hot standby Transmitters, space diversity
Receivers (top view) 6-5
- ACU, hot standby Transmitters, space diversity
Receivers (front view) 6-6
- ACU, hot standby/frequency diversity 2 antennas
(T/R, T/R) (top view) 6-6
- ACU, hot standby/frequency diversity 2 antennas
(T/R, T/R) (front view) 6-7
- ACU, repeater/dual terminal 6-8


ACU Mechanical Drawings

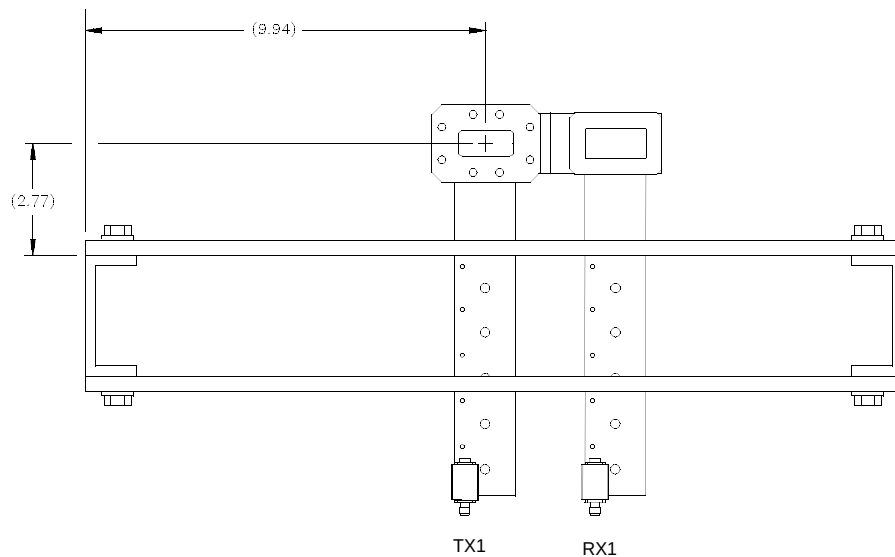Figure 6-1: ACU, nonprotected (top view), mechanical drawing



ANTENNA
COUPLING UNIT
(ACU)

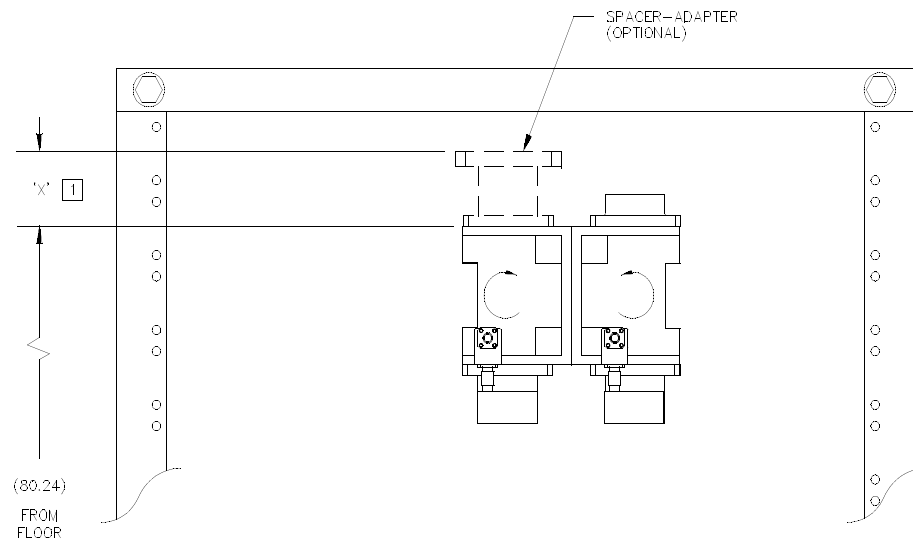Figure 6-2: ACU, nonprotected (front view), mechanical drawing



1 Refer to [Table 6-2 on page 6-1](#).

Figure 6-3: ACU, hot-standby (top view), mechanical drawing

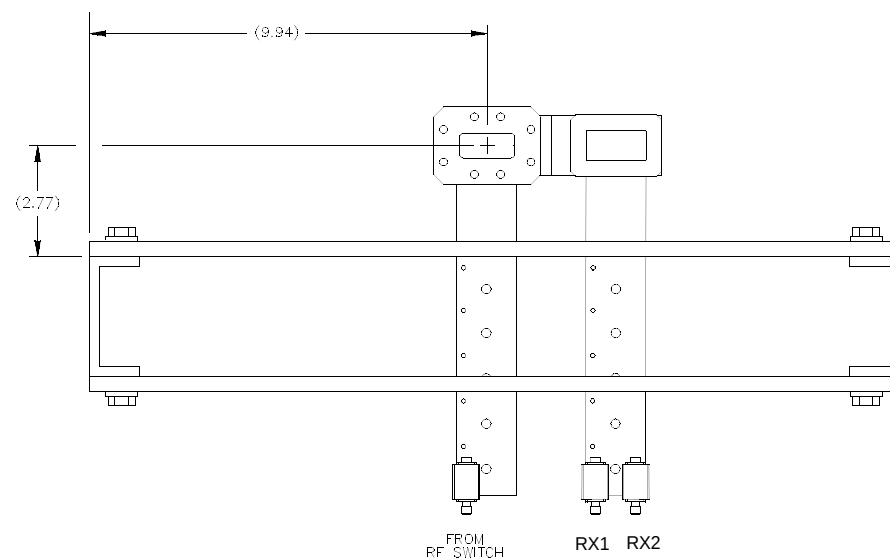
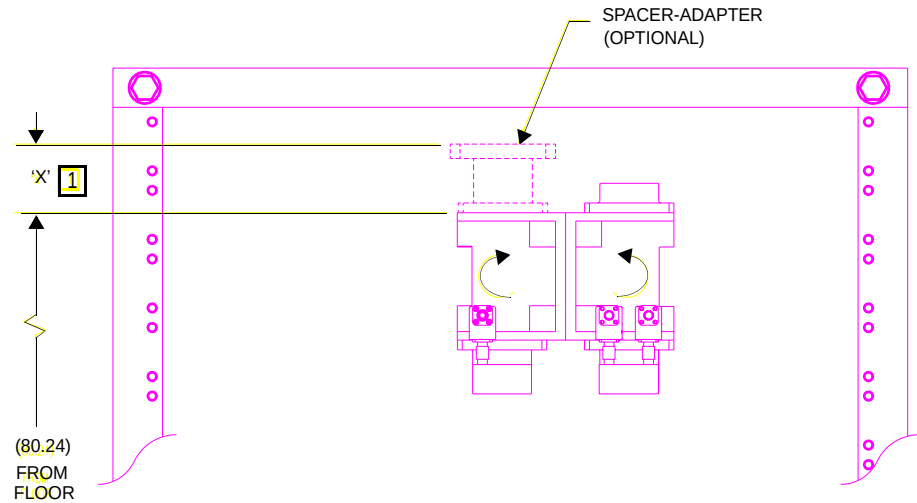
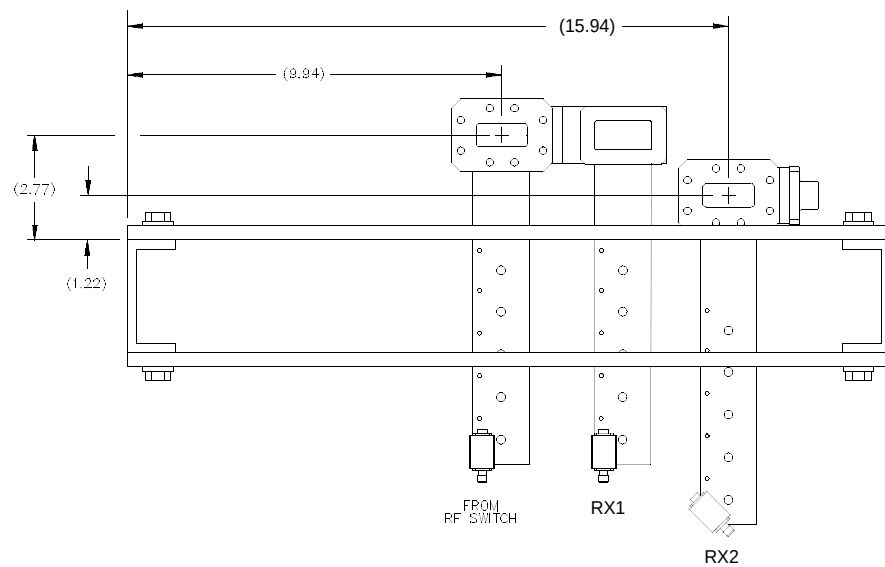



Figure 6-4: ACU, hot-standby (front view), mechanical drawing

1 Refer to [Table 6-2 on page 6-1](#).

Figure 6-5: ACU, hot-standby Transmitters, space-diversity Receivers (top view), mechanical drawing

ANTENNA
COUPLING
UNIT
(ACU)

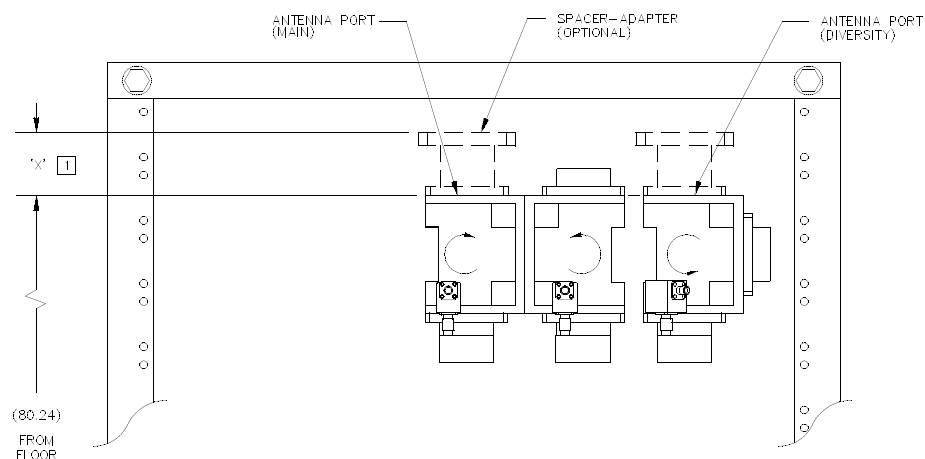Figure 6-6: ACU, hot-standby Transmitters, space-diversity Receivers (front view), mechanical drawing



1 Refer to [Table 6-2 on page 6-1](#).

Figure 6-7: ACU, hot-standby/frequency-diversity, 2-antenna (T/R, T/R) (top view), mechanical drawing


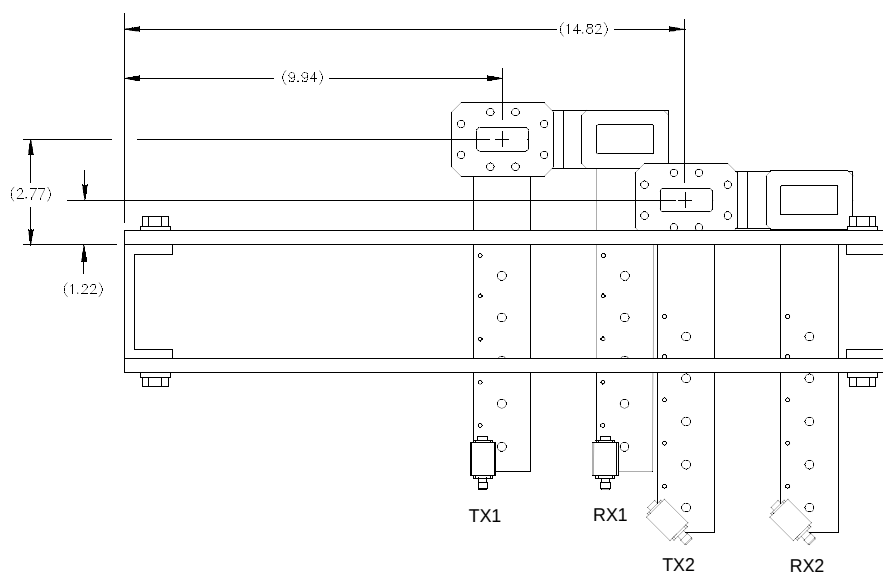
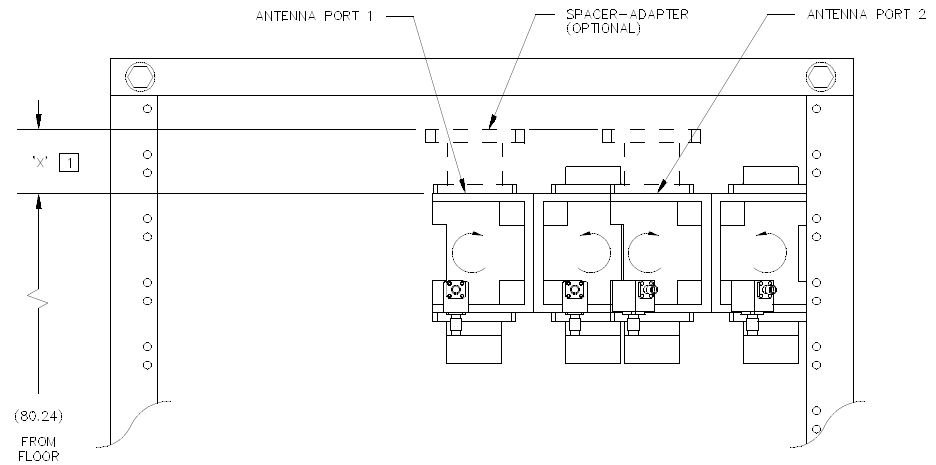


Figure 6-8: ACU, hot-standby/frequency-diversity 2-antenna (T/R, T/R) (front view), mechanical drawing

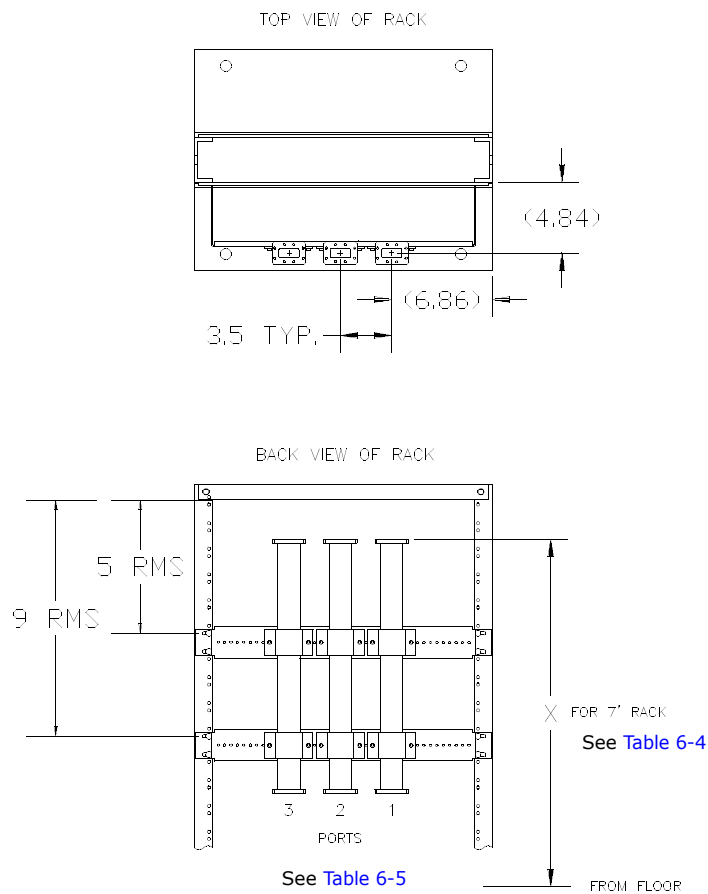

1 Refer to [Table 6-2 on page 6-1](#).

Figure 6-9: ACU, repeater/dual terminal, mechanical drawing**Table 6-4: X dimension from floor, ACU, repeater/dual terminal**

ACU frequency (GHz)	X dimension (inches)
6	80.24
7/8	79.61
11	79.25

ACU Port Configurations

Table 6-5: ACU port configurations

Available ACU Configuration	Port 1	Port 2	Port 3
NP (Tx/Rx)	TX/RX		
NP SD (Tx/Rx, Rx)	TX/RX	RX	
HS (Tx/Rx)	TX/RX		
HS SD (Tx/Rx, Rx)	TX/RX	RX	
HS, 2 antennas (Tx/Tx, Rx/Rx)	TX/TX	RX/RX	
HS/FD, 2 antennas (Tx/Rx, Tx/Rx)	TX/RX	TX/RX	
FD, 1 antenna (Tx/Tx/Rx/Rx)	TX/TX/RX/RX		
FD, 2 antennas (Tx/Tx, Rx/Rx)	TX/TX	RX/RX	
NP, 2 antennas (Tx, Rx)	TX	RX	
HS SD, 3 antennas (Tx, Rx, Rx)	TX	RX	RX
NP SD, 3 antennas (Tx, Rx, Rx)	TX	RX	RX

PERFORMANCE CURVES

Performance Curves

Performance curves provide important parameters (hop distance, channel spacing, and so forth) required for designing a communications system. The curves in this chapter include the following:

1. Typical threshold-to-interference (T/I) curve (6 GHz and 7/8 GHz, 8 DS1)
2. Typical threshold-to-interference (T/I) curve (10/11 GHz, 8 DS1)
3. Typical threshold-to-interference (T/I) curve (6 GHz and 7/8 GHz, 16 DS1)
4. Typical threshold-to-interference (T/I) curve (10/11 GHz, 16 DS1)
5. Typical threshold-to-interference (T/I) curve (6 GHz and 7/8 GHz, 28 DS1/DS3)
6. Typical threshold-to-interference (T/I) curve (10/11 GHz, 28 DS1/DS3)
7. Typical threshold-to-interference (T/I) curve (6, 7/8, 10/11 GHz, 155 Mbit/s, 128 TCM)
8. Typical threshold-to-interference (T/I) curve (6, 7/8, 10/11 GHz, 4DS3)
9. Typical BER versus C/N curve (8 DS1)
10. Typical BER versus C/N curve (16 DS1)
11. Typical BER versus C/N curve (28 DS1/DS3)
12. Typical BER versus C/N curve (Constellation 155)
13. Typical BER vs. C/N and C/I (Constellation 155)
14. Typical BER versus RSL curve

Threshold-to-Interference (T/I) Ratios

Overview

The T/I curve shows the strength of interference and the frequency away from the carrier required to degrade the 10^{-6} BER (bit error ratio) state threshold and the 10^{-3} BER dynamic/outage thresholds by 1 dB. Measurements were made by fading the wanted received signal level (RSL) until the 10^{-6} BER point is found (T). A modulated interfering signal is then added until the 10^{-6} BER point is degraded by 1 dB (I). The measurement is also made with a CW interfering signal which emulates an analog radio FM emission. The ratio is the T/I. The T/I curve is used for choosing radio frequency assignments and to find the fade margin in congested areas. T/I curves plotting allowable T/I versus frequency offset of the interfering signal must be on file with the frequency search companies and are therefore available for all Harris digital microwave radios.

Example: if 10^{-6} BER threshold is -80 dBm and T/I is 30 dB, then the allowable interference level at threshold is -80 dBm minus 30 dB = -110 dBm.

Like Signal T/I Ratio

Table 7-1: Like signal T/I for 6 and 7/8 GHz


Capacity	Co-channel T/I (dB)	Adjacent Channel T/I (dB)	Two Times Adjacent Channel T/I (dB)
8 DS1	25	-12	-40
16 DS1	33	-4	-32
28 DS1/DS3	29	-5	-38
OC-3/3xDS3	31	-14	-57
4xDS3	30	-1	-29

Table 7-2: Like signal T/I for 10/11 GHz

Capacity	Co-channel T/I (dB)	Adjacent Channel T/I (dB)	Two Times Adjacent Channel T/I (dB)
8 DS1	25	-12	-37
16 DS1	33	-4	-32
28 DS1/DS3	29	-5	-28
OC-3/3xDS3	31	-14	-57
4xDS3	30	-1	-29

T/I Curves

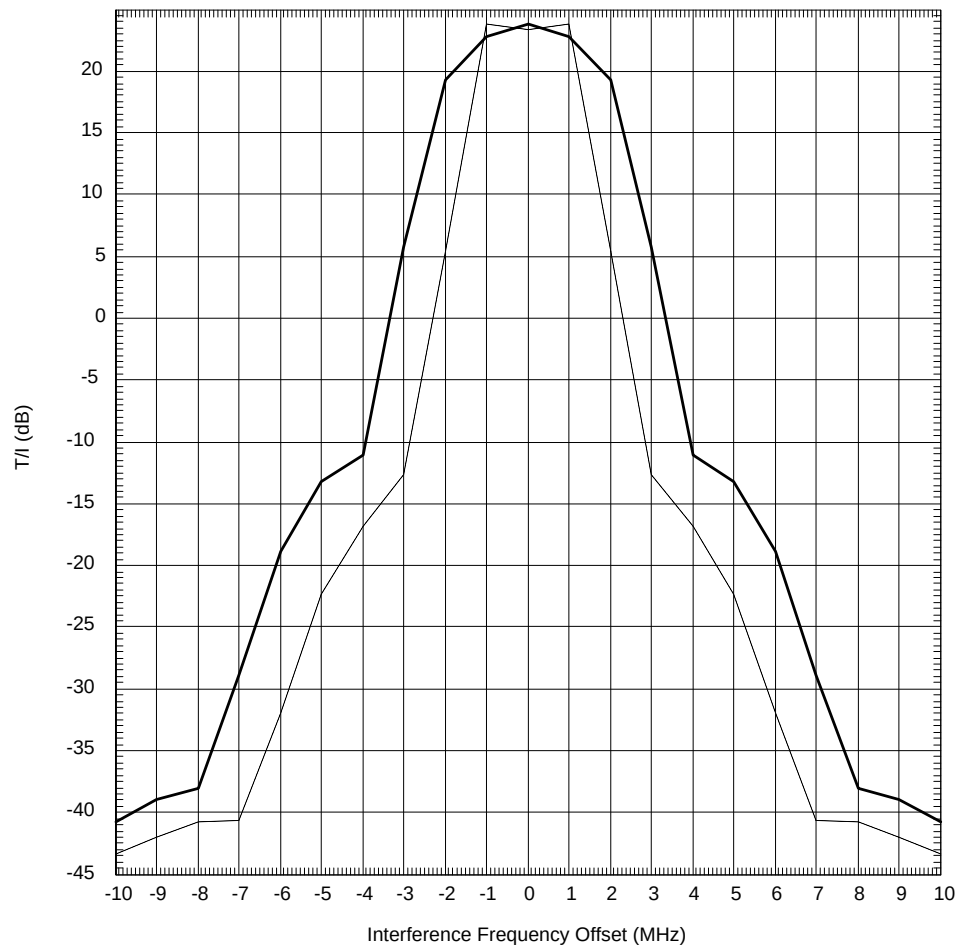Figure 7-1: Typical threshold-to-interference (T/I) curve (6 GHz and 7/8 GHz, 8 DS1)



KEY:


- Like Interferer
- Analog (CW) Interferer

Radio:

Capacity: 8 DS1
 Frequency Band: 5850 - 8500 MHz
 Date: 8/7/2000

Constellation

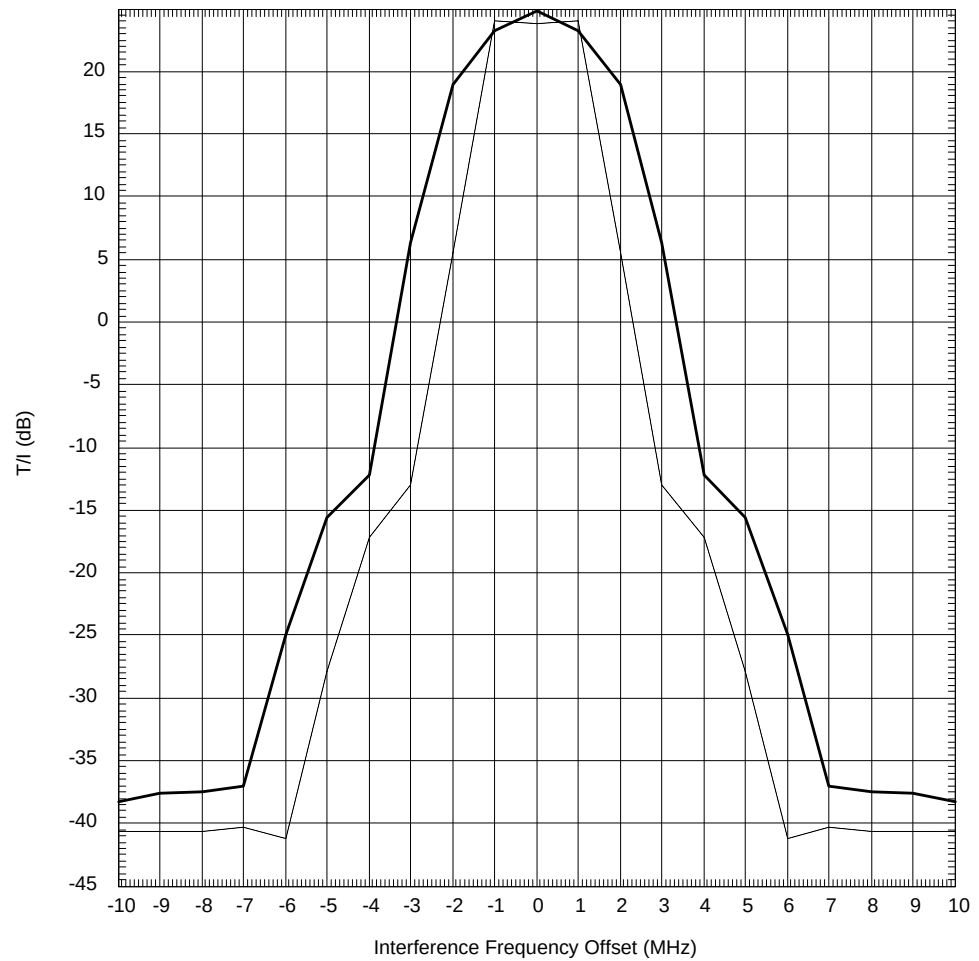
Figure 7-2: Typical threshold-to-interference (T/I) curve (10/11 GHz, 8 DS1)

**KEY:**

- Like Interferer
- - - Analog (CW) Interferer

Radio: **Constellation**
Capacity: 8 DS1
Frequency Band: 10550 - 11700 MHz
Date: 8/7/2000

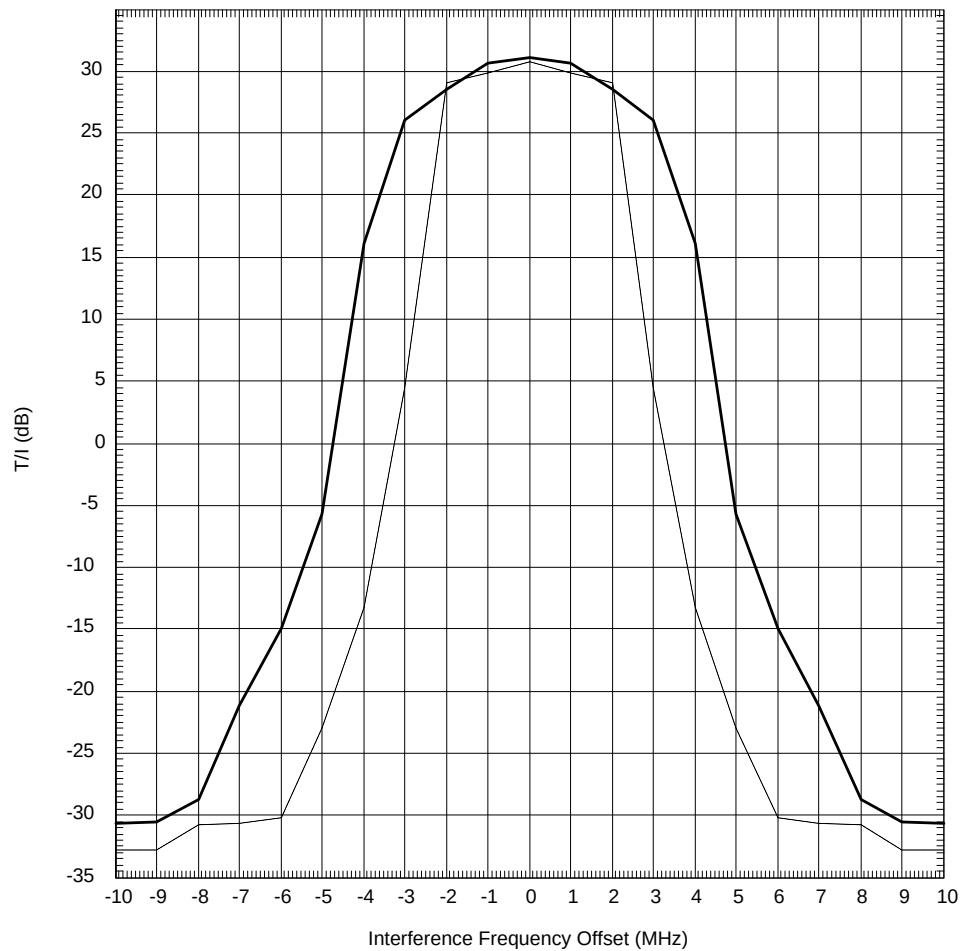Figure 7-3: Typical threshold-to-interference (T/I) curve (6 GHz and 7/8 GHz, 16 DS1)




KEY:

- Like Interferer
- Analog (CW) Interferer

Radio:	Constellation
Capacity:	16 DS1
Frequency Band:	5850 - 8500 MHz
Date:	8/7/2000

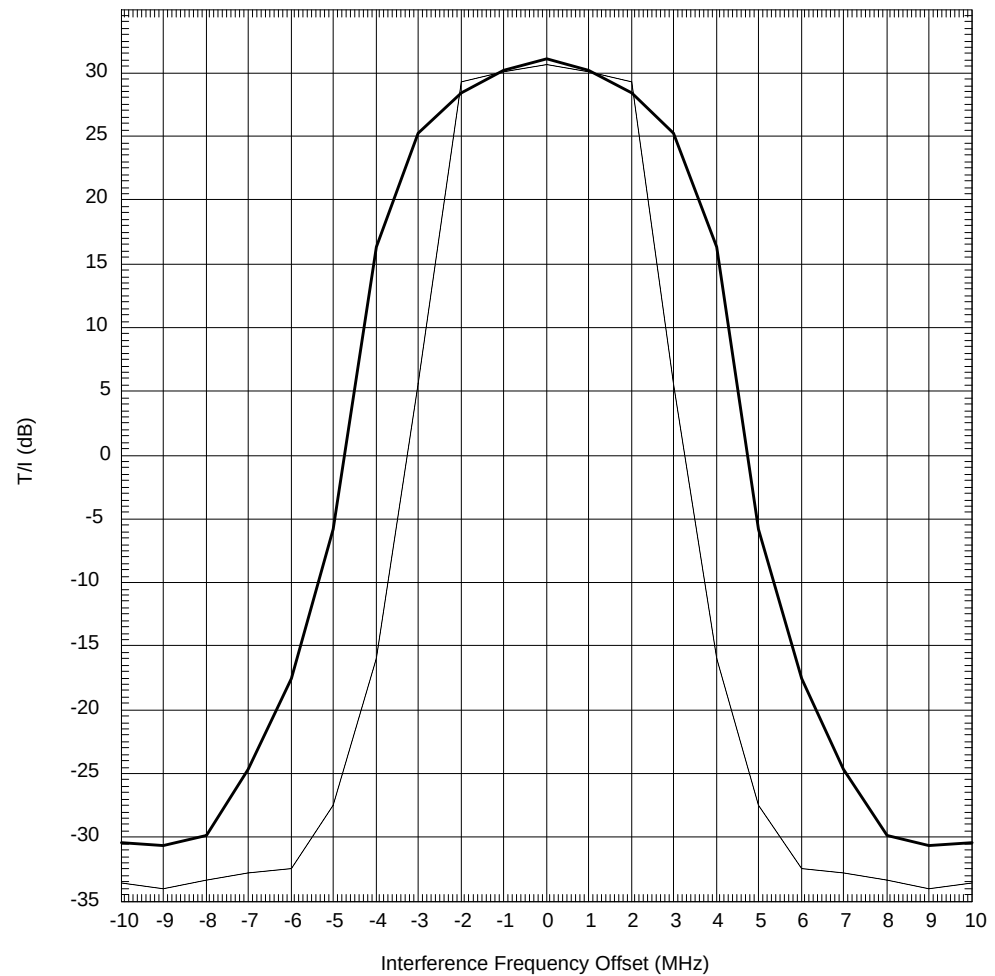
Figure 7-4: Typical threshold-to-interference (T/I) curve (10/11 GHz, 16 DS1)

**KEY:**

- Like Interferer
- Analog (CW) Interferer

Radio: **Constellation**
Capacity: 16 DS1
Frequency Band: 10550 - 11700 MHz
Date: 8/7/2000

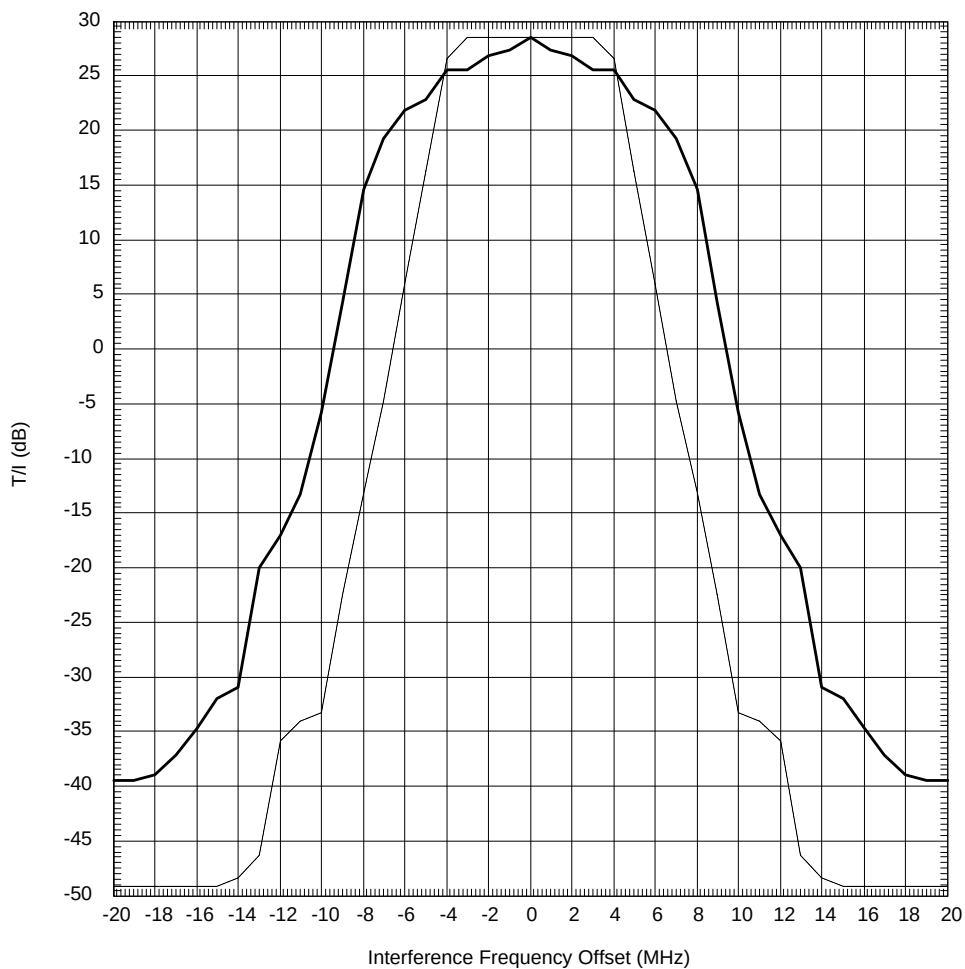Figure 7-5: Typical threshold-to-interference (T/I) curve (6 GHz and 7/8 GHz, 28 DS1/DS3)

**KEY:**


- Like Interferer
- Analog (CW) Interferer

Radio:

Capacity: 28 DS1
Frequency Band: 5850 - 8500 MHz
Date: 8/7/2000

Constellation

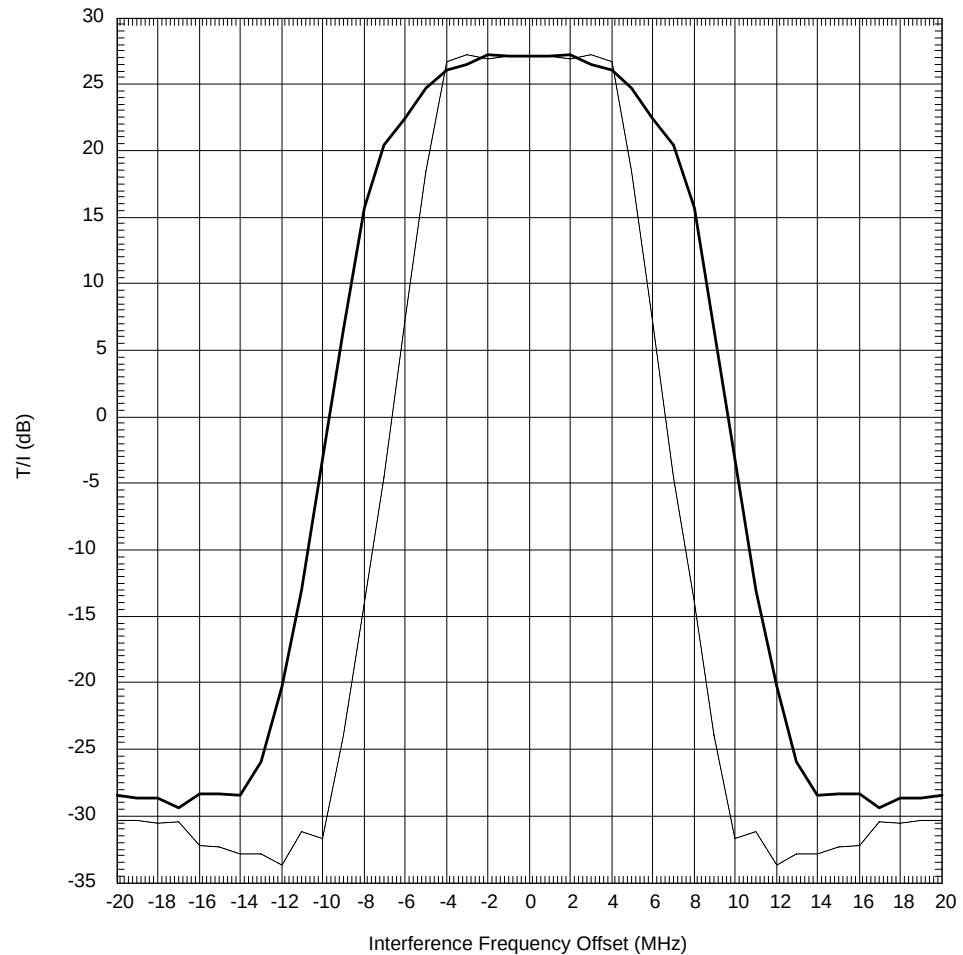Figure 7-6: Typical threshold-to-interference (T/I) curve (10/11 GHz, 28 DS1/DS3)

**KEY:**

- Like Interferer
- Analog (CW) Interferer

Radio:

Capacity:

Frequency Band:

Date:

Constellation

28 DS1

10700 - 11700 MHz

8/7/2000

Figure 7-7: Typical threshold-to-interference (T/I) curve (6, 7/8, 10/11 GHz, 155 Mbit/s, 128 TCM)

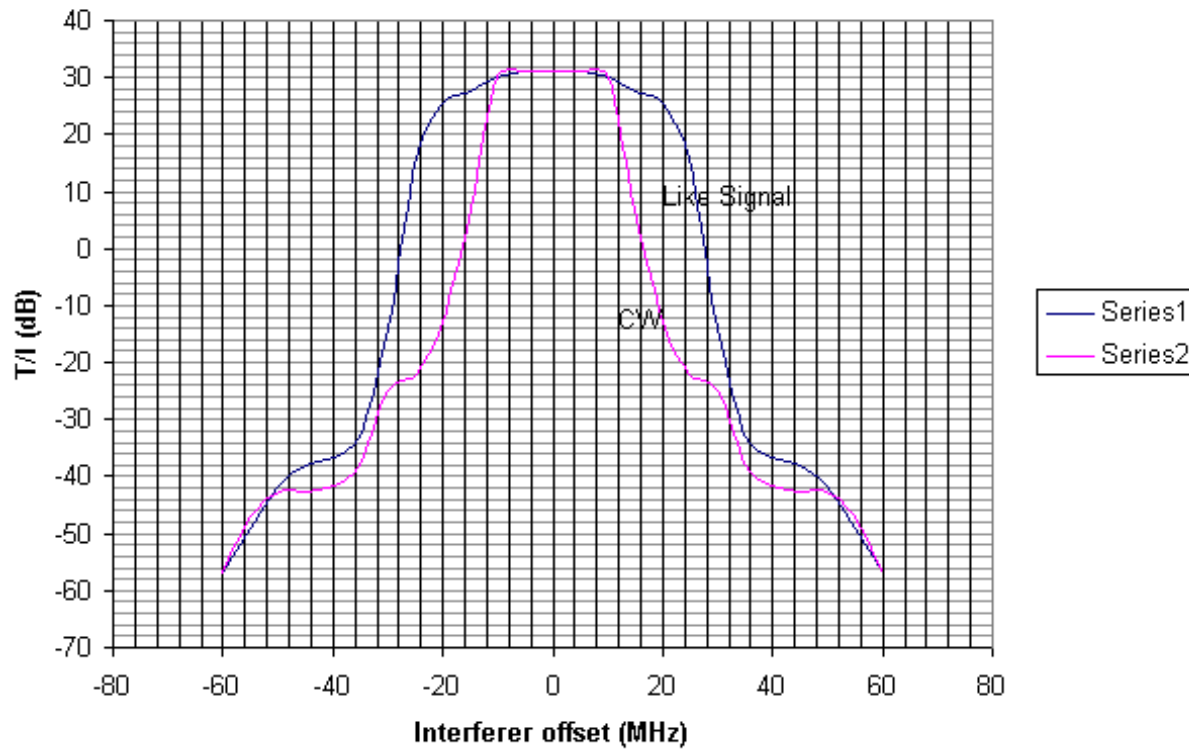
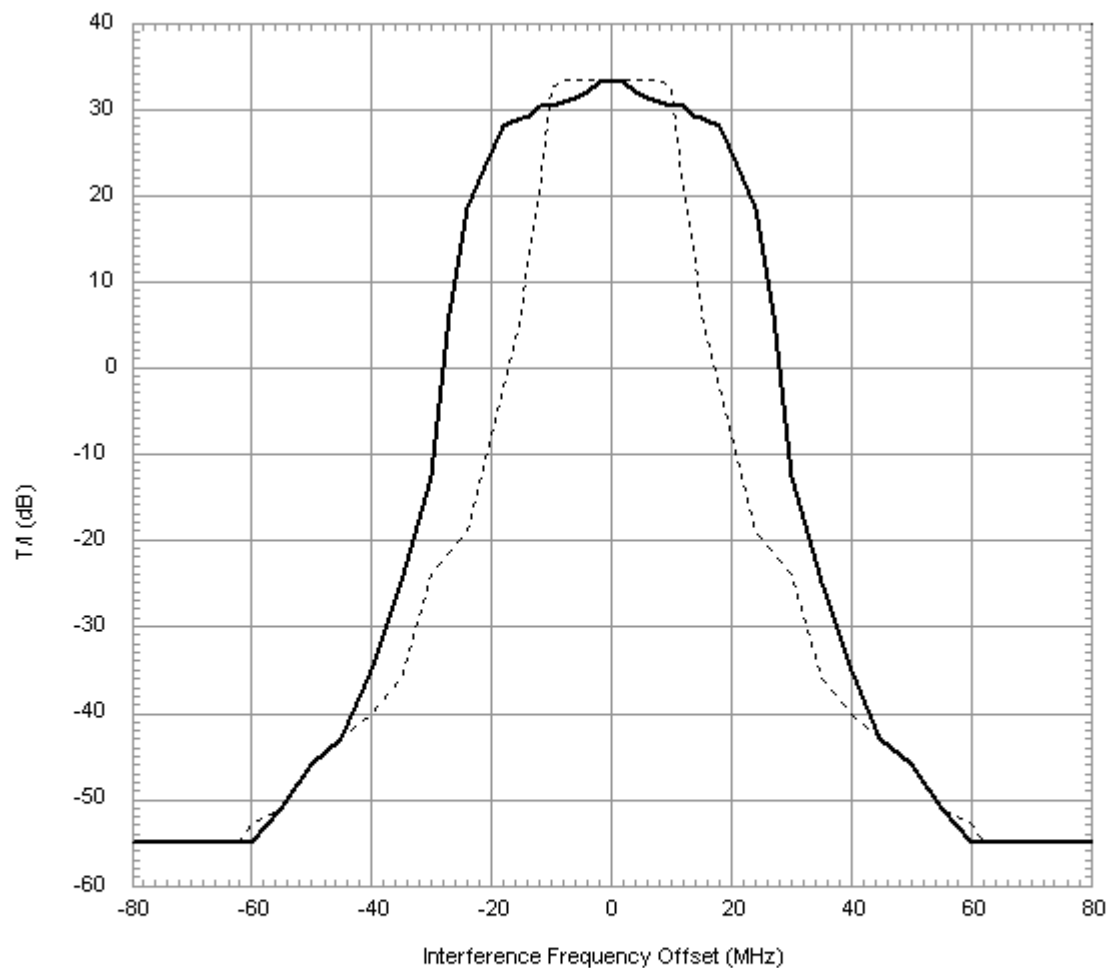


Figure 7-8: Typical threshold-to-interference (T/I) curve (6, 7/8, 10/11 GHz, 4DS3)

**KEY:**

- Like Interferer
- - - - - Analog (CW) Interferer

Radio:

Capacity:

Frequency Band:

Date:

Constellation

4xDS3

6, 7/8, 10/11 GHz


8/22/03

Receiver Signal-to-Noise Characteristics

BER versus C/N Curve

The Receiver C/N curve indicates how signal to noise affects the BER.

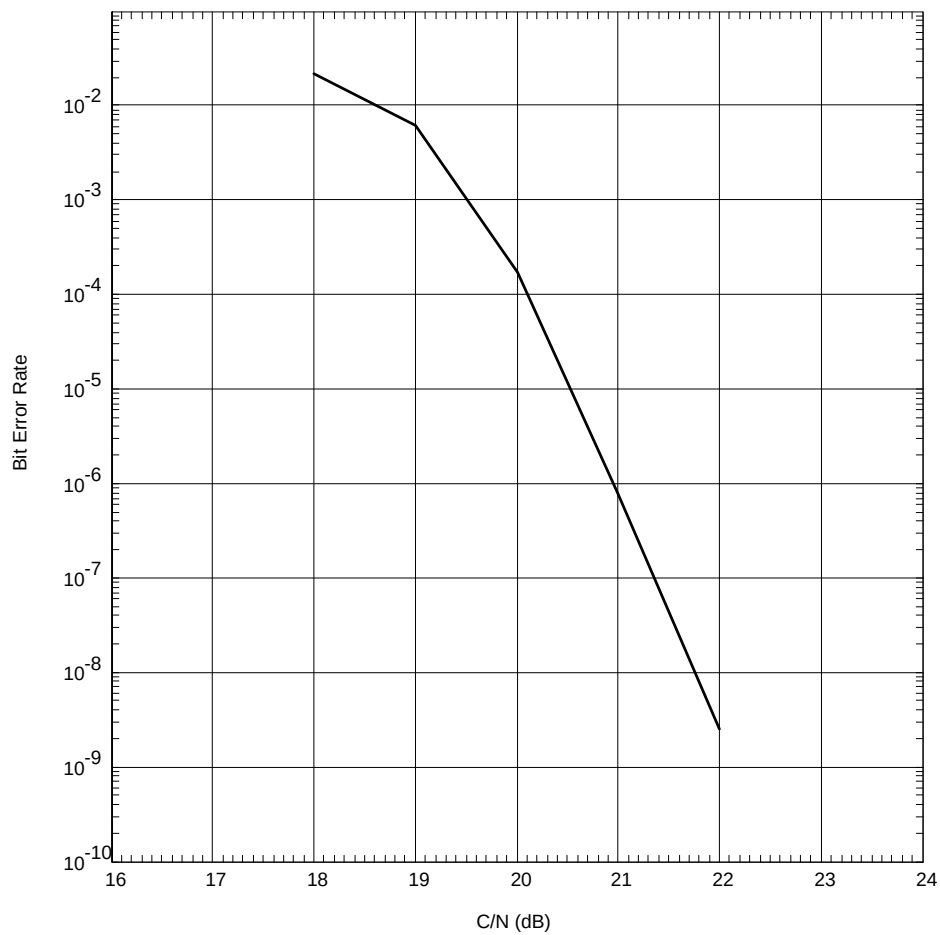Figure 7-9: Typical BER versus C/N curve (8 DS1)



KEY:

— BER vs. C/N

Radio:

Capacity:

Frequency Band:


Date:

Constellation

8 DS1

5850 - 11700 MHz

10/6/99

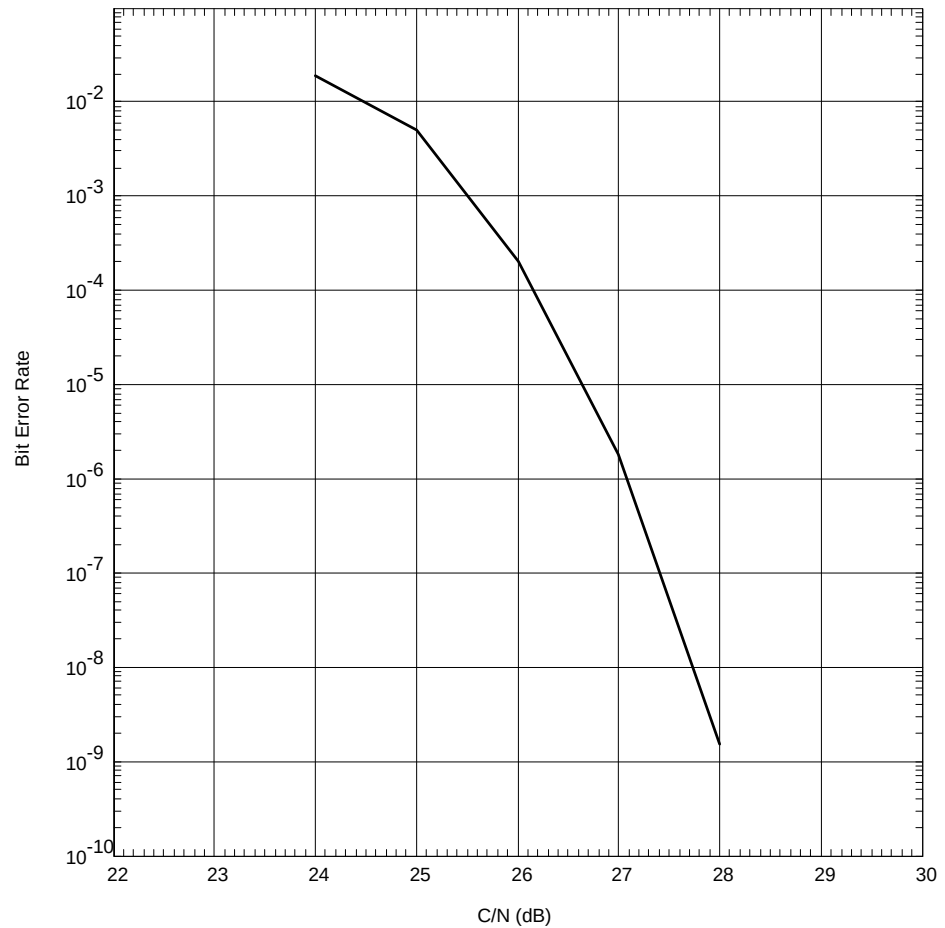Figure 7-10: Typical BER versus C/N curve (16 DS1)

KEY:

— BER vs. C/N

Radio:

Capacity:

Frequency Band:


Date:

Constellation

16 DS1

5850 - 11700 MHz

10/6/99

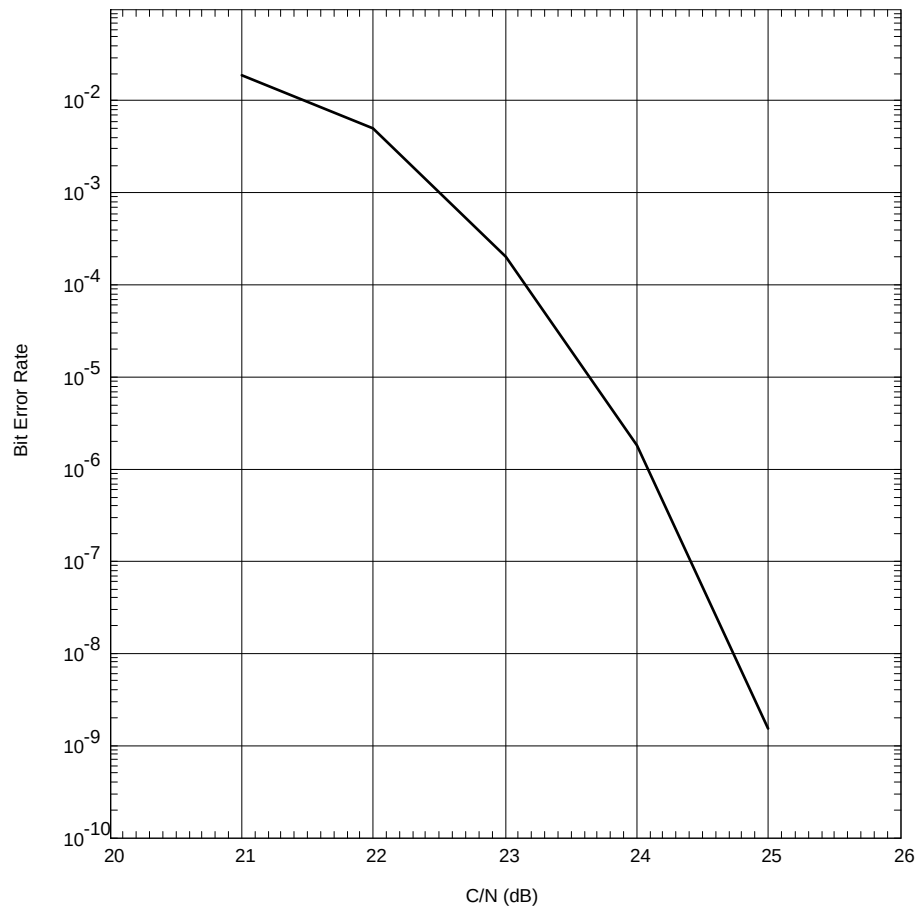Figure 7-11: Typical BER versus C/N curve (28 DS1/DS3)

KEY:

— BER vs. C/N

Radio:

Capacity:

Frequency Band:

Date:

Constellation

28 DS1/DS3

5850 - 11700 MHz

10/6/99

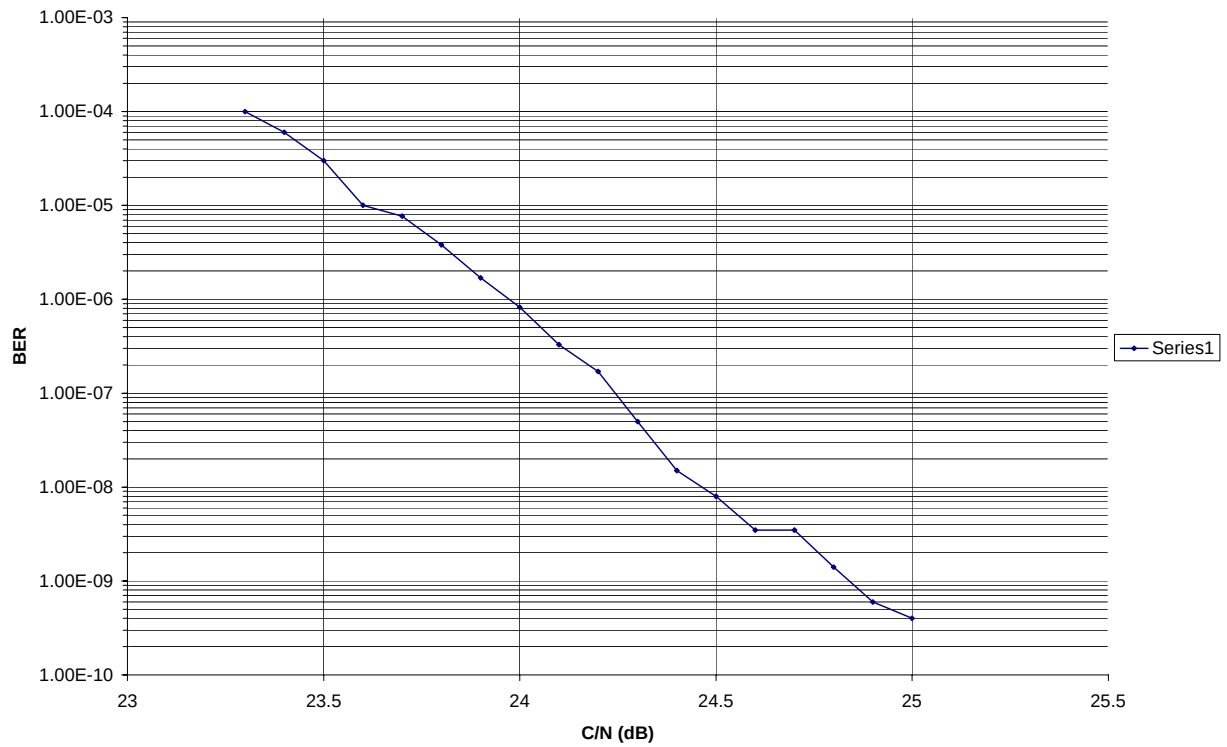
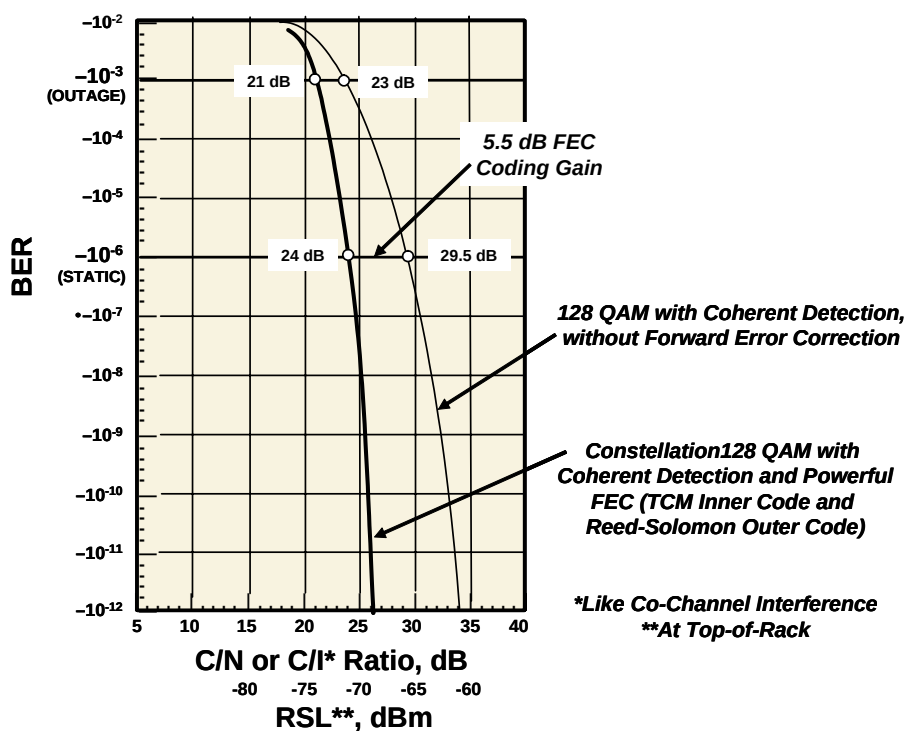
Figure 7-12: Typical BER versus C/N curve (Constellation 155)

Figure 7-13: Typical BER vs. C/N and C/I (Constellation 155)


BER vs. C/N and C/I*

BER versus RSL Dynamic Range

The increase of BER as the result of a faded RSL indicates the sensitivity of the Receiver. The curve includes the received signal overload characteristics.

The dynamic range of the Receiver is the range from the low RSL to the high RSL at 10^{-6} BER or other BER (10^{-3} outage, 10^{-13} error-free, and so forth).

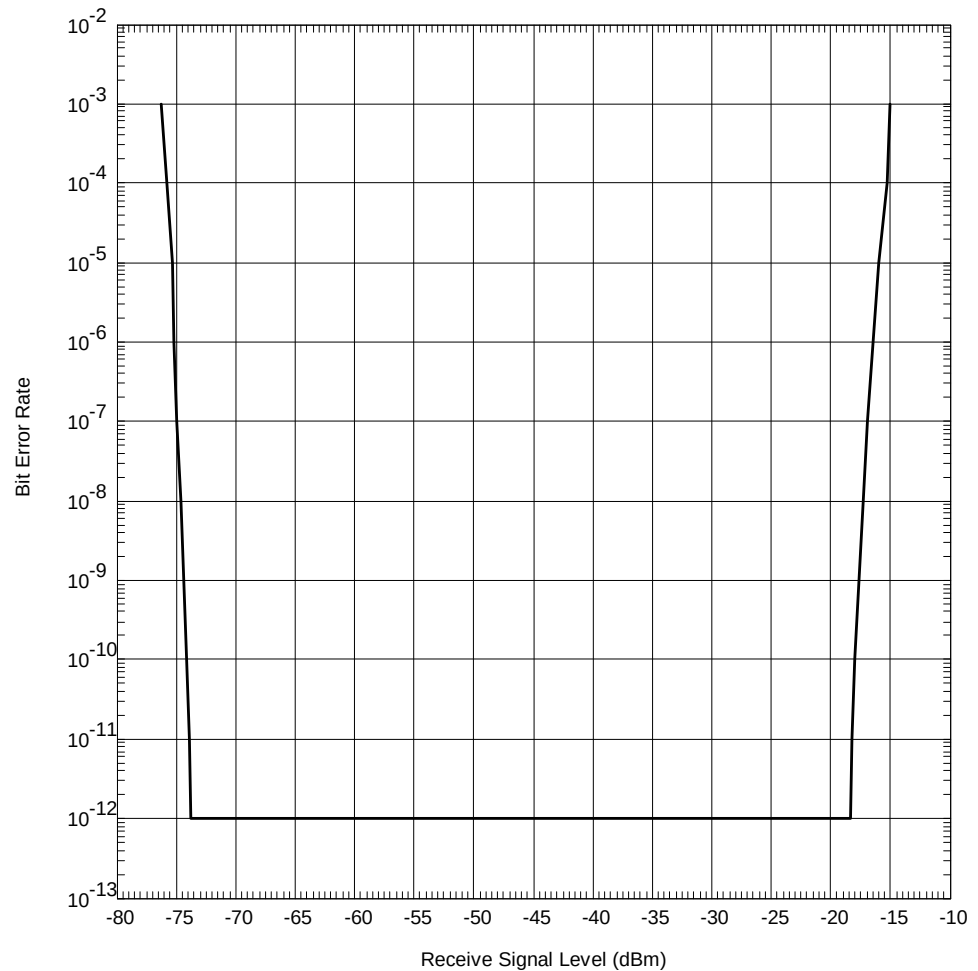Figure 7-14: Typical BER versus RSL curve



KEY:

— BER vs. RSL

Radio:

Constellation

Capacity:

16 DS1

Frequency Band:

5850 - 6875 MHz

Date:

12/7/99

APPENDIX

A

RACK PROFILES

19-inch Rack Frame

Figure A-1 and Figure A-2 show the Harris standard rack dimensions.

Figure A-1: EIA 19-inch rack frame and pedestal detail (top view)

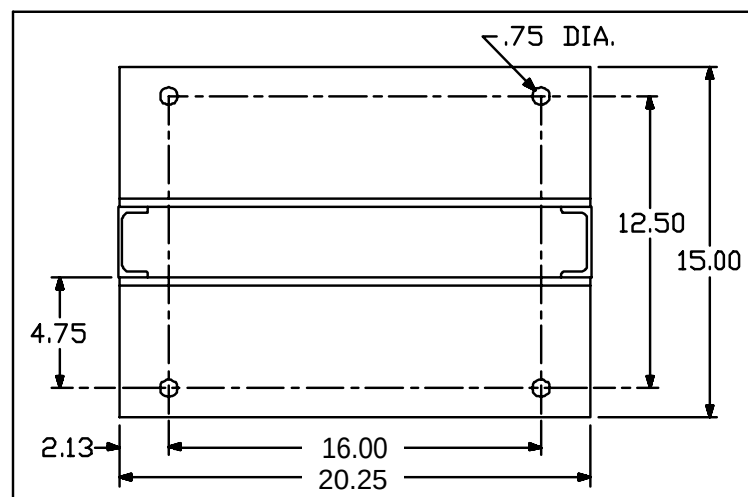
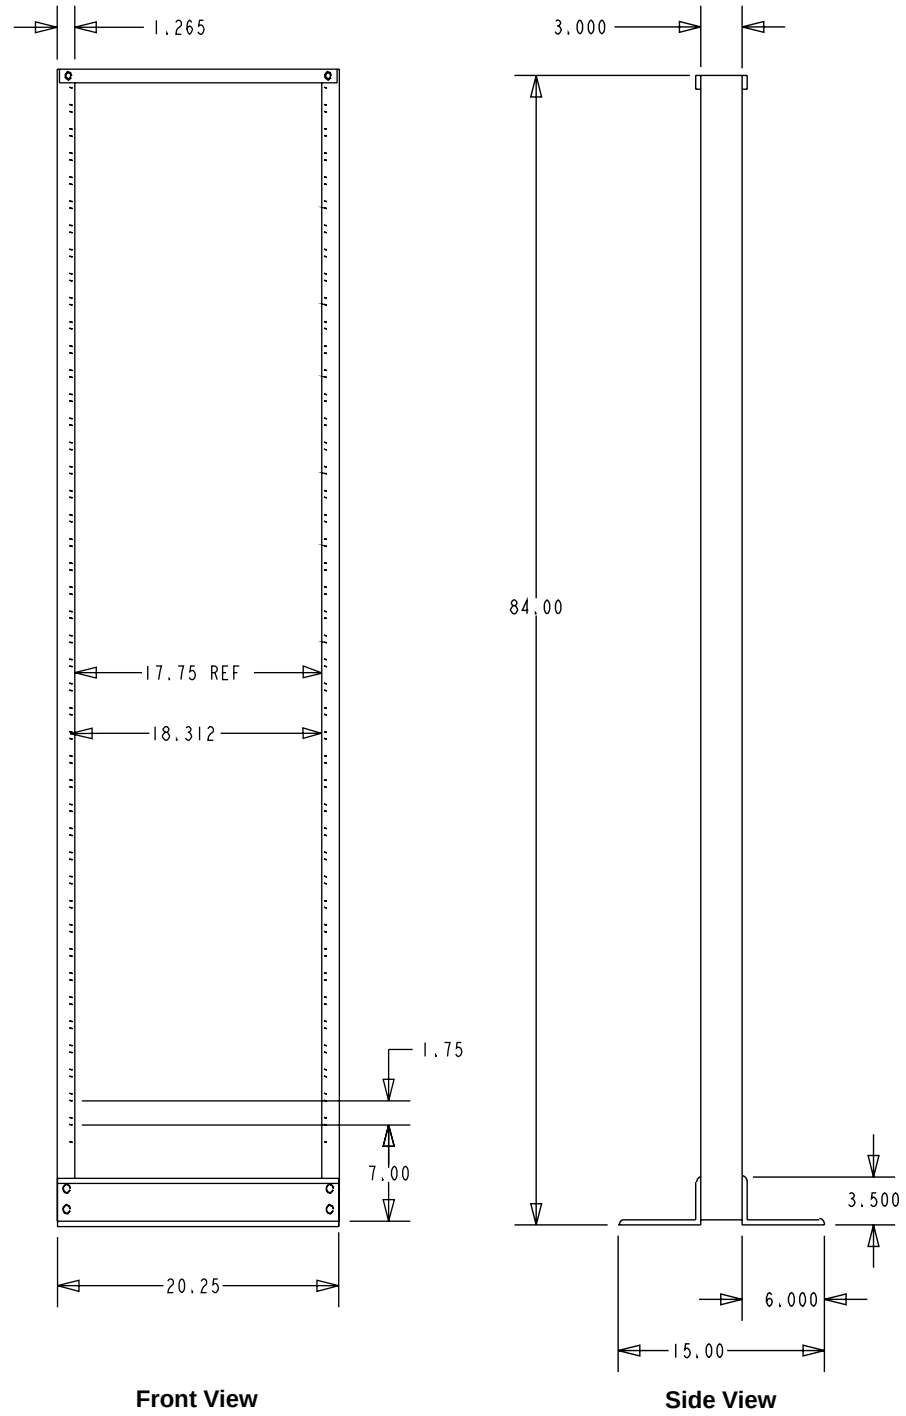


Figure A-2: EIA 19-inch rack frame and pedestal detail

GLOSSARY

A

ACU. Antenna Coupling Unit.

AGC. Automatic Gain Control; automatic gain adjustment of a varying input signal level to produce a constant output signal level.

AIS. Alarm Indication Signal.

AMI. Alternate Mark Inversion.

AMSL. Above Mean Sea Level.

ANSI. American National Standards Institute.

ATDE. Adaptive Time Domain Equalizer.

ATPC. Automatic Transmitter Power Control.

AUX. Auxiliary port.

B

B8ZS. Bipolar with Eight Zero Substitution.

baseband. A frequency band occupied by a modulating information signal.

Belcore. Bell Communications Research, Inc. (source of telephony standards in the U.S.A.).

BER. Bit Error Ratio.

BERT. Bit Error Ratio Tester.

C

CAN. Controller Area Network. An interface standard (ISO 11898) for interconnecting microcontrollers.

CFM. Composite Fade Margin.

CGA. Carrier Group Alarm.

CPE. Customer Premises Equipment.

CW. Continuous Wave.

D

DACS. Digital Access and Cross-connect System.

DADE. Differential Absolute Delay Equalization. A method for aligning, in time, two identical data streams that are traveling through channels of differing length (time).

DFM. Dispersive Fade Margin.

D connectors, subminiature. The size of the subminiature D connector is specified by the standard shell size and the number of connectors. For example, a 15-pin connector is referred to as a DA-15. See the following table.

Standard Shell Size	No. of Connectors
E	9
A	15
B	25
C	37
D	50

DCS. Digital Cross-connect System.

DTMF. Dual-Tone MultiFrequency.

E

EFS. Error-Free Seconds.

EIA. Electronic Industries Association.

EMI. Electro-Magnetic Interference.

ERP. Effective Radiated Power.

ES. Errored Seconds.

ETSI. European Telecommunications Standards Institute.

F

FarScan. Harris' network management system software.

FCC. Federal Communications Commission (U.S.).

FD. Frequency Diversity. Diversity transmission and reception in which the same information signal is transmitted and received simultaneously on two or more independently fading carrier frequencies.

FEC. Forward Error Correction.

FFM. Flat Fade Margin.

FITs. Failures In Time (10^9 hours).

H

HLM. High Level Mux.

hop. The span between a transmitter and a receiver.

HS. Hot Standby.

I

IEC. International Electrotechnical Commission.

IF. Intermediate Frequency; frequency below the radio frequency.

IFM. Interference Fade Margin.

IP. Internet Protocol.

ISO. International Organization for Standardization.

ITU. International Telecommunication Union.

J

JF. JackField.

L

LAN. Local Area Network.

LED. Light-Emitting Diode.

LNA. Low-Noise Amplifier.

LNC. Low-Noise Converter.

Loopback Test. A test of the coupling of a signal from the transmitting path back to the local receiving path.

LOS. Loss Of Signal.

M

M12. A multiplexing method that transforms between 1 DS1 up to 4 DS1 input/outputs and a T2 output/output.

M2X. A multiplexing method that transforms between 1 T2 up to 7 T2 input/outputs and a T3 output/output.

MCD. Microwave Communications Division, formerly Farinon Division.

MHSB. Monitored Hot StandBy.

MIB. Management Information Base.

MTBF. Mean Time Between Failures.

MTBO. Mean Time Between Outages.

MTR. Mean Time to Restore the circuit after failure.

MTTR. Mean Time To Repair.

MUX. MULTipleXer.

N

NMS. Network Management System.

Noise Figure. The ratio of the output noise power to the portion of the output noise power stemming from thermal noise at the input at standard noise temperature.

NP. NonProtected.

NRZ. NonReturn to Zero (coding).

NTIA. National Telecommunications and Information Administration (U.S.A.)

P

PA. Power Amplifier.

PBX. Private Branch Exchange.

PCB. Printed Circuit Board.

PCM. Pulse Code Modulation.

Q

QAM. Quadrature Amplitude Modulation. Quadrature modulation in which two carriers are amplitude-modulated.

R

RF. Radio Frequency.

RFI. Radio Frequency Interference.

RIP. Routing for Internet Protocol.

RMS. Root Mean Square.

RSL. Received Signal Level.

RTU. Remote Terminal Unit.

RX. Receiver.

S

SAI. System Application Information.

SCAN. System Control And Alarm Network. Harris' proprietary standard for sending alarm/status/control messages over a serial port.

SD. Space Diversity. Pertaining to signal transmission and reception in which two or more separate and independent propagation media or paths are used for transmitting the same information.

SES. Severely Errored-Seconds.

SLVA. Successive Log Video Amplifier.

SNMP. Simple Network Management Protocol.

SNR. Signal-to-Noise Ratio.

SPU. Signal Processing Unit.

SPUR. Extended SCAN port. A communications channel branching off from the trunk and generally carrying less traffic than the trunk.

ST. Split Transmitters.

T

TCM. Trellis-Coded Modulation.

TFM. Thermal Fade Margin.

T/I. Threshold-to-Interference ratio.

TIA. Telecommunication Industries Association.

TOR. Top Of Rack.

TSL. Transmitted Signal Level.

TX. Transmitter.

U

UBER. Uncorrected Bit Error Ratio.

V

VF. Voice Frequency.

VSF. Very Severe Burst.

W

WAN. Wide Area Network.

X

XMTR. Transmitter.

INDEX

Numerics

- 1+1 frequency spacing 2-1
- 1+1 intermodulation products 2-2
- 1+1 switching times 4-16
- 1+1 Transmitter and Receiver switching 4-15
- 10Base-T 4-16, 5-8
- 3x3DS3 system
 - add-drop mode 3-2
- 3xDS3 compatibility 3-2

A

- ACU. See Antenna Coupling Unit.
- add-drop in repeater configuration 3-1
- add-drop mode
 - 3xDS3 system 3-2
- address, DTMF receiver decoder 5-5
- alarm inputs 4-17
- alarm list for relay output 4-18
- alarms monitoring 3-4
- aluminum rack 4-19
- ambient temperature 4-19
- ANSI 4-13
- antenna
 - feeder 2-2
- Antenna Coupling Unit
 - available configurations 6-2
 - mechanical drawings 6-3
 - port configurations 6-9
 - specifications 6-1
- asynchronous start-stop signals 5-5

B

- battery noise level 4-2
- Bellcore 4-12, 4-19
- BER
 - residual, Receiver 4-10

- BER versus C/N curve 7-12
- BER versus RSL dynamic range curve 7-17
- bridged data ports 5-5

C

- C/N curve, Receiver 7-12
- capacity
 - narrow/medium 3-1
- CAU 5-7
- channel assignments 2-4
- compatibility, 3xDS3 and HLM-155 3-2
- configuring
 - Service Channel 3-12
- Constellation Radio 3-1
 - platform 3-1
- Constellation radio
 - dimensions 4-20
 - interconnection 5-1
 - ports 5-7
 - VF ports 5-2
 - weights 4-20
- Constellation radios 1-1
- control outputs 4-17
- cost-effective communication solutions 1-2
- curves
 - performance 7-1

D

- DA-15 5-3
- data orderwire interface 5-5
- data ports
 - bridged 5-5
 - RS-232 5-5
- DB-25 5-2, 5-7
- DC-37 5-2
- DE-9 5-2, 5-7
- degradation, threshold 2-2
- diagnosing through the Keypad 3-4
- dimensions
 - Constellation 4-20

- dispersive fade margin, Receiver 4-11
- dry relay contacts 4-18
- DS3-to-DS3 interface, number of hops 3-2
- DTMF receiver decoder 5-5
- DVA 5-7
- DVS II
 - orderwire 5-5
 - orderwire interconnection 5-2
- dynamic range, Receiver 7-17

E

- earthquake standards 4-19
- electromagnetic emissions 4-19
- emission limitations 4-10
- environmental specifications 4-19
- equipment transmission delay time 4-14
- Errored Seconds alarm 4-18
- Ethernet port
 - Constellation 4-16, 5-8
- ETS 300 826 4-19
- External Alarm/Control connector 4-18

F

- FarScan 3-4
 - connection 4-16
- FCC 4-10, 4-19
- feeder, antenna 2-2
- flange specifications 6-1
- four-wire VF orderwire interface 5-4
- four-wire VF specifications 5-4
- frequency bands 2-1
- frequency spacing
 - 1+1 2-1
- frequency stability
 - Receiver 4-10
 - Transmitter 4-10

- full duplex 5-5
- fuse panel 4-2

G

- GlobeStar 5-7
- glossary B-1

H

- half-duplex communications 5-5
- High Level Mux
 - repeater configuration 3-12
 - source timing mode 3-12
 - terminal configuration 3-12
 - through timing mode 3-12
- HLM. See High Level Mux.
- HLM-155 compatibility 3-2
- hops, DS3-to-DS3 3-2
- hot-standby
 - protection 4-15
- humidity 4-19

I

- image rejection, Receiver 4-10
- input noise level 4-2
- interconnection
 - SCAN and Constellation 5-7
 - Service Channel and Constellation 5-1
- interfaces
 - network management 4-16
 - supervisory 4-16
- intermodulation frequency products 2-2
- intermodulation products, 1+1 2-2
- ISO 9001 ii-ix
- ITU-T 4-12

J

- jitter
 - tributary 4-12

jitter accumulation, minimizing 3-12

K

Keypad 3-4, 4-18, 5-4, 5-5

Keypad port 4-16

L

LED indicators 4-17

liability 1-3

like signal T/I 7-3

Local Off Hook 3-12

LOS

alarm 4-18

M

M12 Unit

power consumption 4-1

Major Alarm 4-18

Manual Control, configurable 4-18

manual switch-over 4-16

medium capacity radio 3-1

MegaStar 5-2

MicroStar 5-2, 5-7

Minor Alarm 4-18

minor alarm

locking of RF modules 4-16

modulation characteristics 4-14

N

narrow/medium capacity radio 3-1

NetBoss 3-4

network management 3-4

network management interfaces 4-16

noise level

battery 4-2

input 4-2

noise, power source 4-2

O

off-hook telephone set 5-4

On Line

HLM 4-18

Mod/Tx 4-18

Rx 4-18

on-hook 5-4

on-hook telephone set 5-4

opto-isolated alarm inputs 4-17

overload, Receiver 4-11

P

paired frequencies 2-4

parity option, enabled 5-5

performance curves 7-1

jitter characteristics 7-17

Receiver signal-to-noise characteristics 7-12

platform, Constellation Radio 3-1

ports, Constellation 5-7

power

specifications 4-1

power input 4-2

power source

noise 4-2

voltage 4-2

protection switching 4-15

R

rack

aluminum 4-19

rack frame dimensions, mechanical A-2

radio interface tool 3-4

Receiver

C/N curve 7-12

dispersive fade margin 4-11

dynamic range 7-17

frequency stability 4-10

image rejection 4-10

overload 4-11

protection switching 4-15

residual BER 4-10

signal acquisition time 4-11

specifications 4-10

regulatory information 2-17

relay contacts, dry 4-18

relay outputs 4-17

relay specifications 4-18

repeater configuration

add-drop 3-1

- repeater configuration, HLM 3-12
- residual BER, Receiver 4-10
- reverse path protection software 4-15
- RF performance specifications 4-3
- ringing generator specifications 5-4
- RJ11 5-5
- RJ45 5-2, 5-4, 5-5, 5-7, 5-8
- RS-232 data ports, bridged 5-5
- RS-232 interconnection 5-7
- RS-422 5-7
- RS-423 5-7

S

- sampling data 5-5
- SCAN
 - interconnection 4-16
- SCAN and Constellation interconnection 5-7
- Service Channel
 - configuration 3-12
 - interconnection 5-1
- shock 4-19
- signal acquisition time, Receiver 4-11
- Signal Degradation alarm 4-18
- signal processing specifications 4-14
- signal-to-noise characteristics, Receiver 7-12
- single antenna configurations 2-2
- site status inputs 4-17
- SNMP 3-4, 4-16
- software, reverse path protection 4-15
- source timing mode for HLM 3-12
- space diversity
 - Receiver switching 4-15

- spacer adapter height 6-1
- specification compliance, tributary 4-13
- specifications
 - 4-wire VF ports 5-4
 - ACU 6-1
 - environment 4-19
 - flange 6-1
 - four-wire VF 5-4
 - power 4-1
 - relay 4-18
 - RF performance 4-3
 - ringing generator 5-4
 - technical 4-1
 - top of rack antenna port 4-3
 - Transmitter 4-10
- start-stop, asynchronous 5-5
- StarView 3-4, 5-8
- supervisory interfaces 4-16
- switching
 - protection 4-15
 - times 4-16
- Sync Loss A alarm 4-18
- Sync Loss B alarm 4-18
- synchronization configuration 3-12

T

- T/I
 - curves 7-4
- T/I curve 7-2
- T/I like signal 7-3
- technical specifications 4-1
 - Receiver 4-10
 - signal processing 4-14
 - Tributary Interface 4-12
- telephone set 5-4
 - off-hook 5-4
- temperature, ambient 4-19
- terminal configuration, HLM cards 3-12
- threshold
 - degradation 2-2

- threshold-to-interference (T/I) ratio 7-2
- through timing mode for HLM 3-12
- times, 1+1 switching 4-16
- top of rack antenna port specifications 4-3
- transmission delay per hop 4-14
- Transmitter
 - frequency stability 4-10
 - protection switching 4-15
 - specifications 4-10
 - unwanted emissions 4-10
- Tributary Interface
 - technical specifications 4-12
- tributary jitter 4-12
- tributary signal characteristics 4-12
- tributary specification compliance 4-13
- two-wire VF orderwire interface 5-5

U

- unwanted emissions, Transmitter 4-10
- upgradability 3-1

V

- VF orderwire interface
 - 2-wire 5-5
 - 4-wire 5-4
- VF ports, Constellation 5-2
- vibration 4-19
- voltage
 - power source 4-2
- VT100-compatible terminal 3-4

W

- waveguide flange specifications 6-1
- weights, Constellation 4-20

Z

- zone 2 4-19
- zone 4 4-19

SAI-112874-E09

